


Support Post (Metric)

Spacer Bolts DII

[Polyamide, UNC-thread]

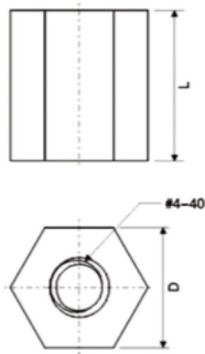


Spacer bolts
Type thread / thread
Styles internal / internal
Material Nylon 6/6 V0 / DMS 806
Colour black / natural
Unit mm
Standard Pack 500 pcs

Standard Lengths "L" in 1 mm increments available

Order No.	Colour	"D"	"L"	"Inch"
8G5134-40x8.0	B N	6.4	8.0	#4-40

Ordering example: 8G5134-40x8.0B for black

[Polyamide, metric thread]

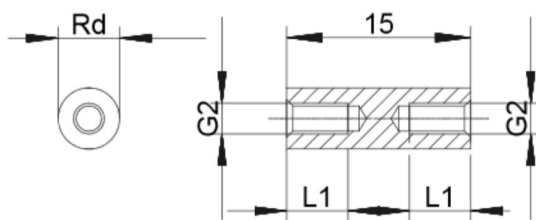

Spacer bolts
Type round
Styles internal / internal
Material Polyamide 6.0 GV / DMS 825
Colour black
Standard Pack from 100 pcs

Thread lengths [mm]

Thread G2	L (mm)	L1 (mm)
M2 / M2.5	to 14	Dead-end thread
	15-20	half length
	from 21	10
M3	to 15	Dead-end thread
	16-20	half length
	from 21	10
M4 / M5 / M6	to 20	Dead-end thread
	from 21	10

Contact resistance DIN 53 482: $>10^{12}$ Ohm/cm

Dielectric strength DIN 54 481: 40 kV/mm

Tolerance for length dimensions: +/- 0,1 mm

Order No.	Diameter (mm)	Thread	Standard lengths in mm-increments
181 rd x (length)	4	M2	from 5 mm to 45 mm
182 rd x	5	M2,5	from 4 mm to 55 mm
185 rd x	6	M3	from 5 mm to 60 mm
187 rd x	8	M4	from 5 mm to 65 mm

GV: Glass fibre reinforced

Ordering example: 185rd x 30 = DII / rd6 / Polyamide GV / M3 / x 30