


LED Signalleuchten LED Panel Mount Indicators

EINBAUDURCHMESSER
MOUNTING HOLE


Innenreflektor Sonnenlicht tauglich mit Vorwiderstand und Einweggleichrichter IP67 / Recessed (interior) bezel sunlight visible with resistor and half-wave rectifier IP67

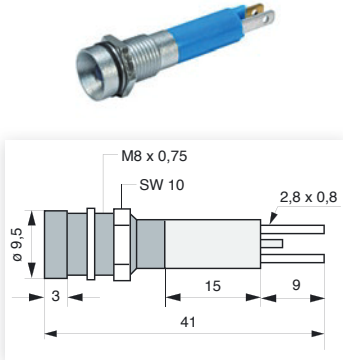

Part Number	Colour	Voltage	Typ. Current	Typ. Lumi. Intensity
Hochglanzverchromter Metallreflektor / Satin chrome bezel				
19090250	red	12V AC/DC	9mA AC / 17mA DC	1200mcd
19090255	green	12V AC/DC	9mA AC / 17mA DC	1300mcd
19090252	yellow	12V AC/DC	9mA AC / 17mA DC	1100mcd
19090257	blue	12V AC/DC	9mA AC / 17mA DC	600mcd
1909025W	white	12V AC/DC	3mA AC / 6mA DC	1000mcd
19090350	red	24V AC/DC	9mA AC / 17mA DC	1200mcd
19090355	green	24V AC/DC	9mA AC / 17mA DC	1300mcd
19090352	yellow	24V AC/DC	9mA AC / 17mA DC	1100mcd
19090357	blue	24V AC/DC	9mA AC / 17mA DC	600mcd
1909035W	white	24V AC/DC	3mA AC / 6mA DC	1000mcd
Schwarzverchromter Metallreflektor / Black chrome bezel				
19091250	red	12V AC/DC	9mA AC / 17mA DC	1200mcd
19091255	green	12V AC/DC	9mA AC / 17mA DC	1300mcd
19091252	yellow	12V AC/DC	9mA AC / 17mA DC	1100mcd
19091257	blue	12V AC/DC	9mA AC / 17mA DC	600mcd
1909125W	white	12V AC/DC	3mA AC / 6mA DC	1000mcd
19091350	red	24V AC/DC	9mA AC / 17mA DC	1200mcd
19091355	green	24V AC/DC	9mA AC / 17mA DC	1300mcd
19091352	yellow	24V AC/DC	9mA AC / 17mA DC	1100mcd
19091357	blue	24V AC/DC	9mA AC / 17mA DC	600mcd
1909135W	white	24V AC/DC	3mA AC / 6mA DC	1000mcd
Mattverchromter Metallreflektor / Matt chrome bezel				
19092250	red	12V AC/DC	9mA AC / 17mA DC	1200mcd
19092255	green	12V AC/DC	9mA AC / 17mA DC	1300mcd
19092252	yellow	12V AC/DC	9mA AC / 17mA DC	1100mcd
19092257	blue	12V AC/DC	9mA AC / 17mA DC	600mcd
1909225W	white	12V AC/DC	3mA AC / 6mA DC	1000mcd
19092350	red	24V AC/DC	9mA AC / 17mA DC	1200mcd
19092355	green	24V AC/DC	9mA AC / 17mA DC	1300mcd
19092352	yellow	24V AC/DC	9mA AC / 17mA DC	1100mcd
19092357	blue	24V AC/DC	9mA AC / 17mA DC	600mcd
1909235W	white	24V AC/DC	3mA AC / 6mA DC	1000mcd

Lichtstärkeangaben der verwendeten LED bei DC-Betrieb / Luminous intensity data of the LED on direct voltage
 Maximale Frontplattenstärke 8mm / Maximum panel thickness 8mm
 Andere Spannungen auf Anfrage / Other voltages on request

Außenreflektor blinkend IP40 / Prominent (exterior) bezel flashing IP40

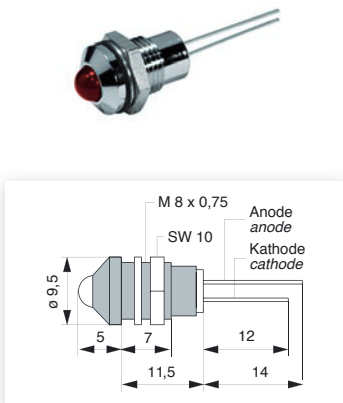

Part Number	Colour	Voltage	Typ. Current	Typ. Lumi. Intensity
Hochglanzverchromter Metallreflektor / Satin chrome bezel				
19060003	red	3,5-13V DC	38-56mA DC	80mcd at 20mA
19060001	green	3,5-13V DC	38-56mA DC	32mcd at 20mA
19060002	yellow	3,5-13V DC	38-56mA DC	32mcd at 20mA
Schwarzverchromter Metallreflektor / Black chrome bezel				
19061003	red	3,5-13V DC	38-56mA DC	80mcd at 20mA
19061001	green	3,5-13V DC	38-56mA DC	32mcd at 20mA
19061002	yellow	3,5-13V DC	38-56mA DC	32mcd at 20mA
Mattverchromter Metallreflektor / Matt chrome bezel				
19062003	red	3,5-13V DC	38-56mA DC	80mcd at 20mA
19062001	green	3,5-13V DC	38-56mA DC	32mcd at 20mA
19062002	yellow	3,5-13V DC	38-56mA DC	32mcd at 20mA

Maximale Frontplattenstärke 5,5mm / Maximum panel thickness 5.5mm

6 mm

8 mm

12 mm

14 mm

16 mm

19 mm

22 mm

ZUBEHÖR
ACCESSORIES