

For correct operation, the device should be connected to a power outlet with the earthing pin. The device should be used indoors, where the electric installation utilises unambiguously identified wires: phase and neutral.

The pin grid array of the power socket should look like figure 1:



PE – safety contact | N – neutral contact | L-phase contact  
Fig. 1 The pin grid array of the power socket (PN-E-93201:1997)

To connect the EVER surge protector:

- connect the outlet plug of the surge protector to the power outlet,
- plug in the outlet plugs of the protected devices to the power outlets on the surge protector
- switch on the mains switch,

**NOTE!** In the case of OFFICE PLUS surge protector setting switch to OFF position, will disconnect power only in bottom unit.

Status indication of functional blocks:

- the voltage in power sockets will be indicated by lighted power switch (OFFICE PLUS surge protector) or by lighted power on indicator (HOME surge protector)
- protection of inverters will be indicated by the highlighted diode (Protected).
- no backlighting LEDs (Protected) indicates an external power failure or activation of a protections.

#### OPERATION GUIDELINES

• If there is no power in the protector's sockets (the switch is not illuminated), make sure there is power in the mains socket to which the device is connected. If there is still no power on the protector's sockets, despite the fact that there is power on the protector's input plug, the device must be repaired. For repair information see [www.ever.eu](http://www.ever.eu).

• The power strip should only be used in systems with safety contact (earthing pins)!

• Taking into consideration the type and fuse location, the safety systems applied in the building system are used as one of the security measures.


**NOTE!** The surge protector is fully disconnected from the power network by unplugging the power lead plug from the socket, which should be easily accessible and located close to the device. Product is designed for indoor use. Protect the device from humidity.

**UWAGA!** EVER power strips, surge protectors and filter surge protectors are not intended for use with medical equipment, especially with life support equipment!


PARAMETERS \ NAME	OFFICE PLUS	HOME
Part number	T/LZ06-0FP018/0000	T/LZ05-HOM019/0000
Type	Surge protector	Filter surge protector
Rated voltage and frequency	~ 250 V / 50 Hz	
Maximum current (total)	10 A	
Single outlet maximum load	Circular 10 A, flat 6 A	10 A
Maximum power (total)	2500 W	
Number and type of power outlets	5 + 2; in accordance with NF C 61-314; System Child Protection	8; in accordance with NF C 61-314; System Child Protection
Circuit breaker	1 x automatic fuse 10 A	
Type of surge protection	SPD typ 3	
Protected lines	L - N, L - PE, N - PE	
Energy absorption (total)	918 J	
Test voltage $U_{OC(L-N)}$	6 kV	
Test voltage $U_{OC(L-N-PE)}$	6 kV	
Voltage protection level $U_{P(L-N)}$	1,79 kV	1,3 kV
Voltage protection level $U_{P(L-N-PE)}$	1,79 kV	1,3 kV
Continuous operating voltage $U_c$	~ 250 V	~ 275 V
TEL / FAX / MODEM / LAN protection	No	Combo RJ11 / RJ45 1 - INPUT, 1 - OUTPUT 10 / 100 Base-T
RTV protection	No	Coaxial Bandwith: 300 kHz ~ 2.2 GHz Attenuation: < 0.1 dB
RFI / EMI Filter	No	Yes
USB Charger	2x Port 5 V / 2,4 A (max)	No
Indicators	1x LED (Protected <sup>1</sup> )	2x LED (Power ON <sup>2</sup> , Protected <sup>1</sup> )
Plug	NF C 61-314	
Power switch	2-pole lighted (Top Unit)	2-pole
Dimensions [W x D x H]	55 x 270 x 38 mm; 60 x 178 x 50 mm Top Unit	120 x 280 x 35 mm
Power cord length	1,8 m ± 1,2 m	2 m
Net weight	816 g	682 g
Warranty	5 years	
Insurance	2500 EUR	

Note: The manufacturer reserves the right to change the mentioned above parameters without notice.

#### OFFICE PLUS

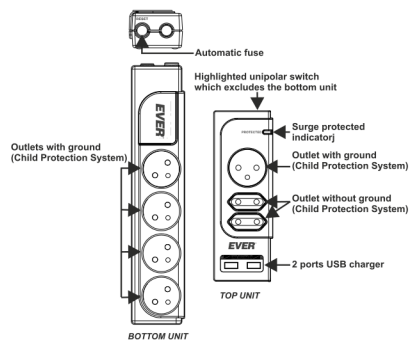

#### HOME

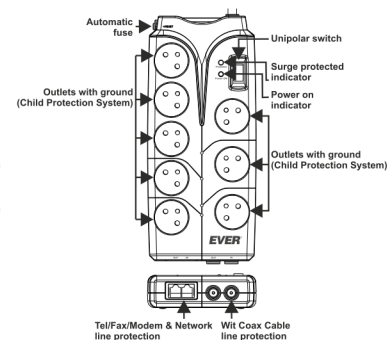

Appropriate utilisation of used up electric and electronic equipment helps to avoid consequences resulting from the presence of dangerous materials, as well as inappropriate disposal and processing of such equipment, which may be hazardous to human life and the environment. (Act dated 29 July 2005 on used up electric and electronic equipment, article 22.1 items 1 and 2).

According to the regulations binding in the European Union, a crossed rubbish bin symbol means that when a product is no longer used it should be disposed of at a special waste pickup site. This concerns the device itself, as well as other accessories marked with this symbol. Do not dispose of those products together with unsorted household waste.