

5 SOCKET OUTLETS WITH EARTHING PIN

AUTOMATIC FUSE

SOCKET OUTLETS SAFE FOR CHILDREN

ILLUMINATED DOUBLE POLE MAINS SWITCH

SURGE PROTECTION


2 AVAILABLE COLOUR VARIANTS

AVAILABLE CABLE LENGTHS: 1.5m, 3m, 5m

acar F5 is the most popular surge protective power strip among the devices manufactured under the brand name **acar**. With a length of less than 33cm it makes available five socket outlets with earthing. This amount in most applications is sufficient and its relatively small size make it easy to place it even on your desk. By applying the automatic fuse, **acar F5** can be called practically maintenance-free. High efficiency predisposes the device to become the basic surge protector, which is necessary in every place. Mounting brackets are optional and available from the distributor.

Technical data: acar F5

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	ΣI _N = 10A MAX
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _p	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20µs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20µs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	330x54x55mm
Weight	0.4kg

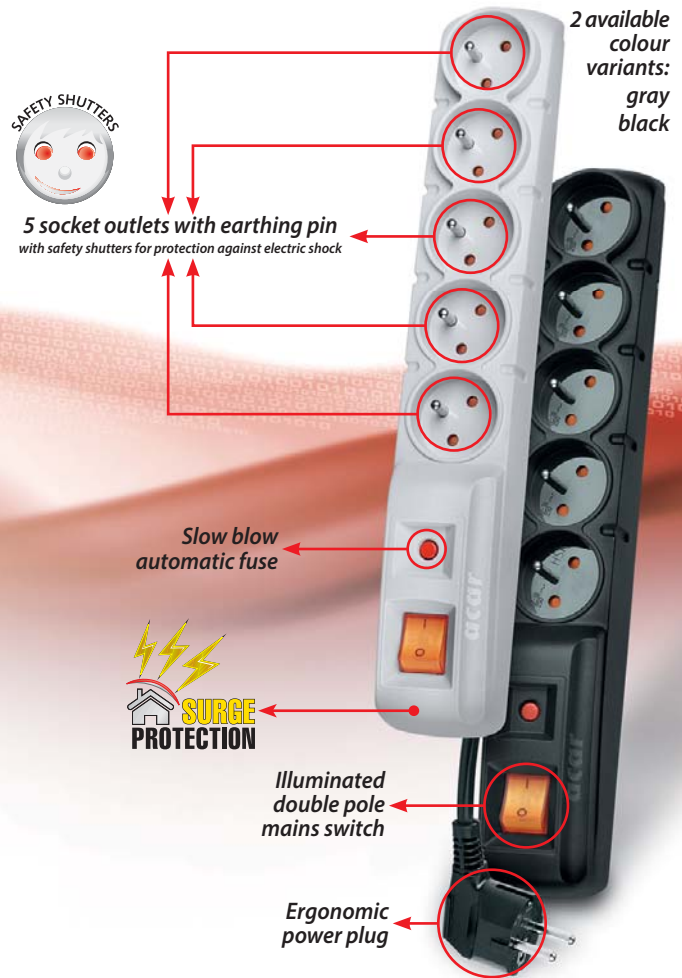

ILLUMINATED DOUBLE POLE MAINS SWITCH AND SLOW-BLOW AUTOMATIC FUSE



5 SOCKETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



4 POSSIBLE DIRECTIONS OF ARRANGEMENT OF THE POWER CABLE

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.