

Overview

The EF Series Flex Suppressor® is an effective suppressor for high frequency noise generated from electronic devices. The flexible sheet is a polymer base blended with micron sized magnetic powders dispersed into the material. The EF Series are effective for resonance and wave suppression, and can be cut into virtually any shape.

Applications

- Radiation noise suppression for electronic equipment
- Quasi-microwave range interference prevention inside and in between electronics
- Mobile communications equipment, wireless equipment (Wi-Fi, Bluetooth), office automation equipment (personal computers, TFT LCD's etc.), communication terminals in audio/video equipment, digital exchanges, etc.
- ESD (electro static discharge) countermeasure

Benefits

- Usable in quasi-microwave ranges
- Can be used in high-speed clocks (Up to 10 GHz)
- Thin, flexible material used in portable equipment
- Virtually no limitation in where it can be used
- Less time required for installation
- Resonance suppression – controls the high frequency current and suppresses unwanted electromagnetic resonance by creating impedance
- Electromagnetic wave suppression – suppresses the electromagnetic wave intruding the sheet by the magnetic loss of its composition



Part Number System

EFR	(01)-	240x240	T08	00
Series Type	Thickness	Standard Dimensions (mm)	Tape 1 Type Adhesive Tape Thickness	Tape 2 Type
EFR	(003)- = 0.03 mm	240 x 240	T08 = 0.03 mm	00 = Without PET tape Blank = Without Tape 1 Type
EFX	(005)- = 0.05 mm		T15 = 0.14 mm	
EFF	(007)- = 0.07 mm		T22 = 0.05 mm	
EFA	(01)- = 0.1 mm		T29 = 0.01 mm	
EFH	(02)- = 0.2 mm		Blank = No adhesive tape	
EFG	(03)- = 0.3 mm			
	(05)- = 0.5 mm (10)- = 1.0 mm			

Specifications

Features	Standard Specifications	High Magnetic Permeability Type	Extra High Magnetic Permeability Type	Flame Retardant Type, Red Phosphorus Free Type	High Frequency	High Temp. Reflow
Type	EFR	EFX	EFF	EFA	EFG	EFH
Effective Frequency	Up to 10 GHz					
Operating Temperature (°C)	-40 to +105					
Thickness (mm)	0.05/0.1/0.2/0.3/0.5/1.0	0.05/0.1/0.2/0.3/0.5	0.07/0.1/0.2/0.3	0.03/0.05/0.1/(0.2/0.3) ²	0.05/0.1/0.2/0.3	0.05/0.1
Standard Dimensions (mm)	240 x 240			240 x 240 (roll on request)	240 x 240	
Specific Gravity ¹	2.8 typical	3.2 typical	3.6 typical	3.1 typical	3.0 typical	3.1 typical
Tensile Strength (Mpa)	3.6 minimum	6.8 minimum	6.9 minimum	6.8 minimum	3.5 minimum	6.8 minimum
Surface Resistance (Ω)	1.0 x 10 ⁶ minimum	1.0 x 10 ⁵ minimum	1.0 x 10 ⁵ minimum	1.0 x 10 ⁶ minimum	1.0 x 10 ⁵ minimum	1.0 x 10 ⁶ minimum
Thermal Conductivity (W/m K)	0.22	0.22	0.4	1.3	0.22	1.3
Approved Standard	UL94 V-0	UL94 HB	UL94 V-0		UL94 V-1	UL94 V-0
	UL File No. E176124					
Environment	RoHS	Compliant				
	Halogen	Free				
	PVC	Free				
	Lead	Free				
	Red Phosphorus	—	Free	—	Free	—
Relative Magnetic Permeability (at 3 MHz)	60 typical	100 typical	130 typical	60 typical	20 typical	60 typical
Remarks	μ60 high permeability Various thickness Flame retardant (UL 94 V-0 certified)	μ100 high permeability Various thickness	Industry's highest magnetic permeability of μ130 with halogen free composition. Flame retardant (UL 94 V-0 certified)	μ60 high permeability. Red phosphorus free Flame retardant (UL 94 V-0 certified)	Excellent suppression of high frequency noise in Wi-Fi and higher bandwidths.	Can be mounted before reflowing

Above specifications are for the Flex Suppressor® alone (adhesives and etc. not included)

¹ Value in 23°C atmosphere

² Sheets with 0.2 mm and 0.3 mm thickness are lamination of 0.1 mm sheets.

Table 1 – Ratings & Part Number Reference


Part Number	Series	Thickness (mm)	Tape Thickness (mm)	Relative Magnetic Permeability @ 3 MHz	Specific Gravity (typical)	Tensile Strength (Mpa minimum)	Surface Resistance (Ω minimum)	Thermal Conductivity (W/m K)
EFR(005)-240x240T0800	EFR	0.05	0.03	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(01)-240x240T0800	EFR	0.1	0.03	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(02)-240x240	EFR	0.2	--	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(02)-240x240T0800	EFR	0.2	0.03	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(03)-240x240	EFR	0.3	--	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(03)-240x240T0800	EFR	0.3	0.03	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(05)-240x240	EFR	0.5	--	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(05)-240x240T1500	EFR	0.5	0.14	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(10)-240x240	EFR	1	--	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFR(10)-240x240T1500	EFR	1	0.14	60	2.8	3.6	1.0 x 10 ⁶	0.22
EFX(005)-240x240T0800	EFX	0.05	0.03	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(01)-240x240T0800	EFX	0.1	0.03	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(02)-240x240	EFX	0.2	--	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(02)-240x240T0800	EFX	0.2	0.03	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(03)-240x240	EFX	0.3	--	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(03)-240x240T0800	EFX	0.3	0.03	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(05)-240x240	EFX	0.5	--	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFX(05)-240x240T1500	EFX	0.5	0.14	100	3.2	6.8	1.0 x 10 ⁵	0.22
EFF(007)-240x240T0800	EFF	0.07	0.03	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFF(01)-240x240T0800	EFF	0.1	0.03	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFF(02)-240x240	EFF	0.2	--	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFF(02)-240x240T0800	EFF	0.2	0.03	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFF(03)-240x240	EFF	0.3	--	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFF(03)-240x240T0800	EFF	0.3	0.03	130	3.6	6.9	1.0 x 10 ⁵	0.4
EFA(003)-240x240T0800	EFA	0.03	0.03	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(005)-240x240T0800	EFA	0.05	0.03	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(01)-240x240T0800	EFA	0.1	0.03	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(02)-240x240	EFA	0.2	--	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(02)-240x240T0800	EFA	0.2	0.03	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(03)-240x240	EFA	0.3	--	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFA(03)-240x240T0800	EFA	0.3	0.03	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFG(005)-240x240T0800	EFG	0.05	0.03	20	3	3.5	1.0 x 10 ⁵	0.22
EFG(01)-240x240T0800	EFG	0.1	0.03	20	3	3.5	1.0 x 10 ⁵	0.22
EFG(02)-240x240	EFG	0.2	--	20	3	3.5	1.0 x 10 ⁵	0.22
EFG(02)-240x240T0800	EFG	0.2	0.03	20	3	3.5	1.0 x 10 ⁵	0.22
EFG(03)-240x240	EFG	0.3	--	20	3	3.5	1.0 x 10 ⁵	0.22
EFG(03)-240x240T0800	EFG	0.3	0.03	20	3	3.5	1.0 x 10 ⁵	0.22
EFH(005)-240x240T2200	EFH	0.05	0.05	60	3.1	6.8	1.0 x 10 ⁶	1.3
EFH(01)-240x240T2200	EFH	0.1	0.05	60	3.1	6.8	1.0 x 10 ⁶	1.3

Shielding

Shielding materials


(metal, electrically conductive material)

While transmitted waves can be minimized, most of the incoming waves are reflected, causing internal interference. High-frequency electric current occurs on the metal surfaces and reflected noise occurs at the shielding joints, metal openings, and other parts when the grounding is poor.




Shielding material + radio wave absorber

Shielding material + Radio wave absorber transmitted waves and reflected waves can be minimized by mounting metal plates on the back of radio wave absorbers.



Radio wave absorbers

To prevent reflection, electromagnetic energy is absorbed and converted into heat.

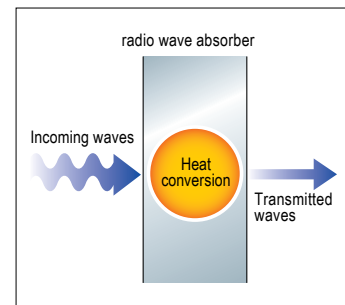


Reference: Other absorbing and reflecting examples

	Absorbing	Reflecting
Radio Waves	Radio waves absorbers	Metals
Light	Black objects	White objects, Mirrors
Sound	Absorbers, Felt	Solid bodies (Concrete, etc.)


Applications

Case 1 – To suppress noise reflected by casing


Case 2 – To suppress cross talk between substrates

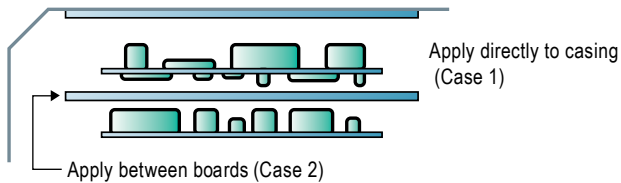


Case 3 – To suppress radiation noises from LSI and IC

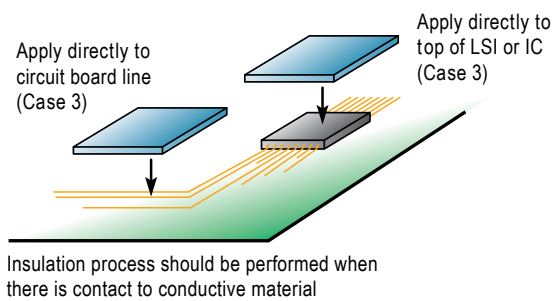

Case 4 – To suppress noise from cables

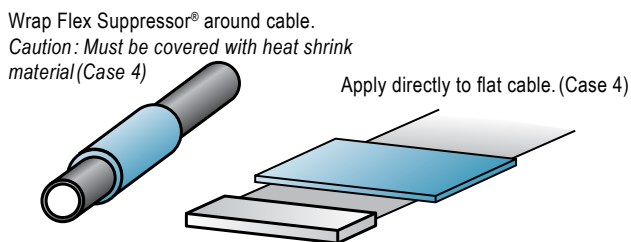


Case 5 – To suppress noise radiation (reflected noise) from the opening of shield, casing, etc.

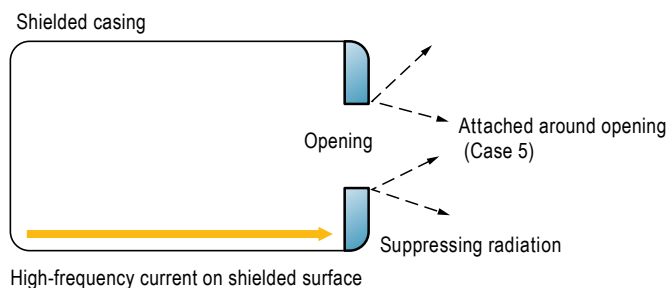


Applications cont'd

Devices	Noise Radiation Suppression	Internal Interference Suppression	RFID Transmission Quality Improvement	Anti-ESD Measure	Anti-SAR Measure
Mobile Phone	On main CPU	On FPC and LSI for LCD module and camera module On main CPU – reception improvement	On loop antenna – Communication distance improvement	On FPC and LSI of LCD module and camera module On metal parts such as chassis	Near antenna Around touch panel
Digital Camera	On CCD module FPD, image processing LSI, and Memory slot On CPU and GPU On cables inside LCD panel On I/O e.g. PCMCIA and memory slot	On the board	—	On the board and FPC On metal parts such as chassis	—
Notebook PC	On CPU and GPU On cables inside LCD panel On I/O e.g. PCMCIA and memory slot	On wireless LAN module	On loop antenna and metal parts near antenna – Communication distance improvement	On CPU and GPU On metal parts such as chassis	—
DVD/BD	On LSI and FPC near optical pickup On MPEG chip	On the board and on FPC	—	On metal parts such as chassis	—
Car Audio & Visual	On LSI, flexible board	On GPS receiver and TV tuner On LSI for LCD – Radio reception improvement	—	On metal parts such as chassis	—
RFID/RW	—	—	On loop antenna, and metal parts near antenna – Communication distance improvement	—	—
Optical Reception Module	—	On the interior of the chassis and on LSI – error rate improvement	—	—	—
Wireless LAN	—	On Cable and co-axial cable – Reception improvement	—	—	—
Scanner	On scanner head board and FPC	—	—	—	—
HDD	On I/F cable	—	—	—	—

Mobile phone

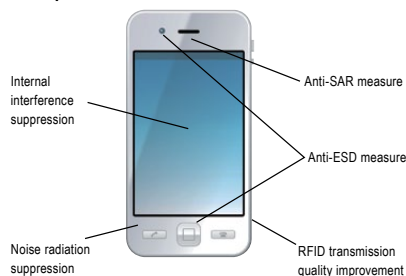


Notebook PC

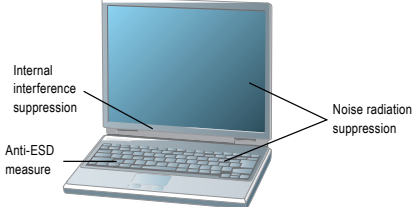


Digital still camera




DVD recorder

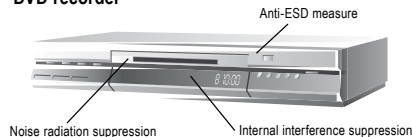

Car navigation system

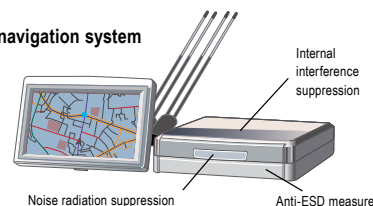


Examples of Shapes




Can be cut in a variety of shapes and sizes.

Permeable Characteristics

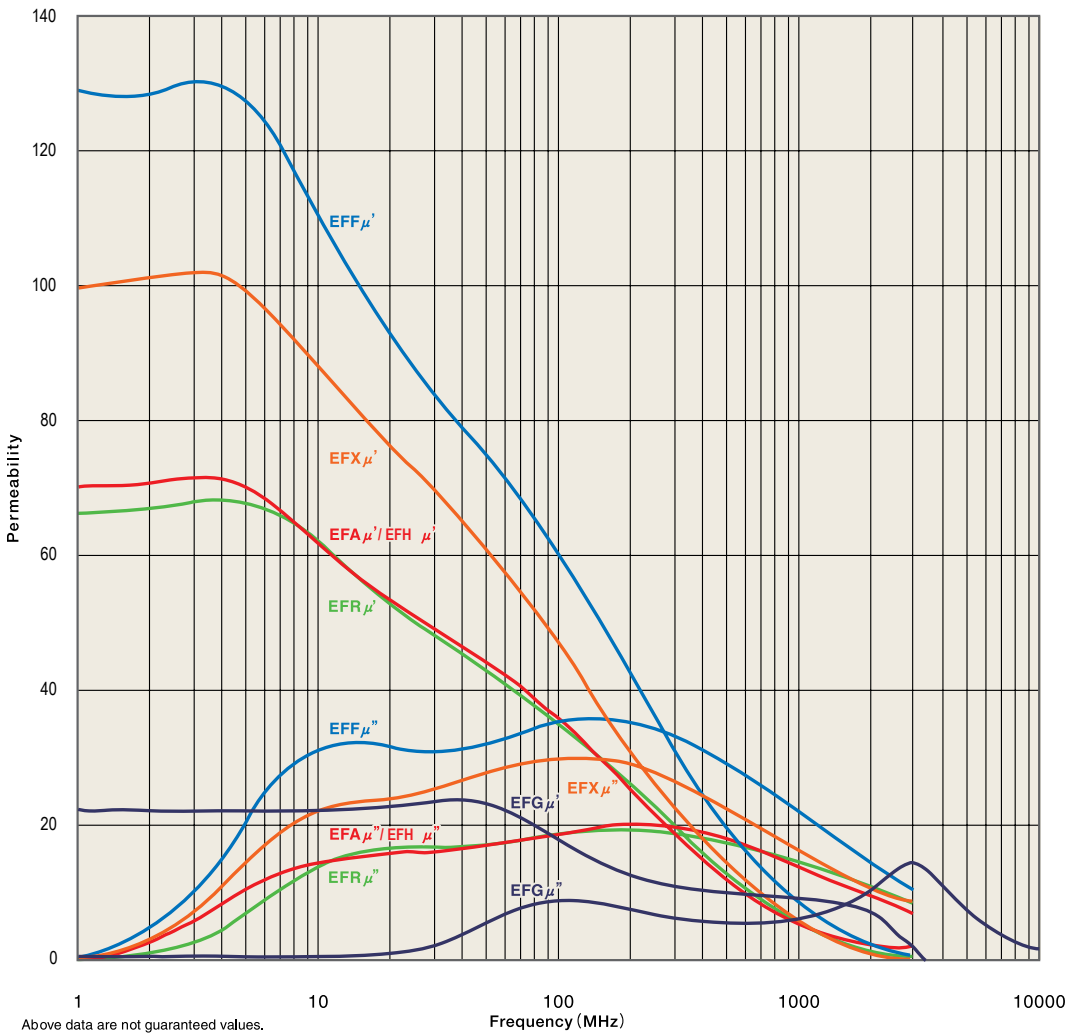


Electrical Characteristics


EFR – Attenuation of transmission noise

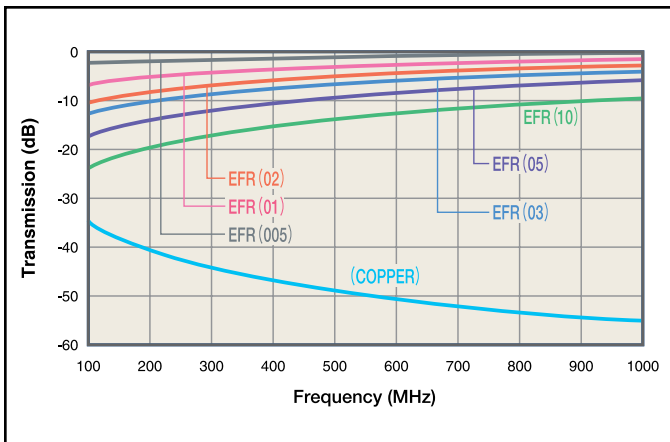


EFR – Attenuation of coupling noise

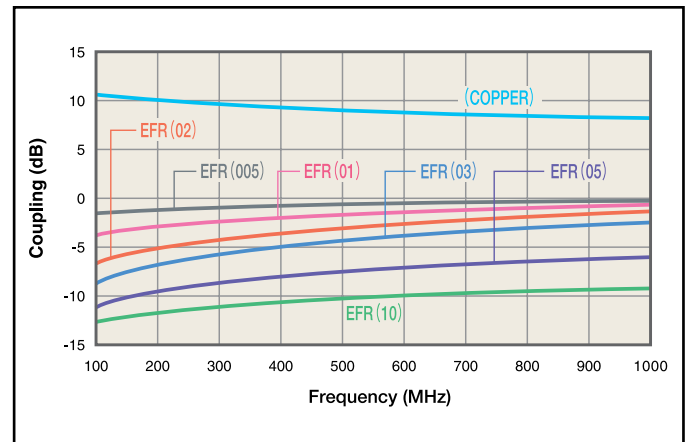


EFX – Attenuation of transmission noise

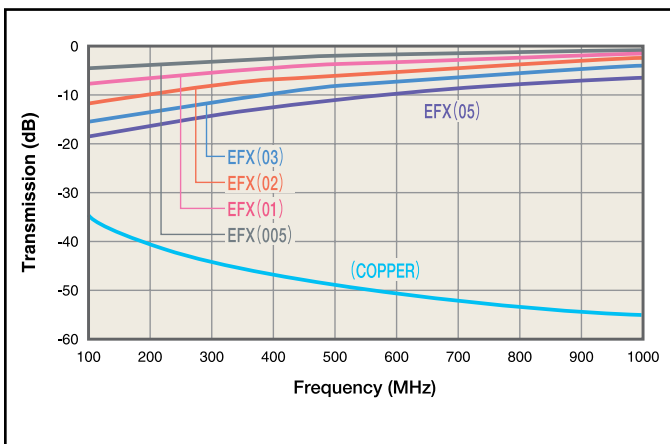


EFX – Attenuation of coupling noise

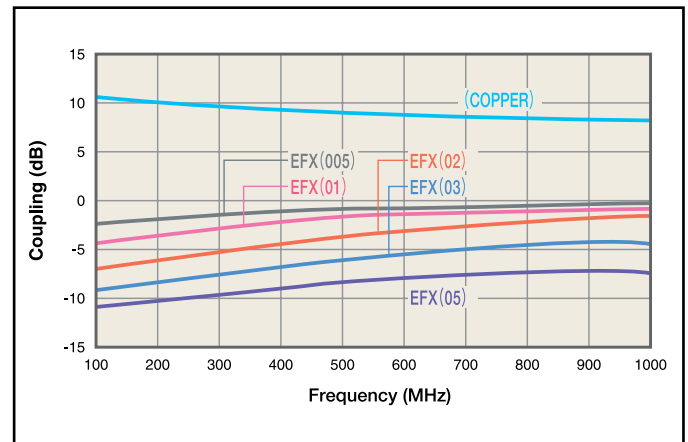

EFF – Attenuation of transmission noise

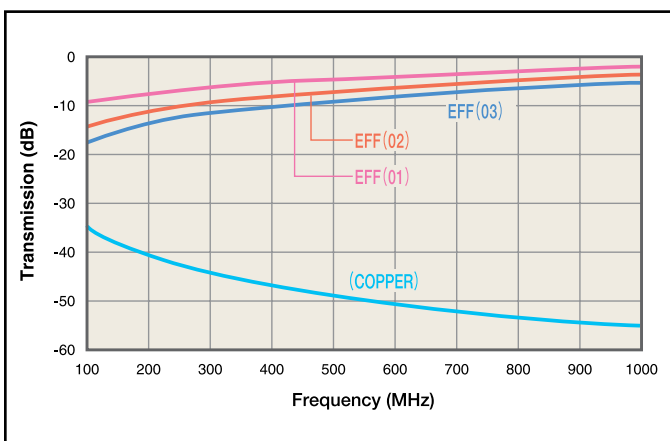


EFF – Attenuation of coupling noise

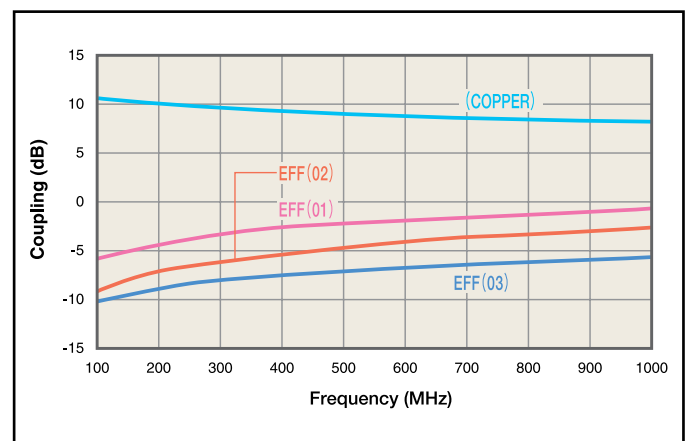


Above data are not guaranteed values.

Electrical Characteristics cont'd


EFA – Attenuation of transmission noise

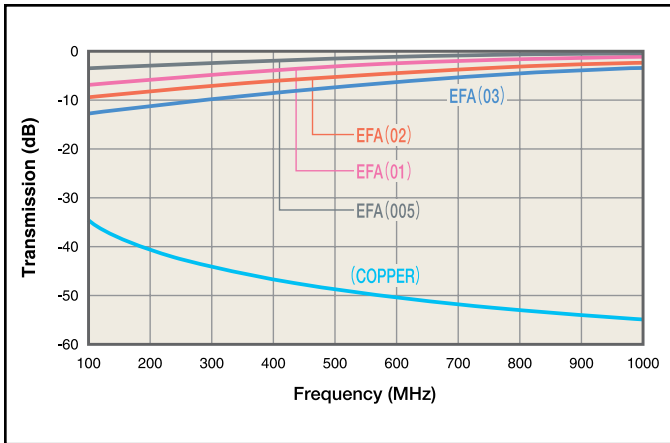


EFA – Attenuation of coupling noise

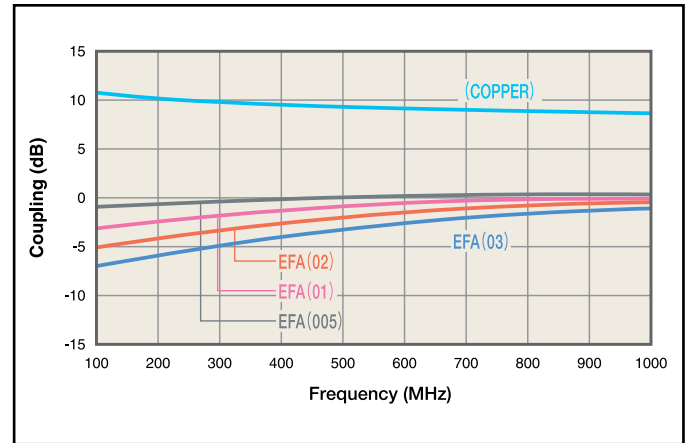

EFH – Attenuation of transmission noise

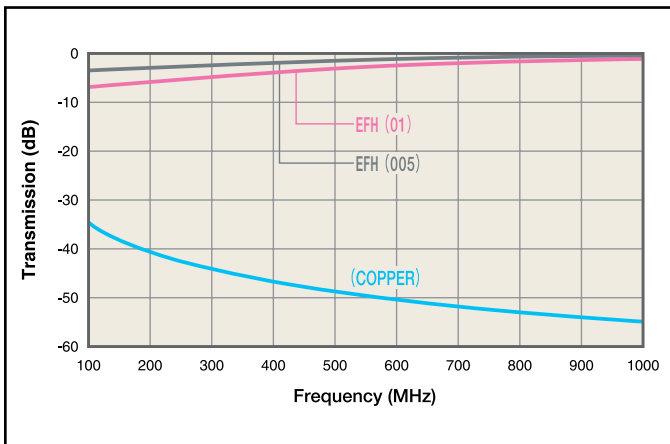


EFH – Attenuation of coupling noise

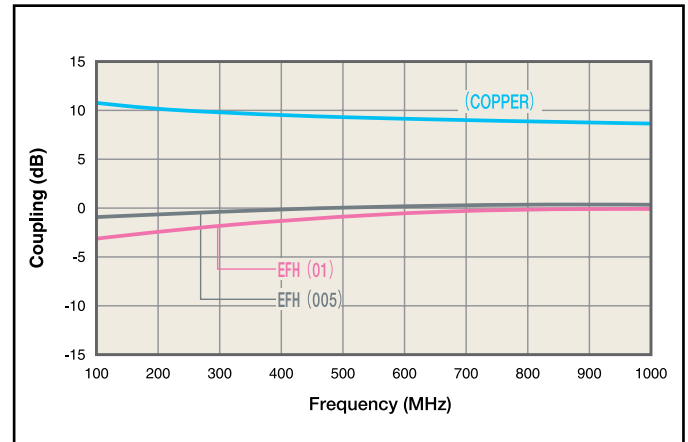


Above data are not guaranteed values.

Measuring Method of Electrical Characteristics

Attenuation of transmission noise




Attenuation of coupling noise




Transmission Noise Attenuation Characteristics

Shown in graphs below are values of transmission loss calculated from the transmission characteristics S11 and S21 measured on $Z_0 = 50\Omega$ type MSL (Micro Strip Line) with a Flex Suppressor® attached.

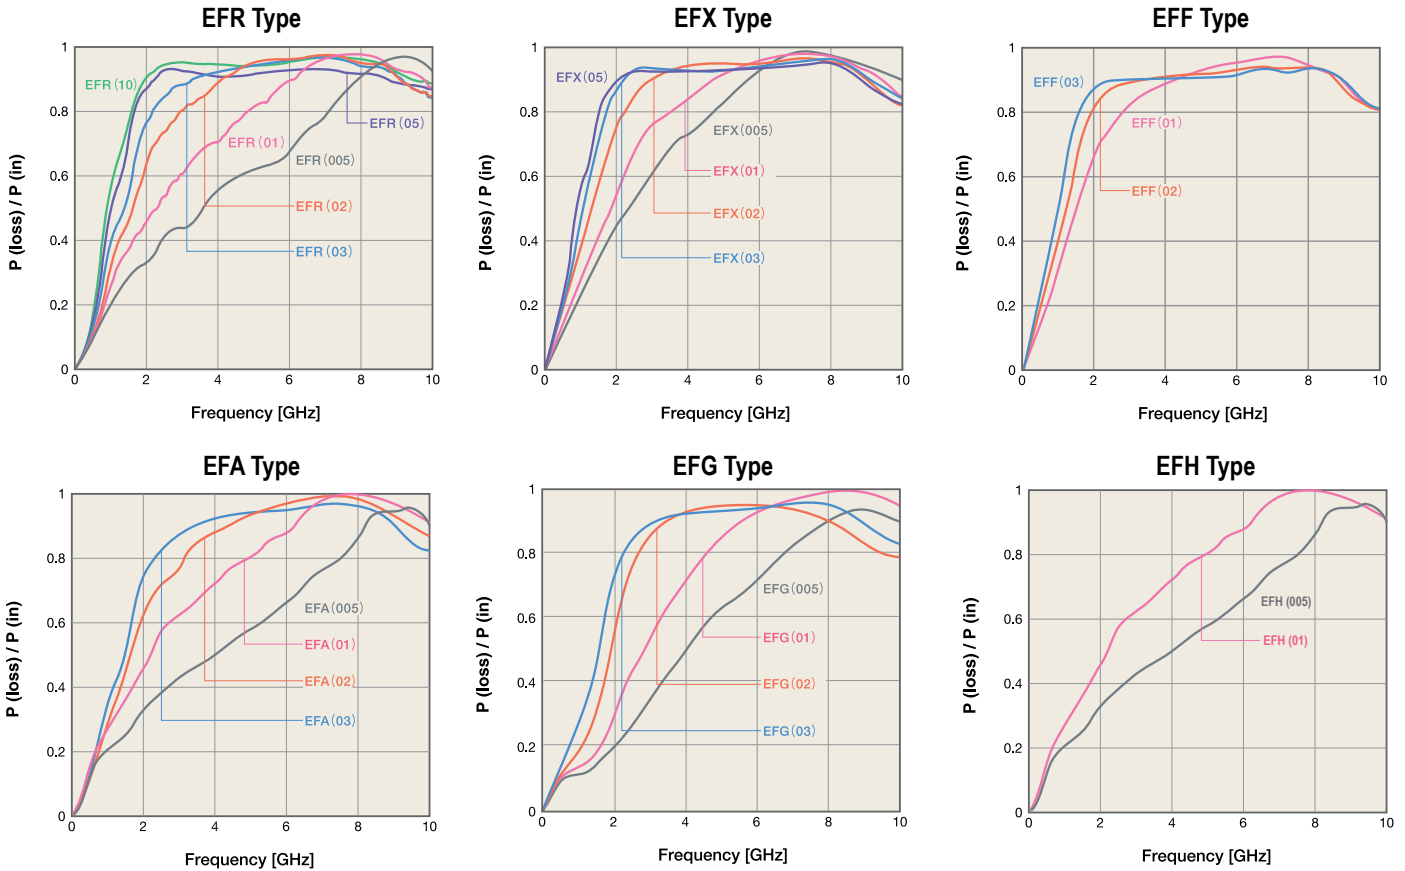


Above data are not guaranteed values.

Measuring Method of Transmission Noise Attenuation Characteristics

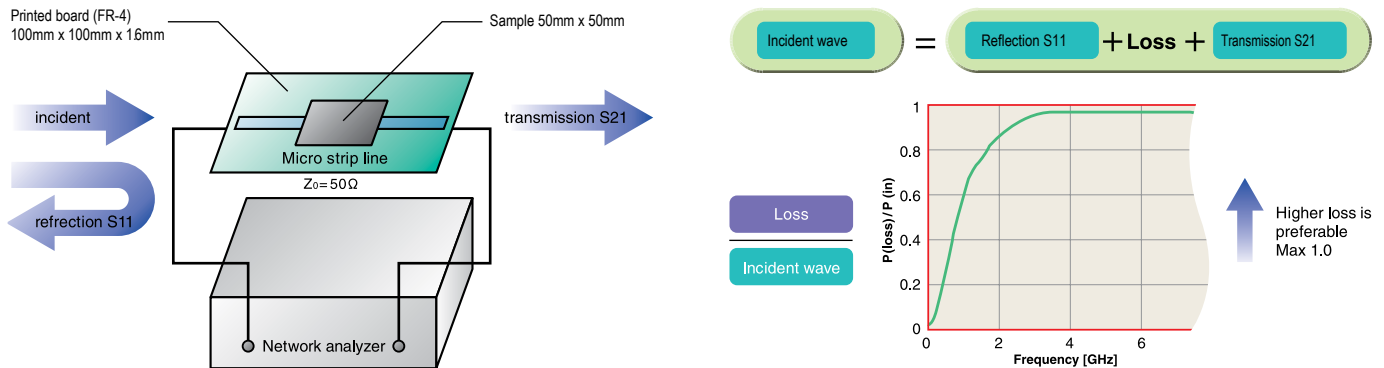

Soldering Process

Reflow Profile

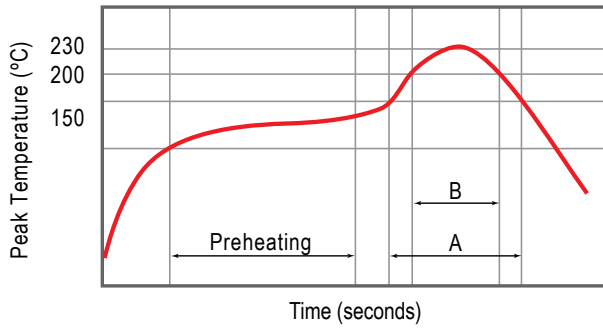

Peak Temperature	+260°C
Preheating	150 – 180°C 90 seconds maximum
A	200°C or more, 60 seconds maximum
B	230°C or more, 40 seconds maximum
Number of Times	2 times maximum

Handling Precautions

Avoid high-temperature, humidity and direct sunlight. Storage environment should be below 40°C and below 70% relative humidity.

The surface resistance value listed in this catalog is a reference value of the circuit parameter to indicate noise suppression. The value does not mean the product's insulation characteristics. The value may become lower if an excess pressure is applied to the product.

Products in this catalog are not insulators. Please handle them as conductors. When in actual use, please be careful so that conductive material does not contact the surface or the edge of the Flex Suppressor® sheet. Insulation process should be performed when contact to conductive material is probable.

Depending upon the processing procedure, powdery substance may drop out from sheet surface or edge if cutting of the sheet is performed by the customer. Please be careful as this powder may effect the component's performance depending on the location.

Clean away any dust, oil or moisture from the surface of the installing area when attaching the sheet using adhesive tape.

Information on environmentally influential substances

The Flex Suppressor® does not contain substances listed below:

(1) Ozone depleting substance

- CFC (chlorofluorocarbon)
- Halon
- Carbon tetrachloride
- 1,1,1-Trichloroethane
- HCFC (hydrochlorofluorocarbon)
- HBFC (hydrobromfluorocarbon)
- Methyl bromide

(2) Substances regulated by RoHS order

- Lead and lead compound
- Mercury and mercury compound
- Cadmium and cadmium compound (content of plastics are below 5ppm)
- Hexavalent chromium and hexavalent chromium compound
- PBB (polybrominated biphenyl) and its kind
- PBDE (polybrominated diphenylether)

(3) Other environmentally influential substances (examples)

- PCB (polychlorinated biphenyl)
- Polychlorinated naphthalene
- Hexachlorobenzene
- Organotin compounds (tributyl tin, triphenyl tin)
- Asbestos
- Azo compound
- Chlorinated paraffin and its kind (paraffin chloride, Chlorinated paraffin and chloroparaffin)
- Radioactive substance
- PVC

KEMET Corporation World Headquarters

2835 KEMET Way
Simpsonville, SC 29681

Mailing Address:
P.O. Box 5928
Greenville, SC 29606

www.kemet.com
Tel: 864-963-6300
Fax: 864-963-6521

Corporate Offices
Fort Lauderdale, FL
Tel: 954-766-2800

North America

Southeast
Lake Mary, FL
Tel: 407-855-8886

Northeast
Wilmington, MA
Tel: 978-658-1663

Central
Novi, MI
Tel: 248-306-9353

West
Milpitas, CA
Tel: 408-433-9950

Mexico
Guadalajara, Jalisco
Tel: 52-33-3123-2141

Europe

Southern Europe
Paris, France
Tel: 33-1-4646-1006

Sasso Marconi, Italy
Tel: 39-051-939111

Central Europe
Landsberg, Germany
Tel: 49-8191-3350800

Kamen, Germany
Tel: 49-2307-438110

Northern Europe
Bishop's Stortford, United Kingdom
Tel: 44-1279-460122

Espoo, Finland
Tel: 358-9-5406-5000

Asia

Northeast Asia
Hong Kong
Tel: 852-2305-1168

Shenzhen, China
Tel: 86-755-2518-1306

Beijing, China
Tel: 86-10-5829-1711

Shanghai, China
Tel: 86-21-6447-0707

Taipei, Taiwan
Tel: 886-2-27528585

Southeast Asia
Singapore
Tel: 65-6586-1900

Penang, Malaysia
Tel: 60-4-6430200

Bangalore, India
Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.

Disclaimer

This product has been made available through a Private Label Agreement and a Development and Cross-Licensing Agreement between KEMET and NEC TOKIN to expand market and product offerings for both companies and their respective customers. For more information, please visit <http://www.kemet.com/nectokin>.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

Flex Suppressor® is a registered trademark of NEC TOKIN Corporation.