


RE01 TEMPERATURE CONTROLLER

FEATURES:


- Control acc. to the PID or ON/OFF algorithm
- Direct co-operation with resistance thermometer or NTC.
- Automatic selection of PID parameters.
- One control relay output and alarm relay.
- Manual control mode.
- One binary input for remote control of control functions.
- **NEW:** Defrost function with programmable automatic or manual mode.

INPUTS:

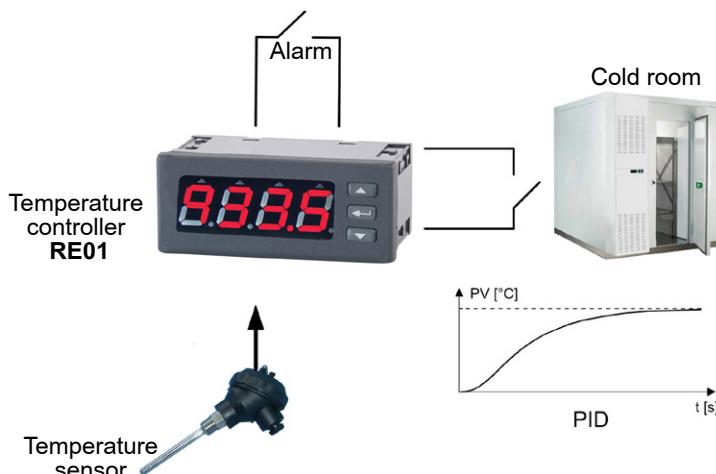
OUTPUTS:

GALVANIC ISOLATION:


Export department:
Tel.: +48 68 45 75 139/233
/321/386

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL

EXAMPLE OF APPLICATION


Automatic control of the cold room using the PID algorithm with autotuning function.

INPUTS

Sensor type	Range [°C]	Basic error [°C]	Remarks	Additional error
Resistance thermometer (acc. EN 60751), measuring current 1 mA				
Pt100	-50...100 0...250 0...600	± 0.8 ± 1.3 ± 3.0	Resistance of the sensor line < 10 Ω; one must connect with wires of the same section and length	
Resistance thermometer (acc. to EN 60751), measuring current 0.1 mA				
Pt1000	-50...100 0...250 0...600	± 0.8 ± 1.3 ± 3.0	Resistance of the sensor line < 10 Ω; one must connect with wires of the same section and length	
NTC 2.7 k	-40...100	± 0.7		
Binary voltage			without isolation from the sensor	

Additional errors in rated operating conditions caused by:
• change of the ambient temperature **≤100% of the basic error/10K**

OUTPUTS

Output kind	Properties	Notes
Voltageless relay	switching contact, overload capacity: 8 A/ 230 V 10 A/250 V a.c., 10 A/30 V d.c.,	
Voltageless relay	NO contact, overload capacity: 5 A/250 V a.c., 5 A/28 V d.c.	minimum of 100 thousand switching cycles for maximum load

PARAMETERS OF WORK

Detection of error in the measurement circuit:	thermocouple Pt100, Pt1000, NTC	overflow of measuring range
Way of output operation	reverse: for heating	direct: for cooling
Signalling:	active output, set point value display, auto-tuning, manual control	

SEE ALSO:

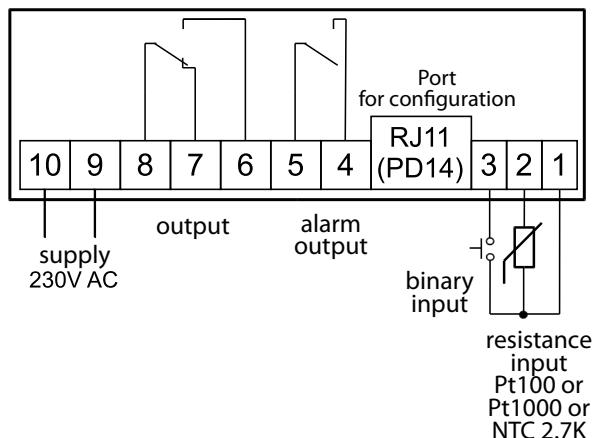


N25T meter for measurement of temperature from resistance thermometers and thermocouples sensors.



Look at our offer of different controllers on our website.

CONNECTION DIAGRAMS



ORDERING

RE01 -	X	X	X
Input:			
Pt100 (-50...100°C) (0...250°C) (0...600°C)	1		
Pt1000 (-50...100°C) (0...250°C) (0...600°C)	2		
NTC (-40...100°C)	3		
Language:			
Polish	P		
English	E		
other*	X		
Acceptance tests:			
without extra requirements	0		
with a extra quality inspection certificate	1		
acc. to customer's request*	X		

* - only after agreeing with the manufacturer

Order example:

The code RE01 - 1 E 0 means:

RE01 - temperature controller of RE01 type
 1 - input: thermocouple Pt100 (-50...100°C)
 (0...250°C) (0...600°C)
 E - English version
 0 - without extra requirements

For more information about LUMEL's products please visit our website: www.lumel.com.pl

Export department:
 Tel.: +48 68 45 75 139/233
 /321/386

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
 ul. Sulechowska 1
 65-022 Zielona Góra
 POLAND
WWW.LUMEL.COM.PL