1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator



Technical Data Sheet

Features:

- Package in 8mm tape on 7"diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- The product itself will remain within RoHS compliant version.

Descriptions:

- The S192 SMD LED is much smaller than lead frame type components, thus enable smaller board size,
 higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

Applications:

- Backlighting in dashboard and switch.
- Telecommunication: Indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Spec No.:S192Date:22-Mar-2017Issue No.:G-Rev-4E-mail:sales@luckylight.cnLuckylight Electronics Co., Ltdhttp://www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 1 / 10


1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator





Technical Data Sheet


Part No.	rt No. Emitting Color Lens Color	
S192BC-B4-1AG	Blue	Water Clear

Package Dimension:










Recommended Soldering Pad Dimensions



Unit: mm Tolerance: ±0.10mm

Notes:

1. All dimensions are in millimeters (inches).

2. Tolerance is \pm 0.25 mm (.010") unless otherwise noted.

Spec No.: S192 Date: 22-Mar-2017

 Issue No.:
 G-Rev-4

 E-mail:
 sales@luckylight.cn

 Luckylight Electronics Co., Ltd
 http://
 www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 2 / 10

1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator



Technical Data Sheet

Absolute Maximum Ratings at Ta=25℃

Symbol	Max	Unit	
Pd	90	mW	
IFP	100	mA	
IF	25	mA	
VR	5	V	
ESD	400	V	
Topr	-40℃ to +80℃		
Tstg	-40°C to +85°C		
Tsld	260°C for 5 Seconds		
	Pd IFP IF VR ESD Topr Tstg	Pd 90 IFP 100 IF 25 VR 5 ESD 400 Topr -40°C to +86 Tstg -40°C to +85	

Notes:

- a. Derate linearly as shown in derating curve.
- b. Duty Factor = 10%, Frequency = 1 kHz

Electrical Optical Characteristics at Ta=25℃

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity ^(a)	IV	80	120		mcd	IF=10mA
		130	200		mcd	IF=20mA
Viewing Angle ^(b)	201/2		130		Deg	IF=20mA
Peak Emission Wavelength	λр		468		nm	IF=20mA
Dominant Wavelength(C)	λd		470		nm	IF=20mA
Spectral Line Half-Width	$\triangle \lambda$		20		nm	IF=20mA
Forward Voltage	VF	2.80	3.20	3.60	V	IF=20mA
Reverse Current	IR			10	μΑ	VR=5V

Notes:

- a. ALuminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- b. $2\theta 1/2$ is the o-axis angle where the luminous intensity is 1/2 the peak intensity
- c. The dominant wavelength (λd) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Spec No.: S192 Date: 22-Mar-2017

 Issue No.:
 G-Rev-4

 E-mail:
 sales@luckylight.cn

 Luckylight Electronics Co., Ltd
 http://
 www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 3 / 10


1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator

300



Technical Data Sheet

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)




500


Wavelength λ p (nm)


700


800


600














Spec No.: S192 Issue No.: G-Rev-4 Luckylight Electronics Co., Ltd

Copyright © 2017 Luckylight All Rights Reserved

4 / 10 Page:

Date:

E-mail:

http://

22-Mar-2017

sales@luckylight.cn


www.luckylight.cn

1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator

Luckylight

Technical Data Sheet

Reel Dimensions:

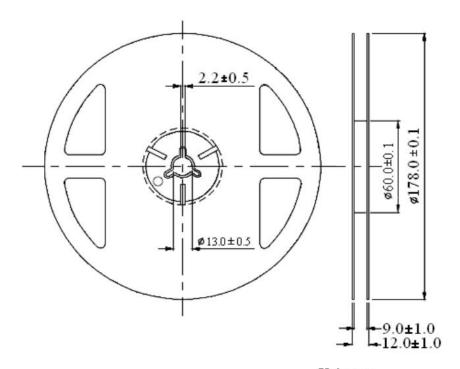


Unit: mm

Tolerance: ± 0.25 mm

Carrier Tape Dimensions:

Loaded quantity 4000 pcs per reel.

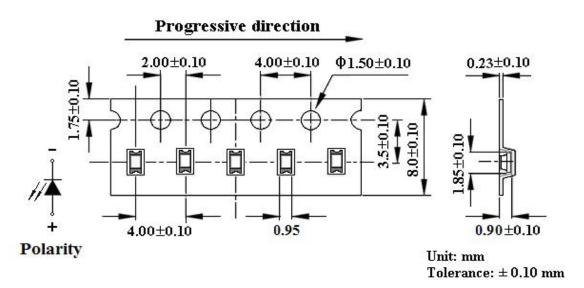

Spec No.: S192 Date: 22-Mar-2017

 Issue No.:
 G-Rev-4

 E-mail:
 sales@luckylight.cn

 Luckylight Electronics Co., Ltd
 http://
 www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 5 / 10


1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator




Technical Data Sheet

Packing & Label Specifications:

Moisture Resistant Packaging:

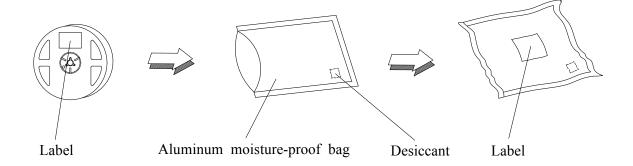

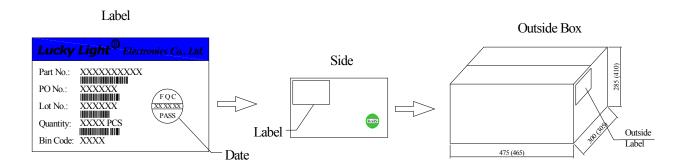

a. 10 reel/Inner Box.

Spec No.:

b. 6 Inner Boxes/Outside Box.

S192

Issue No.: G-Rev-4 Luckylight Electronics Co., Ltd

Copyright © 2017 Luckylight All Rights Reserved

Date: 22-Mar-2017

E-mail: sales@luckylight.cn http:// www.luckylight.cn

Page: 6 / 10

1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator




Technical Data Sheet

CAUTIONS

Handling Precautions:

- 1.1. Handle the component along the side surfaces by using forceps or appropriate tools.
- 1.2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.
- 1.3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.









Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

Storage

- 2.1. Do not open moisture proof bag before the products are ready to use.
- 2.2. Before opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.3. The LEDs should be used within a year.
- 2.4. After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5. The LEDs should be used within 168 hours after opening the package.
- 2.6. If the moisture adsorbent material has fabled away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 65±5°C for 24 hours.

S192 Issue No.: G-Rev-4 Luckylight Electronics Co., Ltd

Spec No.:

Copyright © 2017 Luckylight All Rights Reserved

Date: 22-Mar-2017

sales@luckylight.cn E-mail: http:// www.luckylight.cn

7 / 10 Page:


1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator



Technical Data Sheet

3. Soldering Condition

3.1. Pb-free solder temperature profile

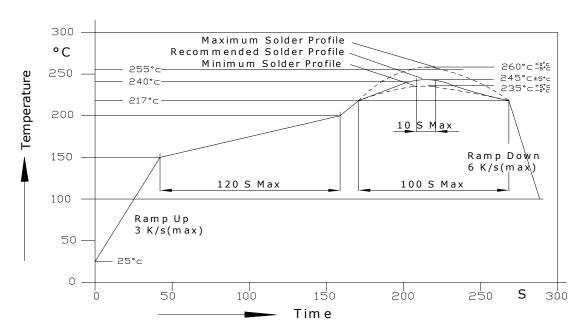

- 3.2. Reflow soldering should not be done more than two times.
- 3.3. When soldering, do not put stress on the LEDs during heating.
- 3.4. After soldering, do not warp the circuit board.
- 3.5. Recommended soldering conditions:

Reflow soldering		Soldering iron		
Pre-heat	150~200°C	Temperature	300°C Max.	
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.	
Peak temperature	260°C Max.		(one time only)	
Soldering time	10 sec. Max.(Max. two times)			

3.6. Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

Spec No.: S192 Date: 22-Mar-2017

Issue No.: G-Rev-4 sales@luckylight.cn E-mail: www.luckylight.cn Luckylight Electronics Co., Ltd http://

8 / 10 Page:

Copyright © 2017 Luckylight All Rights Reserved

1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator




Technical Data Sheet

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

4. Drive Method

4.1. An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

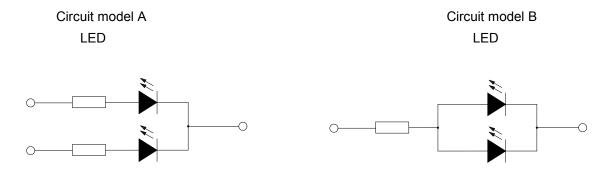

- a. Recommended circuit.
- b. The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

5. ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents. To verify for ESD damage, check for "lightup" and Vf of the suspect LEDs at low currents. The Vf of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AllnGaP product.

Issue No.: G-Rev-4
Luckylight Electronics Co., Ltd

S192

Spec No.:

Copyright © 2017 Luckylight All Rights Reserved

Date: 22-Mar-2017

E-mail: sales@luckylight.cn http:// www.luckylight.cn

Page: 9 / 10

1.6x0.8mm, Blue LED Surface Mount Chip LED Indicator



Technical Data Sheet

Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.

Spec No.: S192 Date: 22-Mar-2017

 Issue No.:
 G-Rev-4

 E-mail:
 sales@luckylight.cn

 Luckylight Electronics Co., Ltd
 http://
 www.luckylight.cn

Copyright © 2017 Luckylight All Rights Reserved Page: 10 / 10