



# Technical Specification Document

---


## C10QM

LTE Cat 1 / 2G Module



# Cavli C-Series C10QM Module

## LTE Cat 1/ 2G Module

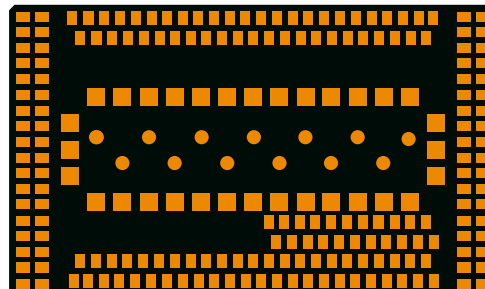

C10QM is the series of LTE Cat 1 modules with 2G fall back supporting 3GPP release 10 designed for IoT and M2M applications. It delivers a maximum data rate of 10 Mbit/s DL & 5 Mbit/s UL. It has a compact LGA form factor which is pin compatible with C10GS LTE Cat 1/4 module which allows flexible migration. C10QM supports integrated GNSS with Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BeiDou/Compass, Galileo and QZSS), for precise and dependable positioning. C10QM supports VoLTE and SMS over IMS/SG/CS and supports wide set Internet protocols and industry-standard interfaces.

They come in 2 variants - C10QM-EA for the Europe and Asia market and C10QM-NA for the North America market. With optional integrated eSIM powered by Cavli Hubble platform, it provides global connectivity that helps to further reduce the time to market. C10QM is ideal for IoT applications such as asset tracking, e-mobility, data loggers, fleet management and environmental monitoring.

## Key features



LTE Cat 1



eSIM



Cavli Hubble Platform



Integrated GNSS



USB 2.0 Interface



2G



Small Form Factor Design



VoLTE Support



SMS over IMS/SG/CS

	C10QM-EA	C10QM-NA
<b>Basic Information</b>		
Region	EMEA, APAC	North America
CPU	ARM Cortex-A7 @ 1.3 GHz	ARM Cortex-A7 @ 1.3 GHz
Memory	256 MB RAM 256/512 MB Flash	256 MB RAM 256/512 MB Flash
OS	Linux 4.14	Linux 4.14
Package	LGA	LGA
Pin Count	233	233
Dimensions	37 x 21.8 x 2.8 mm	37 x 21.8 x 2.8 mm
Weight	TBD	TBD
Operating Temperature	-30 °C to +75 °C	-30 °C to +75 °C
Extended Operating Temperature	-40 °C to +85 °C	-40 °C to +85 °C
<b>Radio Frequency Bands</b>		
RAT	Cat 1   GSM	Cat 1   GSM
Transmission Rates	Cat 1: DL 10 Mbps & UL 5 Mbps GSM (2G): DL 236.8 Kbps & UL 236.8 Kbps	Cat 1: DL 10 Mbps & UL 5 Mbps GSM (2G): DL 236.8 Kbps & UL 236.8 Kbps
LTE Band List   GSM Band List	B1/ B3/ B5/ B8/ B20/ B40   900/ 1800MHz	B2/ B4/ B5/ B12/ B13/ B25/ B26/ B66   900/ 1800MHz
3GPP Release	10	10
<b>GNSS Capability</b>		
GNSS (GNA Variant)	GPS/ GLONASS/ BeiDou/ Galileo SBAS + QZSS Capable	GPS/ GLONASS/ BeiDou/ Galileo SBAS + QZSS Capable
<b>Network Protocols</b>		
Internet Protocols	TCP(S), HTTP(S), MQTT(S), FTP(S), UDP, WS(S), PPP, SNMP	TCP(S), HTTP(S), MQTT(S), FTP(S), UDP, WS(S), PPP, SNMP
<b>Interfaces</b>		
UART	x3	x3
USB 2.0 (HS)	x1	x1
SDIO 3.0	x1	x1
USIM (DSSS) (1.8V / 3.0V)	x1	x1
JTAG	x1	x1
Network Status Indicator	x1	x1
Power ON Status Indicator	x1	x1
SGMII	x1	x1
ADC	x2	x2
I2C <sup>2</sup>	x1	x1

<sup>1</sup>Optional

<sup>2</sup>Needs SDK

<sup>3</sup>In Progress

	C10QM-EA	C10QM-NA
SPI <sup>2</sup>	x1	x1
GPIO <sup>2</sup>	x9	x9
LCD	x1	x1
PCM <sup>2</sup>	x1	x1
Main ANT	x1	x1
GNSS ANT	x1	x1
<b>Electrical Characteristics</b>		
Operating Voltage	Range: 3.6 V to 4.5 V Typical: 3.8 V	Range: 3.6 V to 4.5 V Typical: 3.8 V
TxD Peak	TBD	TBD
TxD Idle	TBD	TBD
GNSS (Fix)	TBD	TBD
<b>Enhanced Features</b>		
VoLTE	Yes	Yes
SMS - IMS	Yes	Yes
SMS - SG	Yes	Yes
SMS - CS	Yes	Yes
<b>Driver Support</b>		
USB Driver	TBD	TBD
<b>Certifications</b>		
Regulatory	Global : GCF <sup>3</sup> Europe : CE <sup>3</sup> UK : UKCA <sup>3</sup> Taiwan : NCC <sup>3</sup> South Korea: KC <sup>3</sup>	Global : GCF <sup>3</sup> North America: PTCRB <sup>3</sup> America : FCC <sup>3</sup> Canada : IC <sup>3</sup>
Carrier	TBD	Verizon <sup>3</sup> /AT&T <sup>3</sup> /TMobile <sup>3</sup>
Others	RoHS / REACH	RoHS / REACH
<b>Other Features</b>		
Integrated GNSS	Optional	Optional
Integrated eSIM + Cavli Hubble Global Connectivity and Device Management Platform	Optional	Optional
miniPCIe Form Factor	Optional	Optional

<sup>1</sup>Optional

<sup>2</sup>Needs SDK

<sup>3</sup>In Progress



# Product Variants

Variant Name	Region	Flash Size	Integrated eSIM
C10QM-EA-22GNN	EMEA, APAC	256 MB	✗
C10QM-EA-22GNH	EMEA, APAC	256 MB	✓
C10QM-NA-22GNN	North America	256 MB	✗
C10QM-NA-22GNH	North America	256 MB	✓
C10QM-EA-24GNN	EMEA, APAC	512 MB	✗
C10QM-EA-24GNH	EMEA, APAC	512 MB	✓
C10QM-NA-24GNN	North America	512 MB	✗
C10QM-NA-24GNH	North America	512 MB	✓

Cavli Inc. All rights reserved. No portions of this document may be reproduced without prior written consent of Cavli Inc. Specifications are subject to change without notice. Cavli, the Cavli logo are trademarks or registered trademarks of Cavli Inc. in the United States and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such.

For more information

Contact : [sales@cavliwireless.com](mailto:sales@cavliwireless.com) | Visit : [www.cavliwireless.com](http://www.cavliwireless.com)

