



Don Addon 43 RGB

General Description

Rev.1.1
2022-01-14

Don Addon 43 RGB applies to below Riverdi HB, IPS 4.3" RGB series:

| PRODUCT NAME | DESCRIPTION |
|-----------------|---|
| RVT43HLTNWN00 | HB, IPS, 4.3", 1000cd/m ² , RGB, No touch panel |
| RVT43HLTFWN00 | HB, IPS, 4.3", 1000cd/m ² , RGB, No touch panel, Metal frame |
| RVT43HLTNWC00-B | HB, IPS, 4.3", 850cd/m ² , RGB, uxTouch, Optical bonding |
| RVT43HLTNWC00 | HB, IPS, 4.3", 800cd/m ² , RGB, uxTouch, Air bonding |
| RVT43HLTNWCA0 | HB, IPS, 4.3", 800cd/m ² , RGB, aTouch, Air bonding |
| RVT43HLTFWCA0 | HB, IPS, 4.3", 800cd/m ² , RGB, aTouch, Air bonding, Metal frame |



1. REVISION RECORD

| REV NO. | REV DATE | CONTENTS | REMARKS |
|---------|------------|-----------------------------|---------|
| 1.0 | 2021-10-25 | Initial Release | |
| 1.1 | 2022-01-14 | Updating the product photos | |



1. Contents

- 1. REVISION RECORD..... 2
- 2. INTRODUCTION..... 4
- 3. GENERAL DESCRIPTION 4
- 4. MODULE DRAWING 5
- 5. MECHANICAL FUNCTIONS..... 6
- 6. ELECTRICAL FUNCTIONS..... 8
- 7. HOW TO USE..... 8
- 8. SUMMARY 8
- 9. LEGAL INFORMATION..... 9



2. INTRODUCTION

The aim of this document is to present the general idea and functions of the device presented. Don Addon 43 RGB is a hardware connection between Riverdi STM32 Evaluation Board and the TFT display, turning three separate items into one working unit.

3. GENERAL DESCRIPTION


This Don Addon board is the hardware interfacing device that provides the necessary connection between TFT and Riverdi STM32 Evaluation Board.

Because of the rich offer of TFT modules from Riverdi and the necessity to ensure seamless cooperation between different TFT modules and ONE type of Riverdi STM32 Evaluation Board, there must be different, customized versions of Don Addons, to make it possible to use many modules differing in size, signal connectors and mechanical builds, together with ONE universal controller – Riverdi STM32 Evaluation Board.



One of the purposes for building Don Addons was to put developers' world in order.

Another one was to prepare and demonstrate the working TFT modules at various presentations and exhibitions.

| | | |
|-----------|--------------|------------|
| Revision: | Changes: | Date: |
| 1.0 | Initial Case | 2021.11.09 |

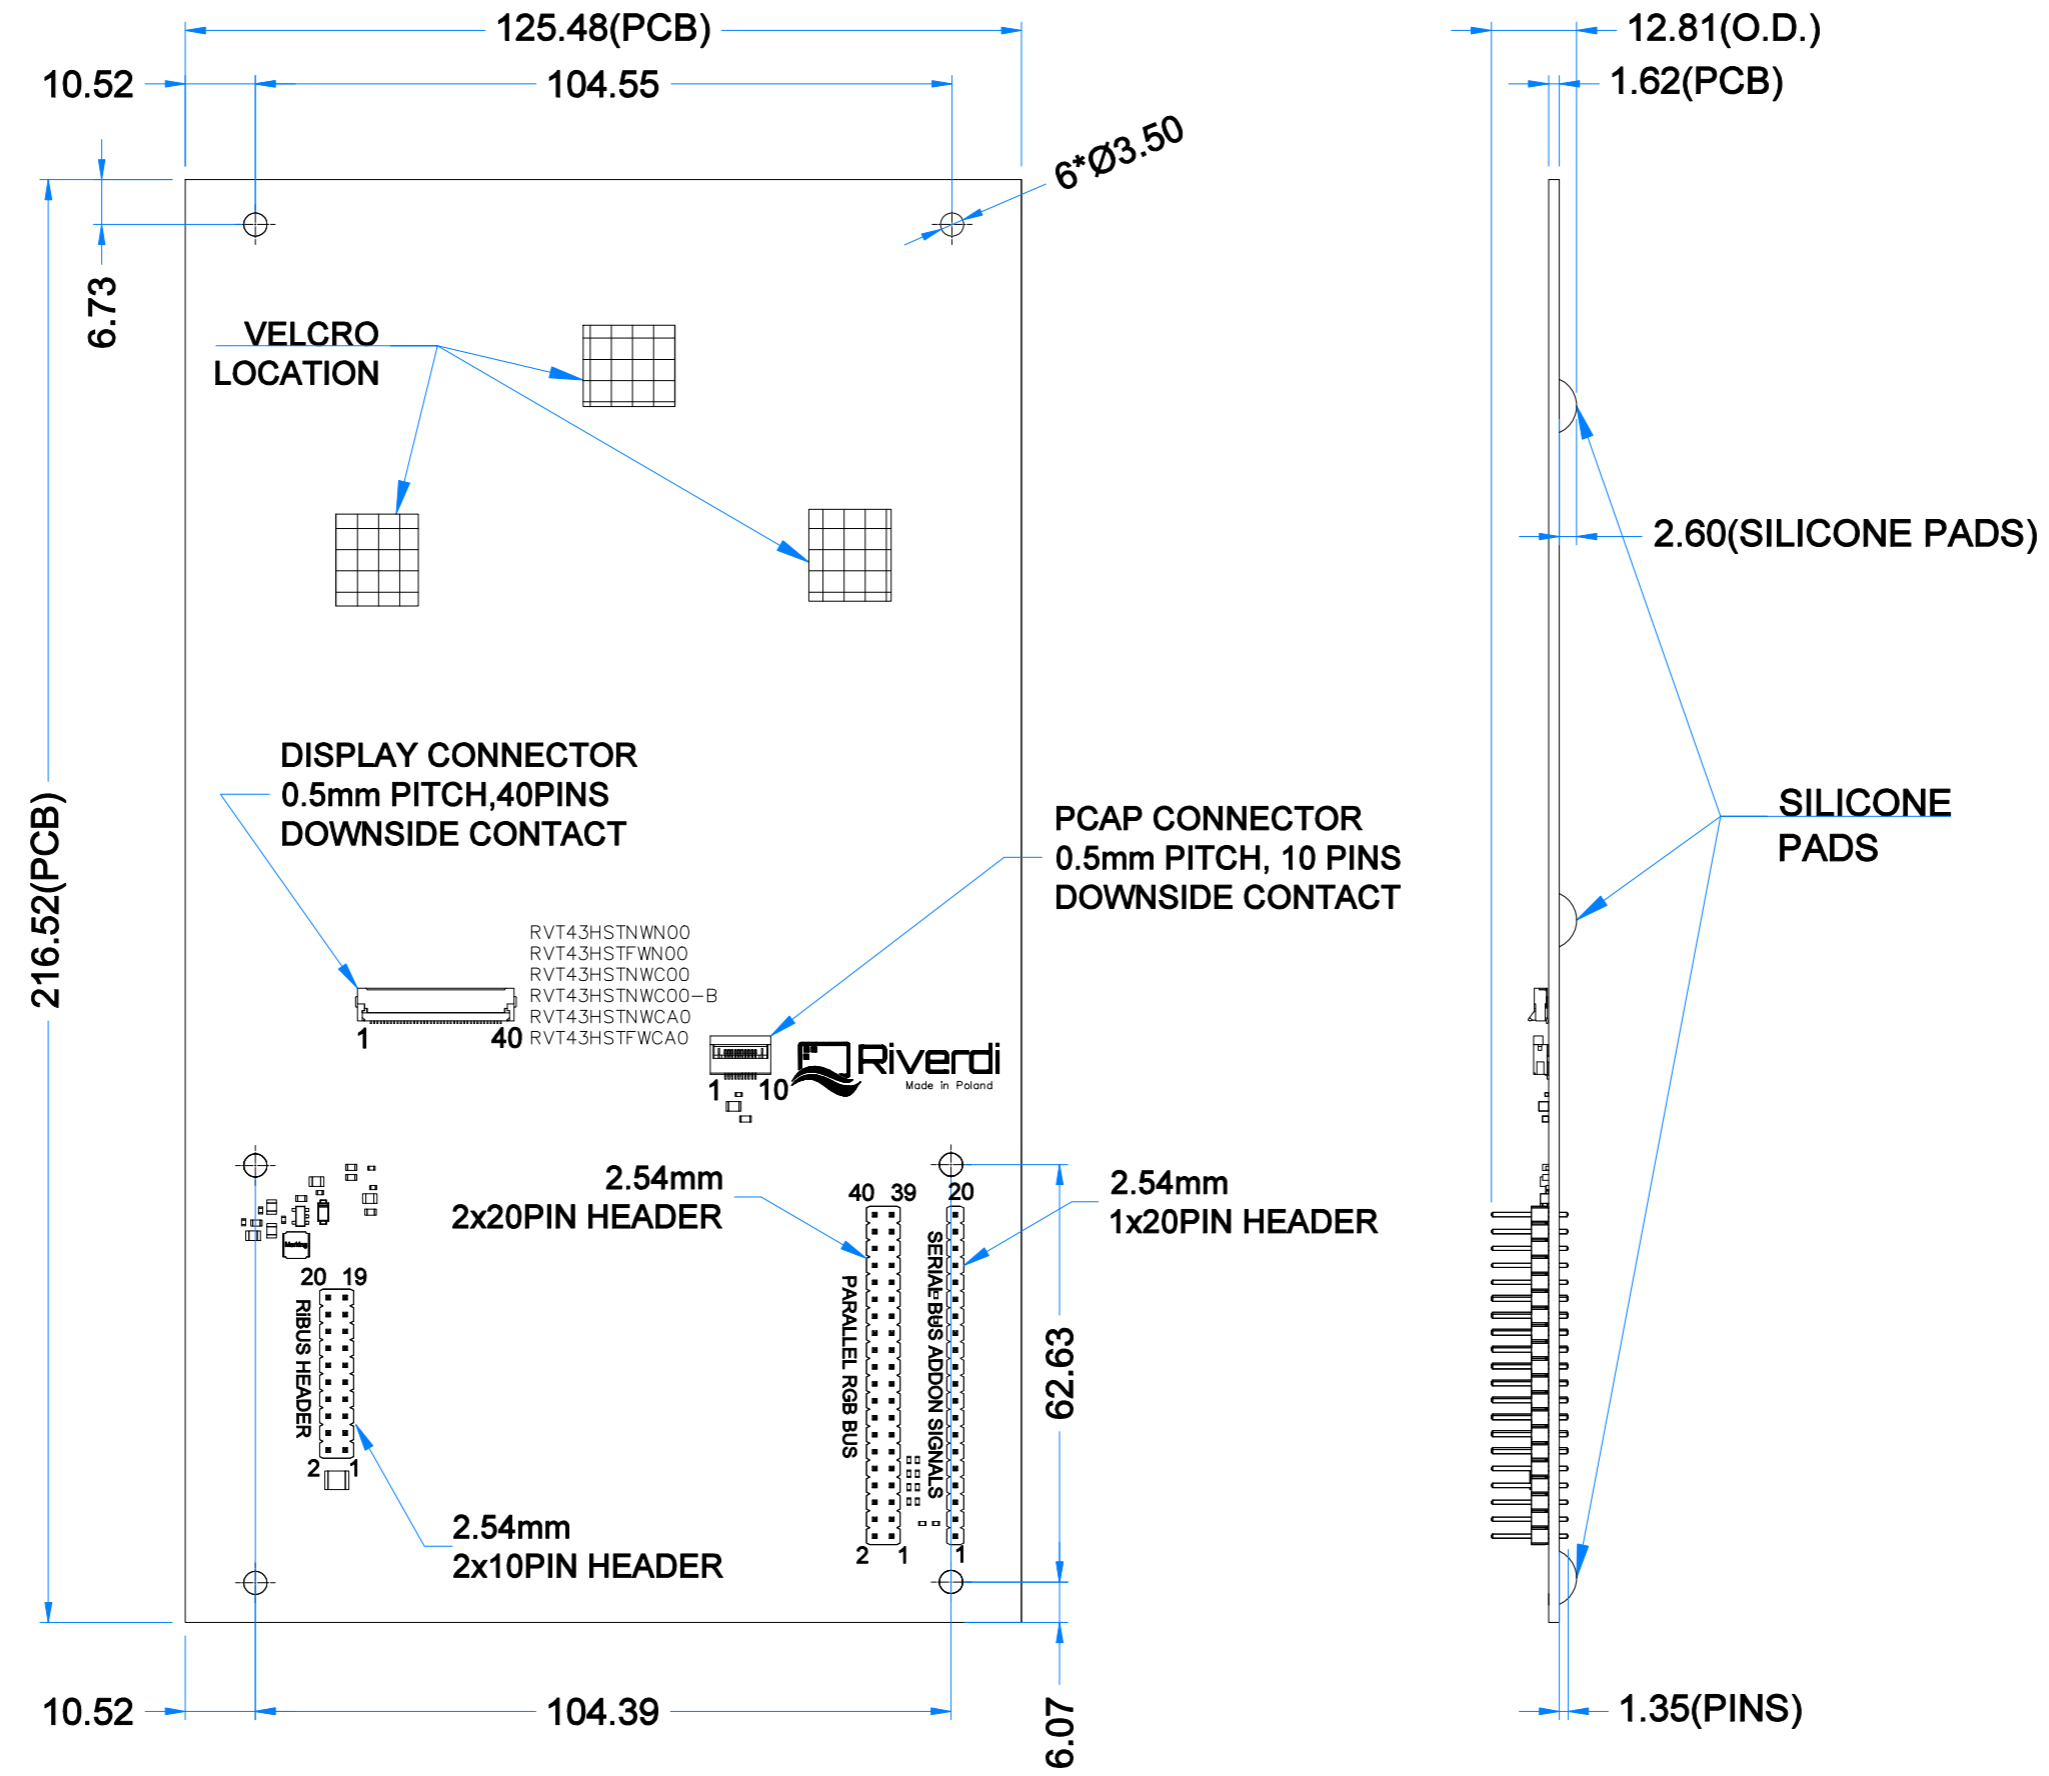

GENERAL NOTES:
 1. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm
 2. RoHS3 COMPLIANT

| | | | |
|------------------------------|------------|---|---|
| PN: DON ADDON 43 RGB Rev.1.0 | |  | |
| SN: | | | |
| DRAWN: M.Natywa | 2021.11.09 | 1:1.13 |  |
| CHECKED: | | [mm] | |
| APPR: | | ISO A3 | |
| | | | P. 1 of 1 |



5. MECHANICAL FUNCTIONS

1. The add-on board is a stable mechanical base for three components:
 - Riverdi STM32 Evaluation Board
 - [Riverdi HB, IPS 4.3" RGB TFT display](#)
 - Don Addon 43 RGB

Mechanical stability of the above devices fixed together protects delicate TFT connectors against breaking, tearing off and wearing out due to frequent connecting and disconnecting.

2. The Don Addon board is designed in a way that allows the use of all three components in horizontal and vertical positions.


The horizontal position is particularly useful during development. It gives a secure access to STM32 Evaluation Board measuring terminals and other circuitry points desired by a developer.

The vertical position allows for hanging the entire working unit on a vertical post for exhibiting purposes and for drawing visitors' attention.


A TFT module is fastened to the Don Addon board with velcro tapes in 3 places. Using velcro tapes between the Don Addon board and the TFT ensures:

- Relatively high fastening strength that makes sure the TFT connectors are safe from mechanical damage in both positions (horizontal and vertical),
- Relative ease of changing the TFT modules whenever necessary.

The picture below shows all three listed components separately, before being assembled into one unit:

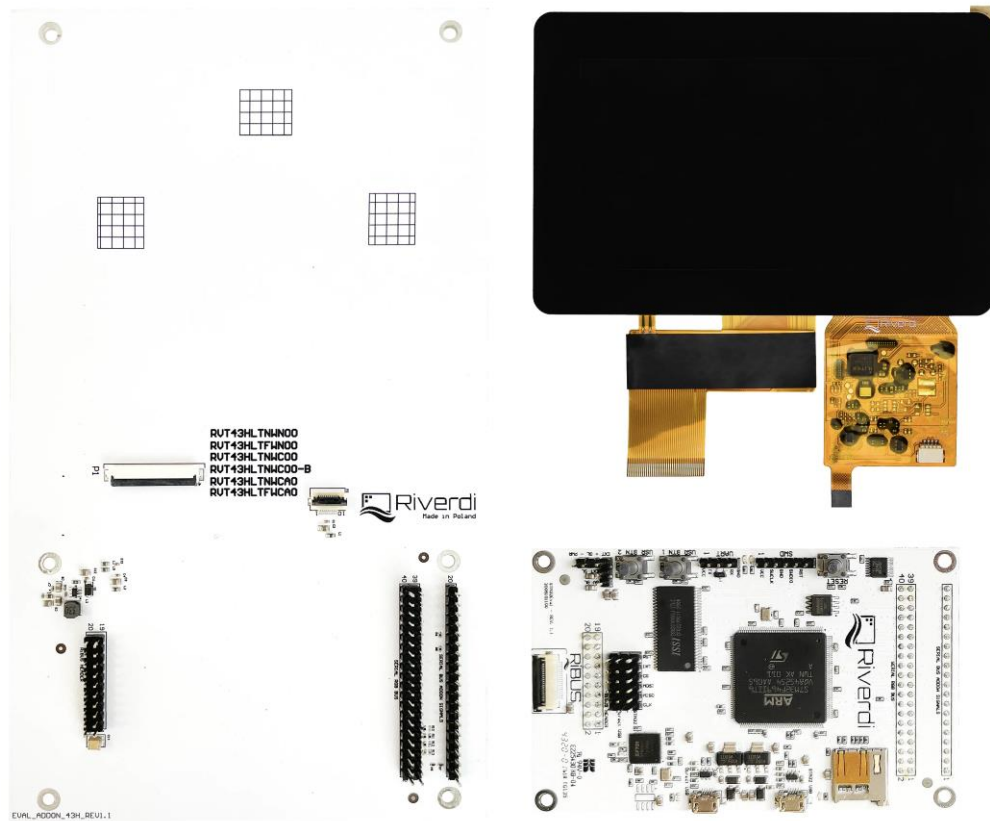

The picture below shows the same three components assembled and connected into one device:

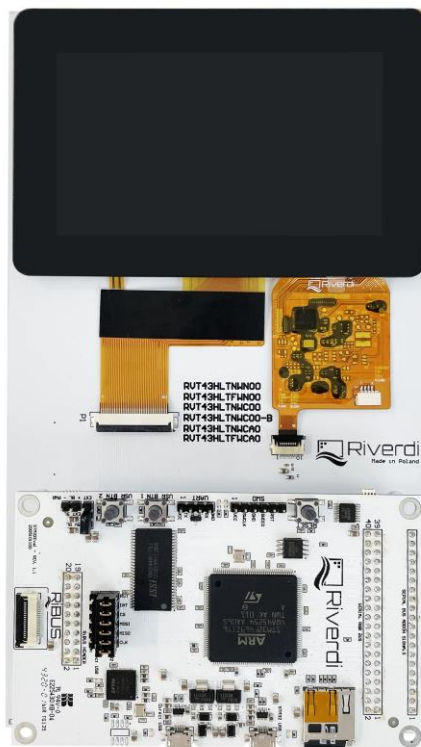



6. ELECTRICAL FUNCTIONS

1. The Don Addon board generates all the voltages necessary for the TFT display to operate properly.
2. The Don Addon board generates the power necessary for backlight in the TFT module to operate properly.

7. HOW TO USE

Please refer to the User Manual of the STM32 Evaluation board on how to use the assembled unit.

User Manual Download Link: <https://riverdi.com/product/stm32-evaluation-board/>

8. SUMMARY

If this document has made you interested in knowing more about Riverdi products, please visit Riverdi website: <https://riverdi.com/>



9. LEGAL INFORMATION

This document has been issued for informational purposes only. It can be updated or altered without any written notice. Riverdi cannot be held responsible for not announcing any changes or issuing next revisions or versions of this document.

Hi, I am here to help you!
If you have any additional
questions, please contact
our support via email:
contact@riverdi.com

