


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

Dept								
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/04/23'		

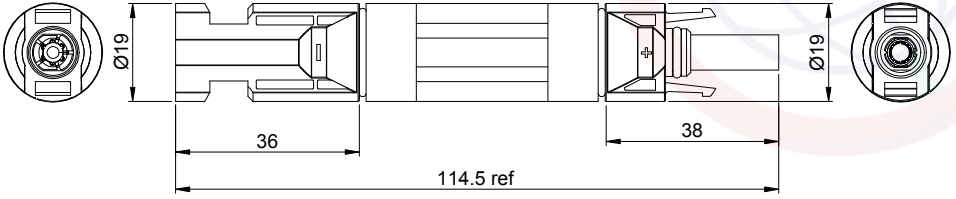

(Series Image-Reference Only)

- Notes:**
- Specifications:**
- Contact Resistance: 0.5mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 6000V AC(rms) For 1 Minute.
 - Current Rating: 10-30A.
 - Voltage Rating: 1000V DC rms.
 - Temperature: -40°C~+85°C.
 - Waterproof rated: IP65.

- Materials:**
- Insulating material: Thermoplastic,Black.
 - Contact: Red Copper,Tin plated.
 - Fingers: Beryllium Copper, Tin Plated.
 - Clip: Stainless Steel.
 - Sealing: Silicone rubber,Black&Red.

Product Number Code:
 DS1162-23 - X X X X X

- Voltage Type
 10: 10A 15: 15A
 20: 20A 25: 25A
 30: 30A
- Packing Type
 P: Polybag
- Housing color
 B: Black
- Contact plating
 6: Tin
- Mounting type
 A: Adaptor

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Photovoltaic Secondary Tube Connector
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1162-23 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1162-23-XXXXX-A					

1 2 3 4 5 6 7 8