

# FT 25-RH

Photoelectric diffuse sensor with background suppression






## PRODUCT HIGHLIGHTS

- Precisely adjustable background suppression
- Reliable switching despite varying object colors and surfaces
- Reliable operation even with highly reflective backgrounds, thanks to SensoPart ASIC technology
- Simple alignment thanks to easily visible light spot
- Sensor setting via teach-in and control input
- Robust glass-fibre-reinforced plastic housings

Optical data		Functions	
Scanning distance	1 ... 200 mm <sup>1</sup>	Indicator LED, green	Operating voltage indicator
Adjustment range	10 ... 200 mm <sup>1</sup>	Indicator LED, yellow	Switching output indicator
Type of light	LED, red, 632 nm	Scanning distance adjustment	Via Teach-in button, control input <sup>3</sup> and IO-Link
Light spot size	See diagram	Teach-in modes	Mode 1: during running process Mode 2: during standing process
		Adjustment possibilities	N.O./N.C. and Auto-Detect / NPN / PNP via teach-in button, control input <sup>3</sup> and IO-Link Button lock via control input <sup>3</sup> and IO-Link Wide variety of adjustment possibilities via IO-Link
		Default settings	Max. scanning distance and N.O.
Electrical data		Mechanical data	
Operating voltage, +U <sub>B</sub>	10 ... 30V DC <sup>2</sup>	Dimensions	34 x 20 x 12 mm
No-load current, I <sub>0</sub>	≤ 30 mA	Enclosure rating	IP 69 & IP 67 <sup>5</sup>
Output current, I <sub>e</sub>	≤ 100 mA	Material, housing	ABS
Protective circuits	Reverse-polarity protection, U <sub>B</sub> / short-circuit protection (Q)	Material, front screen	PMMA
Protection Class	2	Type of connection	See selection table
Power On Delay	< 300 ms	Ambient temperature: operation	-20 ... +60 °C <sup>6</sup>
Switching output, Q	1x Auto-Detect (PNP/NPN) <sup>4</sup>	Ambient temperature: storage	-20 ... +80 °C
Output function	N.O./N.C.	Weight (plug device)	10 g
Switching frequency, f (ti/tp 1:1)	≤ 1000 Hz	Weight (metal plug device <sup>7</sup> )	10 g
Response time	500 μs	Weight (cable device)	40 g
Control input, IN <sup>3</sup>	+U <sub>B</sub> = teach-in -U <sub>B</sub> = button locked Open = normal operation	Weight (pigtail)	20 g
		Vibration and impact resistance	EN 60947-5-2
IO-Link			
Communication mode	COM 2		
Min. cycletime	2.3 ms		
SIO mode	Compatible		
Length process data	16 Bit		
Specification	1.1		

<sup>1</sup> Reference material: white, 90 % reflectivity    <sup>2</sup> Max. 10 % ripple, within U<sub>B</sub>, ~ 50 Hz / 100 Hz    <sup>3</sup> Only 4-pin design    <sup>4</sup> Auto-Detect, automatic PNP/NPN selection by the sensor; PNP or NPN fixed    <sup>5</sup> With connected IP 67 / IP 69 plug    <sup>6</sup> UL: -20 ... +50 °C    <sup>7</sup> No Ecolab

Scanning distance	Switching output	Type of connection	Part number	Article number
1 ... 200 mm	Auto-Detect	Plug, M8x1, 3-pin, IO-Link	FT 25-RH-PNSL-M3	608-11054
1 ... 200 mm	Auto-Detect	Metal plug, M8x1, 3-pin, IO-Link	FT 25-RH-PNSL-M3M	608-11055
1 ... 200 mm	Auto-Detect	Plug, M8x1, 4-pin, IO-Link	FT 25-RH-PNSL-M4	608-11051
1 ... 200 mm	Auto-Detect	Metal plug, M8x1, 4-pin, IO-Link	FT 25-RH-PNSL-M4M	608-11053
1 ... 200 mm	Auto-Detect	Cable, 2 m, 4-wire, IO-Link	FT 25-RH-PNSL-K4	608-11052
1 ... 200 mm	Auto-Detect	Pigtail, 150 mm with plug, M8, 4-pin, IO-Link	FT 25-RH-PNSL-KM4	608-11057
1 ... 200 mm	Auto-Detect	Pigtail, 150 mm with plug, M12 4-pin, IO-Link	FT 25-RH-PNSL-KL4	608-11056

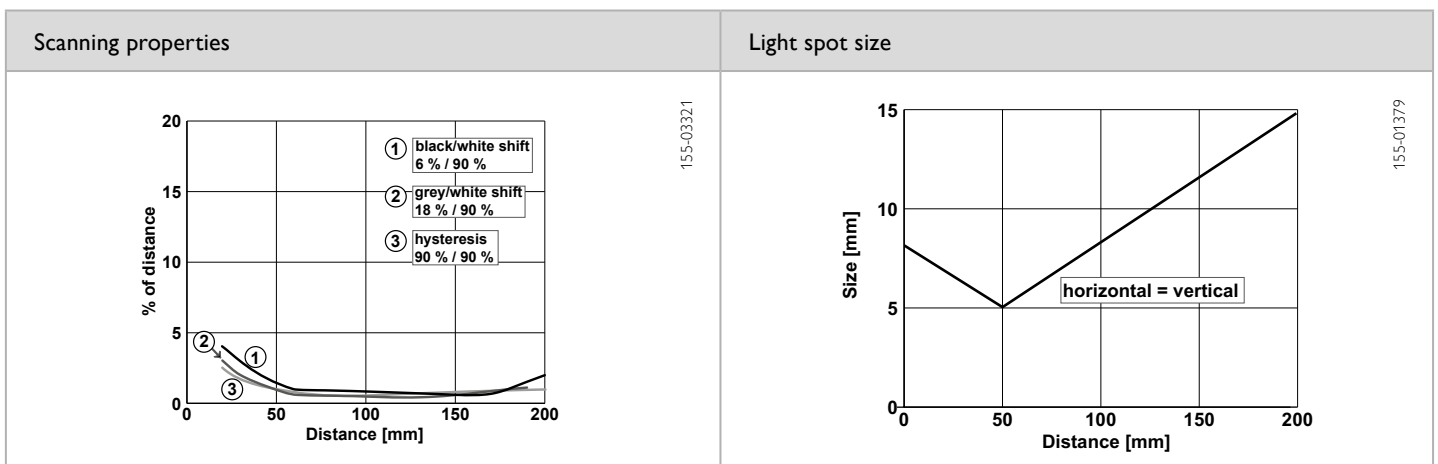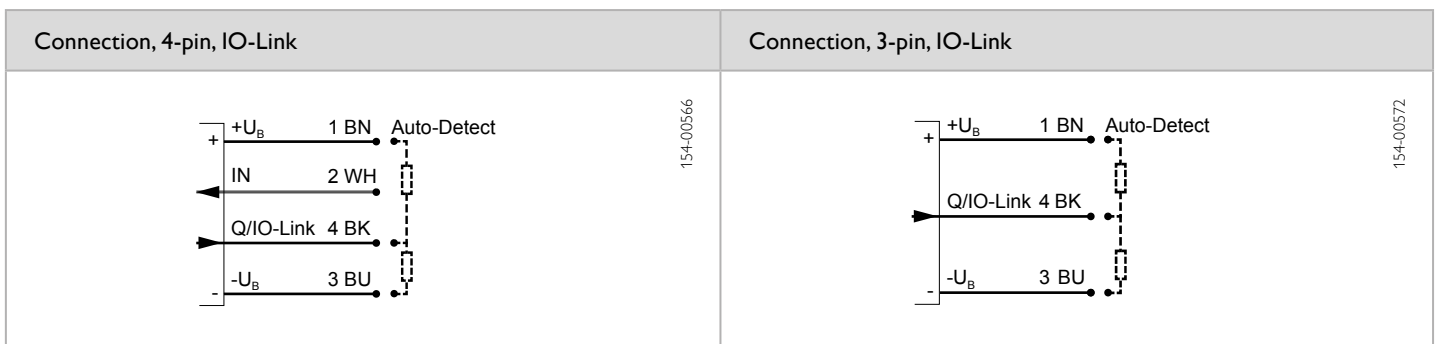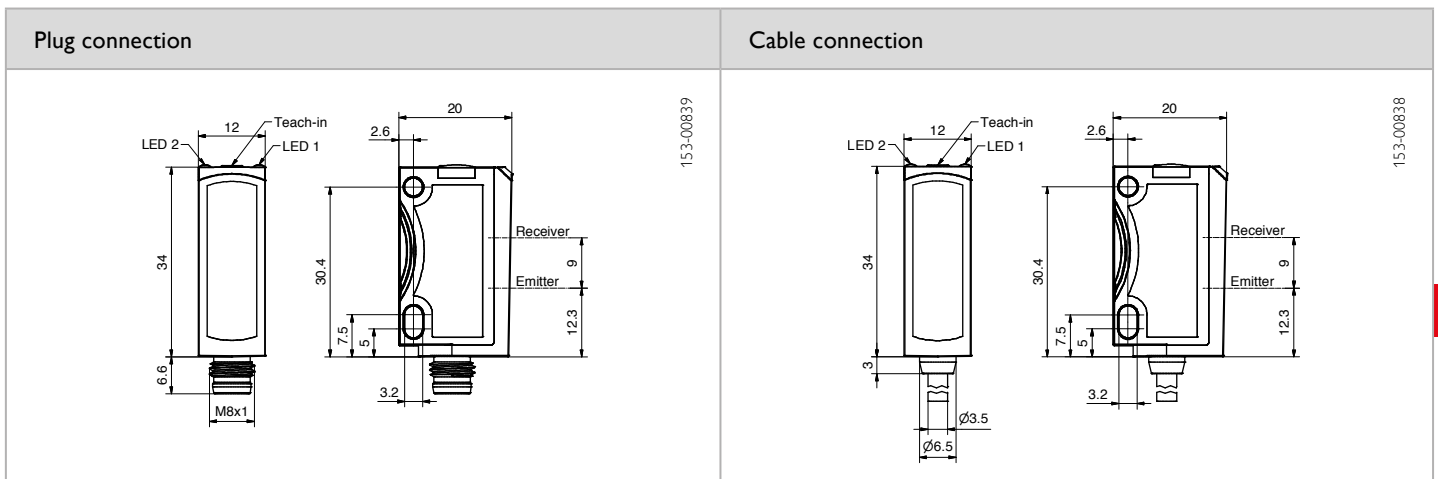

Reference material	Detection range	Accessories
White (90 %)	1 ... 200 mm	Connection cables
Grey (18 %)	2 ... 200 mm	Brackets
Black (6 %)	4 ... 190 mm	SensolO (901-01000)
		From Page A-46
		From Page A-4
		From Page A-56