


MKP-15

METALLIZED POLYPROPYLENE CAPACITOR

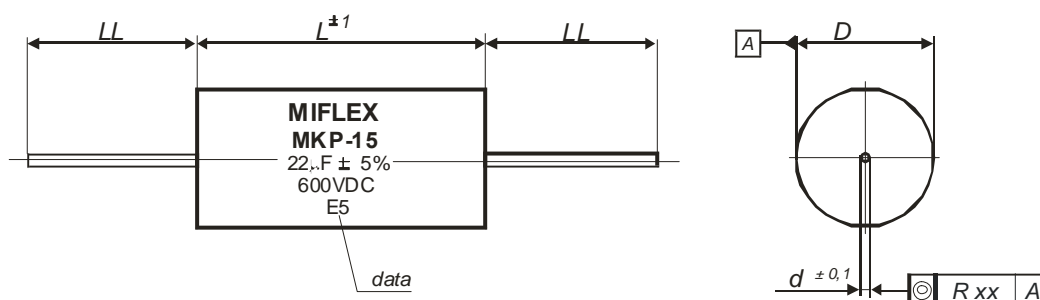

APPLICATION

The MKP-15 metallized polypropylene capacitors are designed for use in d.c. circuits of up to their respective rated voltage U_r within the temperature range of the specified climatic category.

CONSTRUCTION

Non-inductive metallized polypropylene winding encapsulated in self-extinguishing material meeting the requirements of UL 94 V-0.

REQUIREMENTS

The MKP-15 capacitors meet the requirements of EN 60384-13 standard.

TECHNICAL DATA

- Rated voltage – according to table
- Dissipation factor
 - $\leq 0,0050$ at $f = 10$ kHz for $C_R = 0,22 \mu\text{F}$
 - $\leq 0,0020$ at $f = 1$ kHz for $0,22 \mu\text{F} < C_R \leq 10 \mu\text{F}$
 - $\leq 0,0030$ at $f = 1$ kHz for $C_R > 10 \mu\text{F}$
- Insulation resistance
 - $\geq 30\,000 \text{ M}\Omega$ for $C_R \leq 0,33 \mu\text{F}$
 - $\geq 10\,000 \text{ M}\Omega \times \mu\text{F}$ for $C_R > 0,33 \mu\text{F}$
- Dielectric strength – $2 \times U_r / 2s$
- Climatic category – 25/085/21/C

Capacitor type	Rated capacitance	Rated voltage (U_r)	Dimensions				
			D_{max}	$L_{\pm 1,0}$	$d_{\pm 0,1}$	LL_{min}	xx
–	μF	VDC	mm	mm	mm	mm	mm
MKP-15	15,0	400	29,5	44,0	1,0	50	3,0
	0,22	600	12,0	20,0	0,8		1,5
	2,2		22,0	31,0			1,0
	10		36,0	44,0			
	22		43,5	60,0			
			36,0	84,0			
	47		43,5	110,0			

MIFLEX S.A.

ZAKŁADY PODZESPOŁÓW RADIOWYCH
 99-300 KUTNO, UL. GRUNWALDZKA 3, POLAND
 Tel.: (48) (24) 355 11 00
 Fax: (48) (24) 355 11 88
 E-mail: miflex@miflex.com.pl

page 1
 pages 1

Revision date: 09.07.2015