


SPECIFICATIONS

| | | |
|-------------------------------|---|---------------------------|
| CUSTOMER | : | PTC |
| SAMPLE CODE | : | SH480272T009-IBA |
| MASS PRODUCTION CODE | : | PH480272T009-IBA |
| SAMPLE VERSION | : | 01 |
| SPECIFICATIONS EDITION | : | 003 |
| DRAWING NO. (Ver.) | : | JLMD-PH480272T009-IBA_002 |
| PACKAGING NO. (Ver.) | : | JPKG-PH480272T009-IBA_001 |

Customer Approved

Date:



| Approved | Checked | Designer |
|----------|---------|----------|
| 閔偉 | 劉進 | 楊威 |

- Preliminary specification for design input
- Specification for sample approval

POWERTIP TECH. CORP.

| | | |
|--|---|--|
| <p>Headquarters: No.8, 6th Road, Taichung Industrial Park, Taichung, Taiwan 台中市 407 工業區六路 8 號</p> | <p>TEL: 886-4-2355-8168 FAX: 886-4-2355-8166</p> | <p>E-mail: sales@powertip.com.tw Http://www.powertip.com.tw</p> |
|--|---|--|

Contents

1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics

2. MODULE STRUCTURE

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
- 2.3 Timing Characteristics

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

4. RELIABILITY TEST

- 4.1 Reliability Test Condition

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

Appendix : 1.LCM Drawing
2.Packaging

Note: For detailed information please refer to IC data sheet:ILITEK--- ILI6480B

1.1 Features

| Item | Standard Value |
|---------------------|---|
| Display Type | 480 * 3 (RGB) * 272 Dots |
| LCD Type | Normally white TN , Transmissive Type |
| Screen size(inch) | 4.3"(Diagonal) |
| Viewing Direction | 6 O'clock |
| Color configuration | R,G, B vertical stripe |
| Display Interface | Digital 24-bits RGB |
| Driver IC | ILI6480B |
| ROHS | THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer website : http://www.powertip.com.tw/news.php?area_id_view=1085560481/ |

1.2 Mechanical Specifications

| Item | Standard Value | Unit |
|-------------------|------------------------------|------|
| Outline Dimension | 105.5(W) x 67.2 (L) x 3.6(H) | mm |

LCD panel

| Item | Standard Value | Unit |
|--------------|------------------------|------|
| Viewing Area | 98.7 (W) * 57.5 (L) | mm |
| Active Area | 95.04 (W) x 53.856 (L) | mm |
| Pixel Size | 0.198 (W) * 0.198 (H) | mm |

Note : For detailed information please refer to LCM drawing

1.3 Absolute Maximum Ratings

Module

| Item | Symbol | Condition | Min. | Max. | Unit |
|-----------------------------|-----------------|------------------------|------|------|------|
| System Power Supply Voltage | VDD | GND=0 | -0.5 | +5.0 | V |
| Operating Temperature | T _{OP} | - | -20 | +70 | °C |
| Storage Temperature | T _{ST} | - | -30 | +80 | °C |
| Storage Humidity | H _D | T _a ≤ 60 °C | 10 | 90 | %RH |

1.4 DC Electrical Characteristics

Module

GND = 0V, T_a = 25°C

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------|-----------------|-------------|---------|------|----------|------|
| Power supply | VDD | - | 3.0 | 3.3 | 3.6 | V |
| | VGH | - | - | 15 | - | V |
| | VGL | - | - | -10 | - | V |
| "H" Input Voltage | V _{IH} | - | 0.7*VDD | - | VDD | V |
| "L" Input Voltage | V _{IL} | - | GND | - | 0.3* GND | V |
| "H" Output Voltage | V _{OH} | - | VDD-0.4 | - | VDD | V |
| "L" Output Voltage | V _{OL} | - | GND | - | GND +0.4 | V |
| Supply Current | IDD | VDD=3.3V *1 | - | 20 | 30 | mA |

Note1: Maximum current display.

1.5 Optical Characteristics

TFT LCD Panel

VDD =3.3V, Ta=25°C

| Item | Symbol | Condition | Min. | Typ. | Max. | unit | | |
|---|------------|------------|--------------|------|------|-------------------|-------|-------|
| Response time | Tr + Tf | - | - | 30 | 45 | ms | Note2 | |
| Viewing angle | Top | $\theta+$ | CR \geq 10 | - | 60 | - | Deg. | Note4 |
| | Bottom | $\theta-$ | | - | 60 | - | | |
| | Left | θ_L | | - | 60 | - | | |
| | Right | θ_R | | - | 60 | - | | |
| Contrast ratio | CR | | 500 | 600 | - | - | - | |
| Color of CIE Coordinate | White | X | IF= 20 mA | 0.26 | 0.31 | 0.36 | - | Note1 |
| | | Y | | 0.28 | 0.33 | 0.38 | | |
| | Red | X | | 0.52 | 0.57 | 0.62 | | |
| | | Y | | 0.28 | 0.33 | 0.38 | | |
| | Green | X | | 0.29 | 0.34 | 0.39 | | |
| | | Y | | 0.56 | 0.61 | 0.66 | | |
| | Blue | X | | 0.10 | 0.15 | 0.20 | | |
| | | Y | | 0.02 | 0.07 | 0.12 | | |
| Average Brightness Pattern=white display | IV | IF= 20 mA | 500 | 550 | - | cd/m ² | Note1 | |
| Uniformity | ΔB | IF= 20 mA | 70 | - | - | % | Note1 | |

Note1:

1 : $\Delta B = B(\min) / B(\max) \times 100\%$



2 : Measurement Condition for Optical Characteristics:

a : Environment: 25°C \pm 5°C / 60 \pm 20%R.H , no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 \pm 50 mm , ($\theta = 0^\circ$)

c : Equipment: TOPCON BM-7 fast , (field 1°) , after 10 minutes operation.


d : The uncertainty of the C.I.E coordinate measurement ± 0.01 , Average Brightness $\pm 4\%$

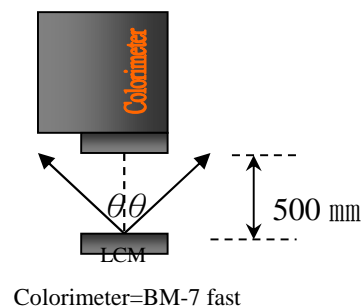

Note2: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

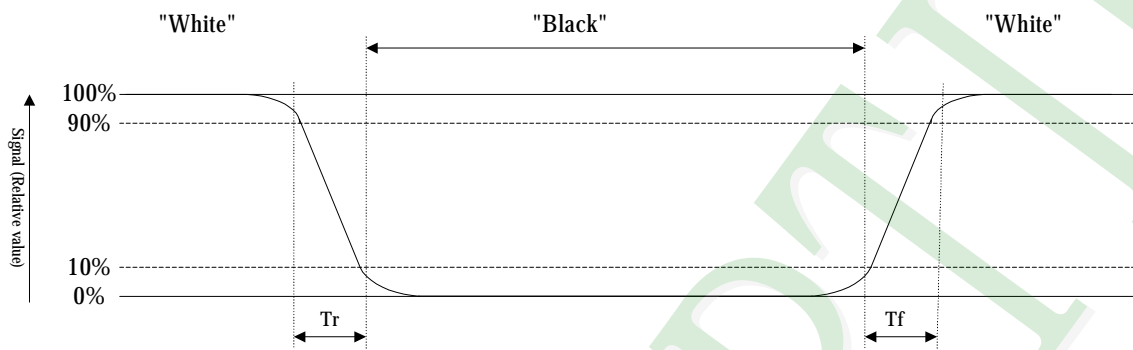


Note3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note4: Definition of viewing angle:

Refer to figure as below:

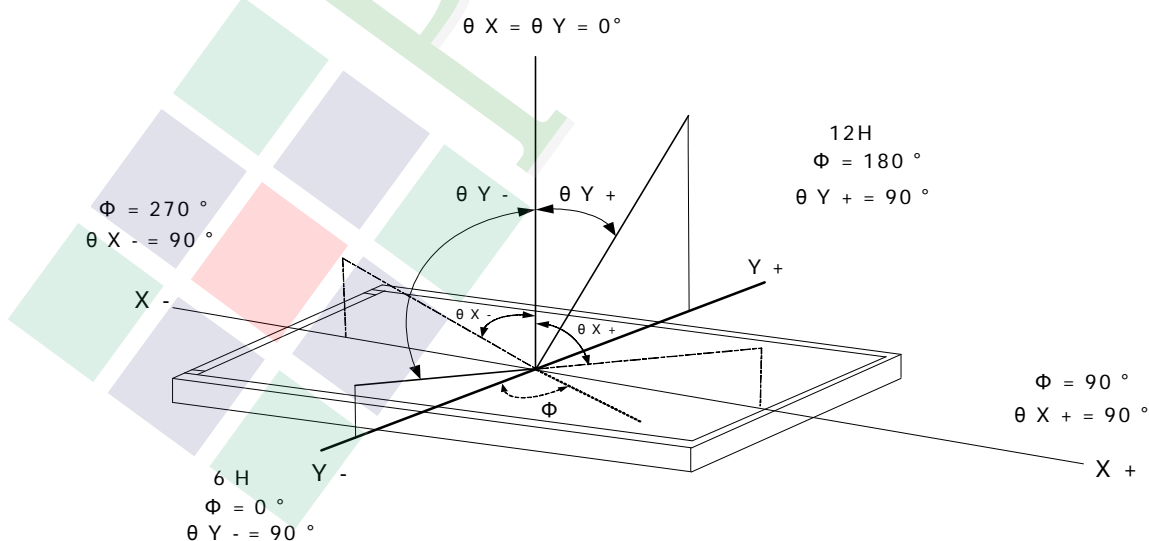

1.6 Backlight Characteristics

Maximum Ratings

| Item | Symbol | Conditions | Min. | Max. | Unit |
|-----------------------------------|--------|------------|------|------|------|
| LED Forward Current (Each LED) | IF | Ta =25°C | - | 30 | mA |
| LED Reverse Voltage (Each LED) | VR | Ta =25°C | - | 5.0 | V |
| Power Dissipation | PD | Ta =25°C | - | 508 | mW |

Electrical / Optical Characteristics

| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|--------|------------|------|------|------|-------------------|
| Forward Voltage | VF | IF=20mA | - | 22.8 | 24.5 | V |
| Average Brightness (Without LCD) | IV | | 6000 | 7200 | - | cd/m ² |
| CIE Color Coordinate (Without LCD) | X | | 0.26 | 0.30 | 0.33 | - |
| | Y | | 0.26 | 0.30 | 0.33 | |
| Color | White | | | | | |

Internal Circuit Diagram



Other Description

| Item | Conditions | Description |
|-----------|----------------------|-------------|
| Life Time | Ta =25°C IF= 20mA | 20000 hrs |


2. MODULE STRUCTURE

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix

2.1.2 Block Diagram

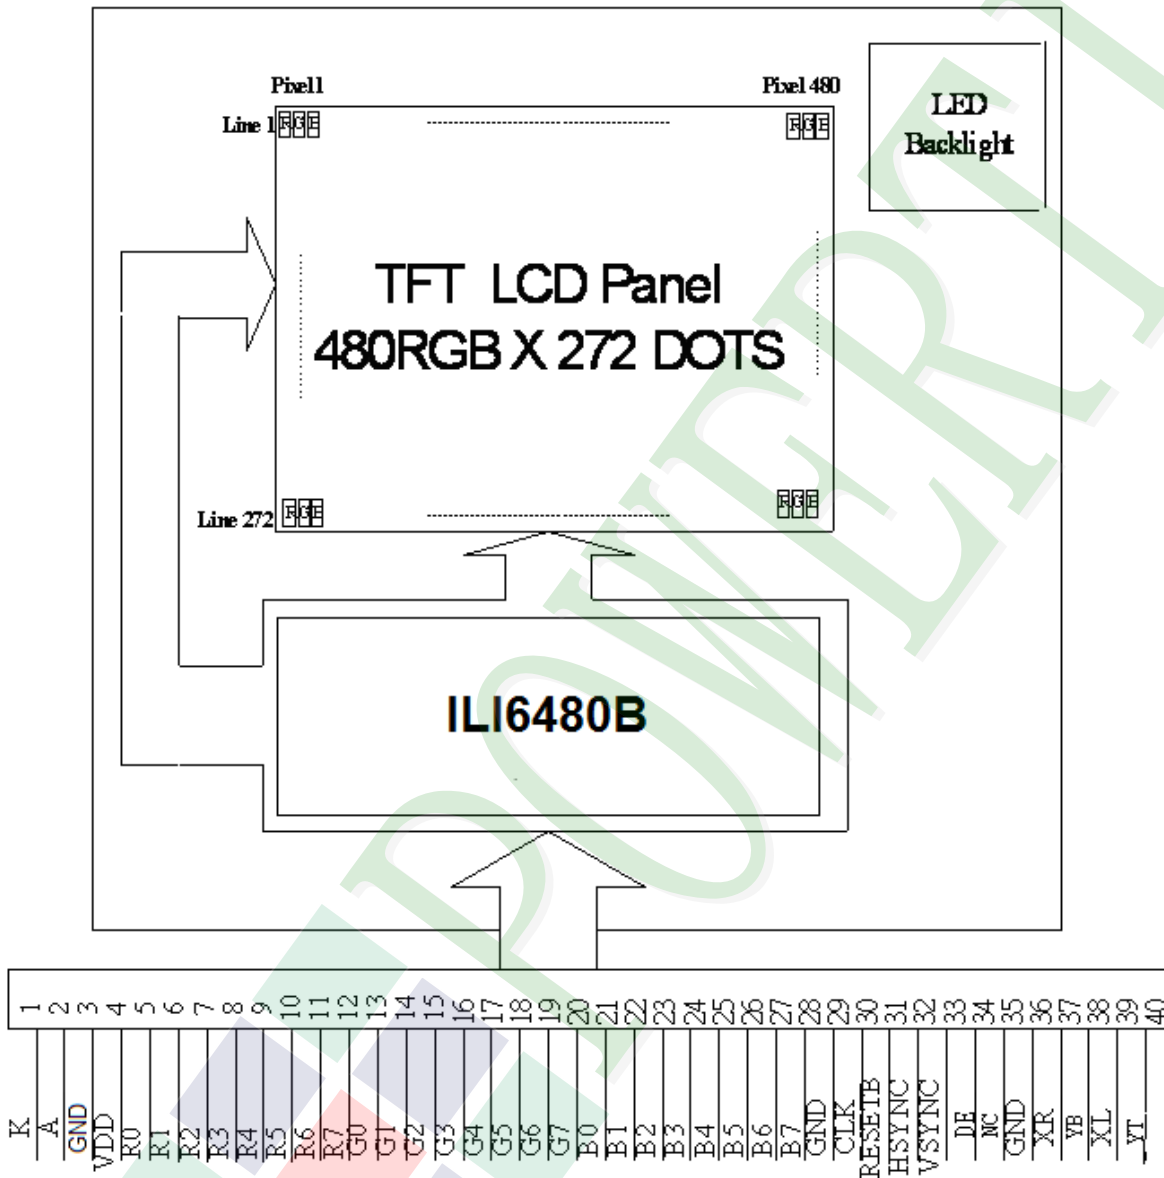


2.2 Interface Pin Description

| Pin No. | Symbol | Function |
|---------|--------|--|
| 1 | K | Power supply for LED Backlight cathode input |
| 2 | A | Power supply for LED Backlight anode input |
| 3 | GND | Ground |
| 4 | VDD | Digital power |
| 5 | R0 | Red data bit 0 |
| 6 | R1 | Red data bit 1 |
| 7 | R2 | Red data bit 2 |
| 8 | R3 | Red data bit 3 |
| 9 | R4 | Red data bit 4 |
| 10 | R5 | Red data bit 5 |
| 11 | R6 | Red data bit 6 |
| 12 | R7 | Red data bit 7 |
| 13 | G0 | Green data bit 0 |
| 14 | G1 | Green data bit 1 |
| 15 | G2 | Green data bit 2 |
| 16 | G3 | Green data bit 3 |
| 17 | G4 | Green data bit 4 |
| 18 | G5 | Green data bit 5 |
| 19 | G6 | Green data bit 6 |
| 20 | G7 | Green data bit 7 |

| Pin No. | Symbol | Function |
|---------|--------|---|
| 21 | B0 | Blue data bit 0 |
| 22 | B1 | Blue data bit 1 |
| 23 | B2 | Blue data bit 2 |
| 24 | B3 | Blue data bit 3 |
| 25 | B4 | Blue data bit 4 |
| 26 | B5 | Blue data bit 5 |
| 27 | B6 | Blue data bit 6 |
| 28 | B7 | Blue data bit 7 |
| 29 | GND | Ground |
| 30 | CLK | Dot data clock |
| 31 | DISP | Display control / standby mode selection "High" : Normal display |
| 32 | HSYNC | Horizontal sync input |
| 33 | VSYNC | Vertical sync input |
| 34 | DE | Data input enable. Active High to enable the data input |
| 35 | N.C | Not Connect. |
| 36 | GND | Ground |
| 37 | XR | Not Connect. |
| 38 | YB | Not Connect. |
| 39 | XL | Not Connect. |
| 40 | YT | Not Connect. |

2.3 Timing Characteristics


2.3.1 Clock and Data Input Waveforms

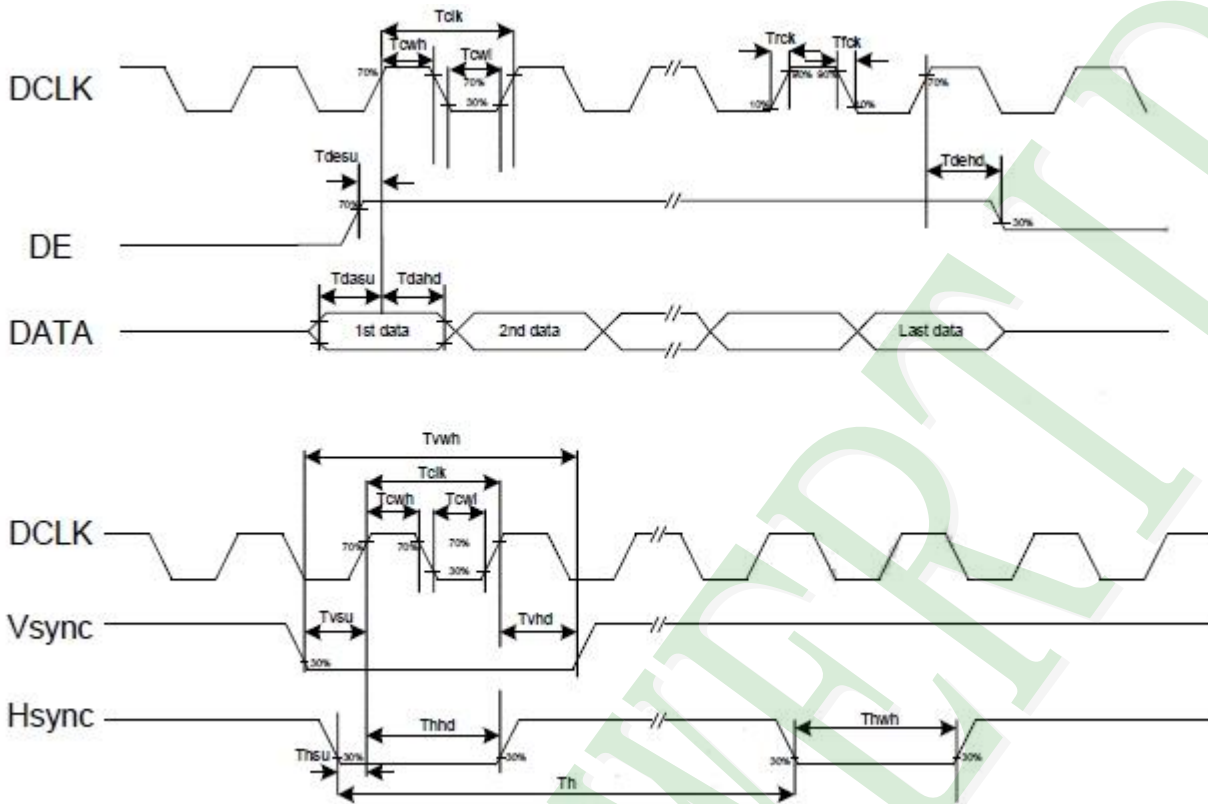

| Parameters | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------------|--------|------|------|------|------|----------------------------------|
| System operation timing | | | | | | |
| VDD power source slew time | TPOR | - | - | 20 | ms | From 0V to 99% VDD |
| GRB pulse width | tRSTW | 10 | 50 | - | us | R=10Kohm, C=1uF |
| Input Output timing | | | | | | |
| DCLK clock time | Tclk | 33.3 | - | - | ns | DCLK=30MHz |
| DCLK clock low period | Tcwl | 40 | - | 60 | % | |
| DCLK clock high period | Tcwh | 40 | - | 60 | % | |
| Clock rising time | Trck | 9 | - | - | ns | |
| Clock falling time | Tfck | 9 | - | - | ns | |
| HSD width | Thwh | 1 | - | - | DCLK | |
| HSD period time | Th | 55 | 60 | 65 | us | |
| HSD setup time | Thsu | 12 | - | - | ns | |
| HSD hold time | Thhd | 12 | - | - | ns | |
| VSD width | Tvwh | 1 | - | - | Th | |
| VSD setup time | Tvsu | 12 | - | - | ns | |
| VSD hold time | Tvhd | 12 | - | - | ns | |
| Data setup time | Tdasu | 12 | - | - | ns | |
| Data hold time | Tdahd | 12 | - | - | ns | |
| DE setup time | Tdesu | 12 | - | - | ns | |
| DE hold time | Tdehd | 12 | - | - | ns | |
| Source output setting time | Tsst | - | - | TBD | us | 10% to 90% CL=60pF, RL=2Kohm |
| Gate output setting time | Tgst | - | - | 1200 | ns | 10% to 90%, CL=60pF |
| VCOM output setting time | Tcst | - | - | TBD | us | 10% to 90%, CL=40nF, RL=50ohm |
| Time from VSD to 1st line data input | Tvs | 3 | 8 | 31 | Th | HV mode By HDL[4:0] setting |

2.3.2 Data Input Format

Vertical input timing

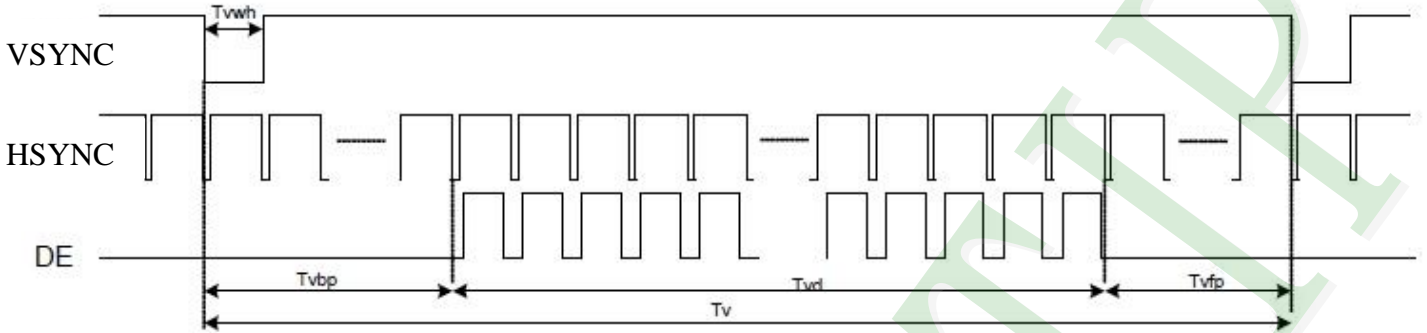


Parallel RGB Mode Data format

(HV Mode)



(DE Mode)

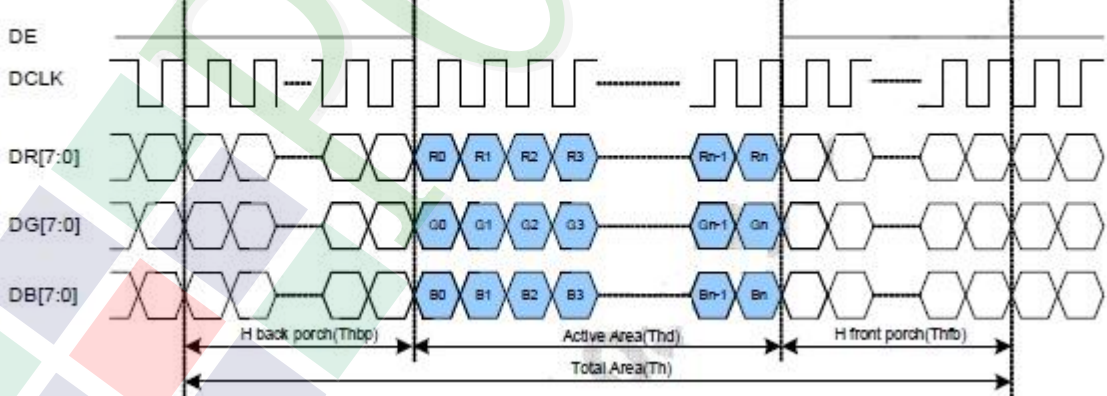



Parallel RGB input timign table

| Parameters | Symbol | Value | | | Unit |
|--------------------|--------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| DCLK frequency | Fclk | 5 | 9 | 12 | MHz |
| VSYNC period time | Tv | 277 | 288 | 400 | H |
| VSYNC display area | Tvd | 272 | | | H |
| VSYNC back porch | Tvb | 3 | 8 | 31 | H |
| VSYNC front porch | Tvfp | 2 | 8 | 97 | H |
| HSYNC period time | Th | 520 | 525 | 800 | DCLK |
| HSYNC display area | Thd | 480 | | | DCLK |
| HSYNC back porch | Thbp | 36 | 40 | 255 | DCLK |
| HSYNC front porch | Thfp | 4 | 5 | 65 | DCLK |

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

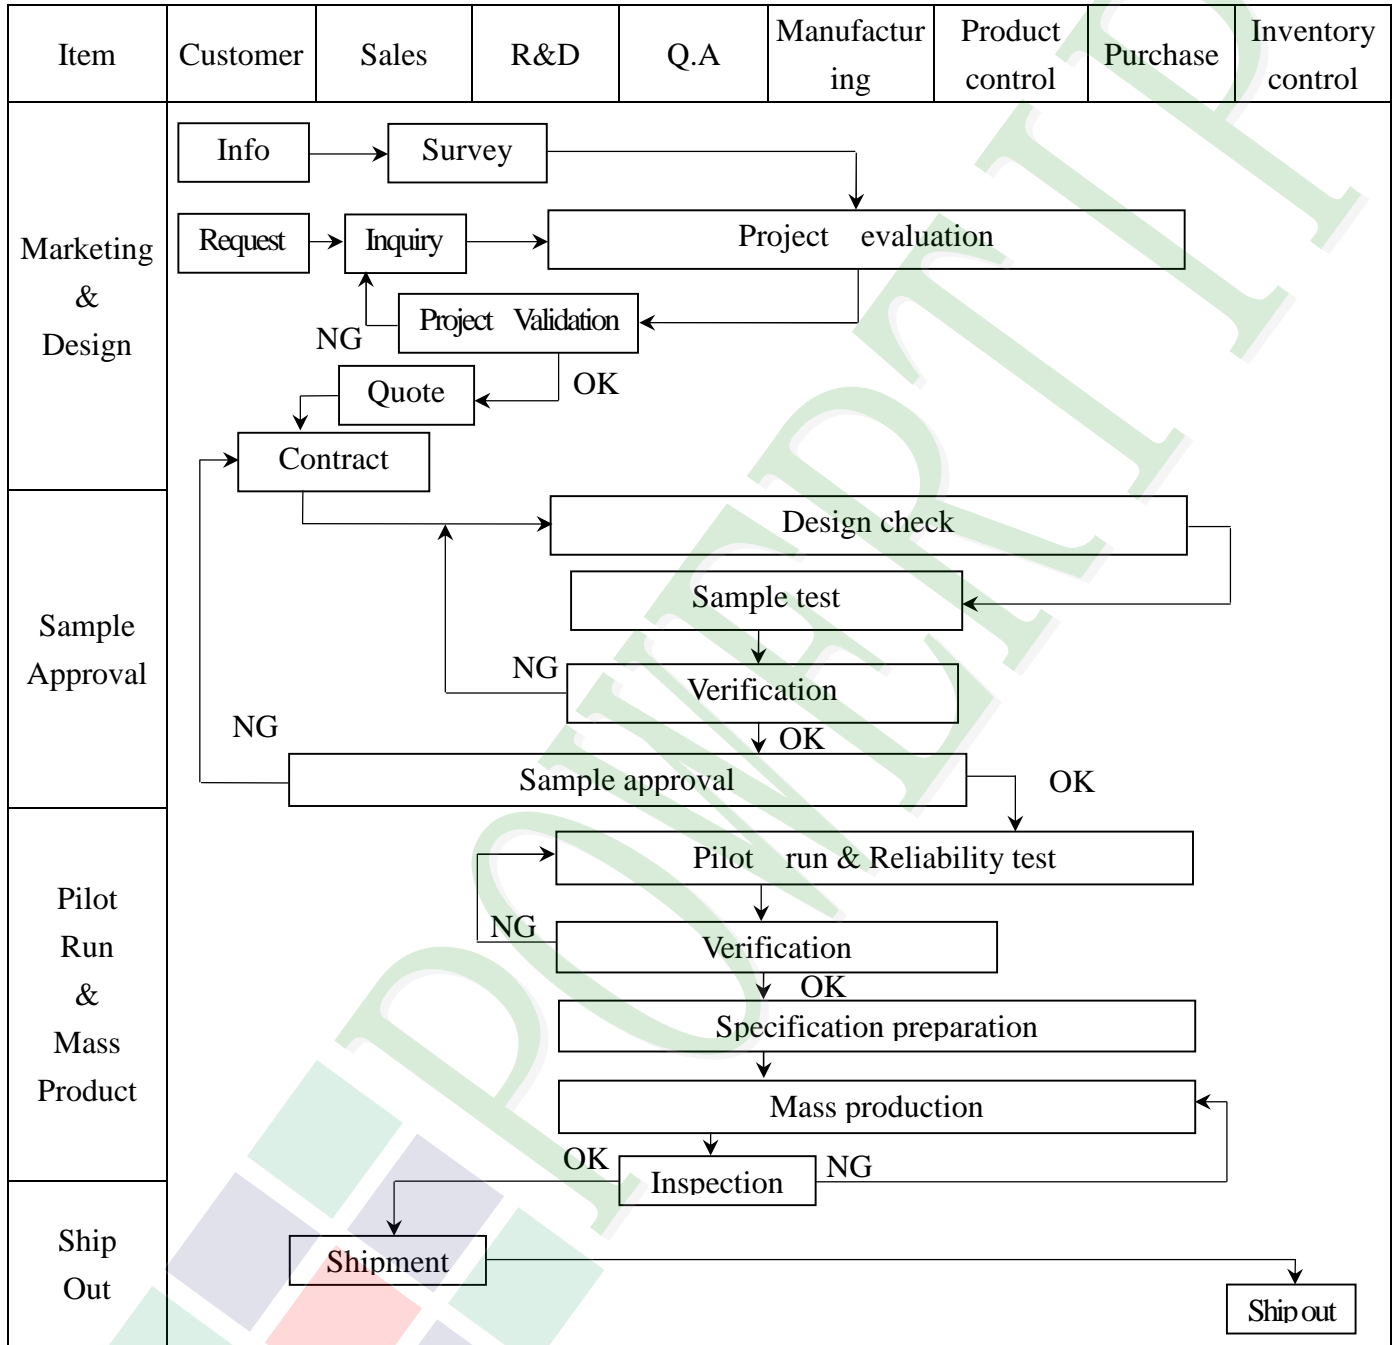

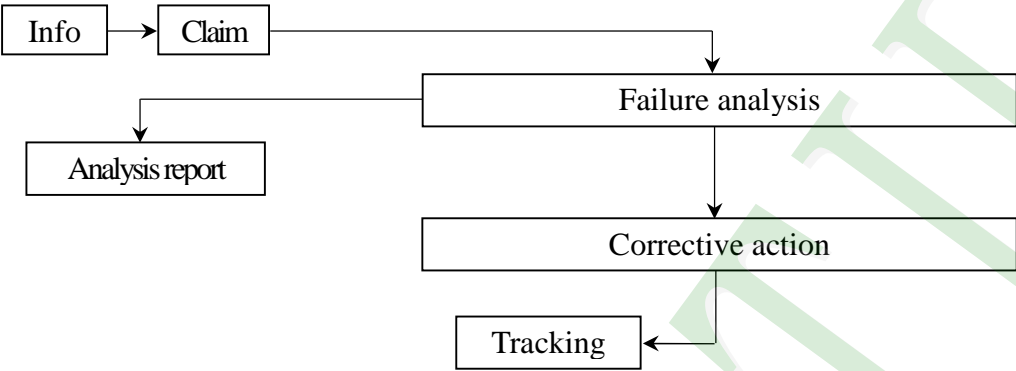
| Item | Customer | Sales | R&D | Q.A | Manufacturing | Product control | Purchase | Inventory control |
|---------------|---|-------|-----|-----|---|-----------------|----------|-------------------|
| Sales Service |  <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Failure --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre> | | | | | | | |
| Q.A Activity | 1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management | | | | 2. Process improvement proposal 4. Education And Training Activities | | | |

3.2. Inspection Specification


- ◆ Scope : The document shall be applied to TFT-LCD Module for 3.5" ~10" (Ver.B01).
- ◆ Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆ Equipment : Gauge 、 MIL-STD 、 Powertip Tester 、 Sample
- ◆ Defect Level : Major Defect AQL : 0.4 ; Minor Defect AQL : 1.5
- ◆ OUT Going Defect Level : Sampling.
- ◆ Standard of the product appearance test :

a. Manner of appearance test :

- (1). The test best be under 20W×2 fluorescent light , and distance of view must be at 30 cm.
- (2). The test direction is base on about around 45° of vertical line.

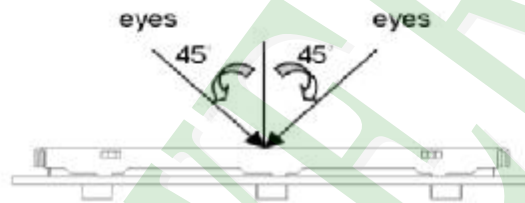

(3). Definition of area.

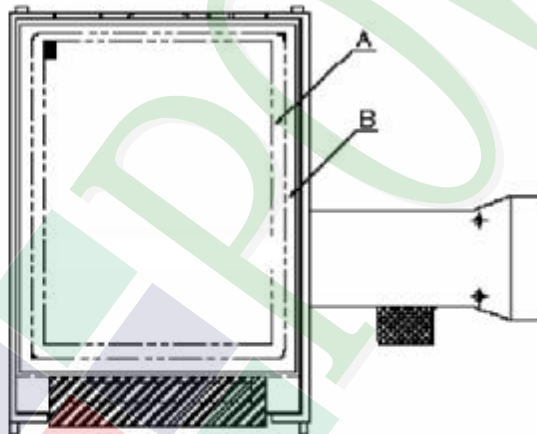

A area : viewing area

B area : Outside of viewing area

(4). Standard of inspection : (Unit : mm)



◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

| NO | Item | Criterion | Level | | | | | | | | | | |
|---|---|---|-------------------|-------------------|------------|----------|----------|----------|-----------|----------|-------|----------|-------|
| 01 | Product condition | 1. 1 The part number is inconsistent with work order of production. | Major | | | | | | | | | | |
| | | 1. 2 Mixed product types. | Major | | | | | | | | | | |
| | | 1. 3 Assembled in inverse direction. | Major | | | | | | | | | | |
| 02 | Quantity | 2. 1 The quantity is inconsistent with work order of production. | Major | | | | | | | | | | |
| 03 | Outline dimension | 3. 1 Product dimension and structure must conform to structure diagram. | Major | | | | | | | | | | |
| | | 4. 1 Missing line character and icon. | Major | | | | | | | | | | |
| 04 | Electrical Testing | 4. 2 No function or no display. | Major | | | | | | | | | | |
| | | 4. 3 Display malfunction. | Major | | | | | | | | | | |
| | | 4. 4 LCD viewing angle defect. | Major | | | | | | | | | | |
| | | 4. 5 Current consumption exceeds product specifications. | Major | | | | | | | | | | |
| 05 | Dot defect (Bright dot , Dark dot) On -display | <table border="1"> <thead> <tr> <th>Item</th> <th>Acceptance (Q'ty)</th> </tr> </thead> <tbody> <tr> <td>Bright Dot</td> <td>≤ 4</td> </tr> <tr> <td>Dark Dot</td> <td>≤ 5</td> </tr> <tr> <td>Joint Dot</td> <td>≤ 3</td> </tr> <tr> <td>Total</td> <td>≤ 7</td> </tr> </tbody> </table> | Item | Acceptance (Q'ty) | Bright Dot | ≤ 4 | Dark Dot | ≤ 5 | Joint Dot | ≤ 3 | Total | ≤ 7 | Minor |
| | | Item | Acceptance (Q'ty) | | | | | | | | | | |
| | | Bright Dot | ≤ 4 | | | | | | | | | | |
| | | Dark Dot | ≤ 5 | | | | | | | | | | |
| | | Joint Dot | ≤ 3 | | | | | | | | | | |
| Total | ≤ 7 | | | | | | | | | | | | |
| 5. 1 Inspection pattern : full white , full black , Red , Green and blue screens. | | | | | | | | | | | | | |
| 5. 2 It is defined as dot defect if defect area $> 1/2$ dot. | | | | | | | | | | | | | |
| 5. 3 The distance between two dot defect ≥ 5 mm. | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |


◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

| NO | Item | Level | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------|---|--------------------------------|-------------------|--|--------|--------|------------------|--------|--|-------------------------|---|--------|-------------------------|---|---------------|----------|--|--------------|-----------|-------------------|-------|--------|--------|-----|---------------|--------|--|---------------|----------------------|---|--------|--------------|----------------------|---|-----|------------|---------------|--|--------------|--|----------|--|-------|
| 06 | <p style="text-align: center;">6.1 Round type (Non-display or display) :</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>Black or white dot , scratch , contamination</p> <p>Round type</p>  <p>$\Phi = (x + y) / 2$</p> <p>Line type</p>  </div> <div style="width: 60%;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">$\Phi \leq 0.25$</td> <td colspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$0.25 < \Phi \leq 0.50$</td> <td style="text-align: center;">5</td> <td rowspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$\Phi > 0.50$</td> <td style="text-align: center;">0</td> </tr> <tr> <td style="text-align: center;">Total</td> <td style="text-align: center;">5</td> <td></td> </tr> </tbody> </table> <p style="text-align: center;">6.2 Line type(Non-display or display) :</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Length (L)</th> <th rowspan="2">Width (W)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">---</td> <td style="text-align: center;">$W \leq 0.03$</td> <td colspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$L \leq 10.0$</td> <td style="text-align: center;">$0.03 < W \leq 0.05$</td> <td style="text-align: center;">4</td> <td rowspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$L \leq 5.0$</td> <td style="text-align: center;">$0.05 < W \leq 0.10$</td> <td style="text-align: center;">2</td> </tr> <tr> <td style="text-align: center;">---</td> <td style="text-align: center;">$W > 0.10$</td> <td colspan="2" style="text-align: center;">As round type</td> </tr> <tr> <td style="text-align: center;">Total</td> <td></td> <td colspan="2" style="text-align: center;">5</td> </tr> </tbody> </table> </div> </div> | Dimension (diameter : Φ) | Acceptance (Q'ty) | | A area | B area | $\Phi \leq 0.25$ | Ignore | | $0.25 < \Phi \leq 0.50$ | 5 | Ignore | $\Phi > 0.50$ | 0 | Total | 5 | | Length (L) | Width (W) | Acceptance (Q'ty) | | A area | B area | --- | $W \leq 0.03$ | Ignore | | $L \leq 10.0$ | $0.03 < W \leq 0.05$ | 4 | Ignore | $L \leq 5.0$ | $0.05 < W \leq 0.10$ | 2 | --- | $W > 0.10$ | As round type | | Total | | 5 | | Minor |
| Dimension (diameter : Φ) | Acceptance (Q'ty) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A area | B area | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi \leq 0.25$ | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.25 < \Phi \leq 0.50$ | 5 | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi > 0.50$ | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Length (L) | Width (W) | Acceptance (Q'ty) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | A area | B area | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| --- | $W \leq 0.03$ | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $L \leq 10.0$ | $0.03 < W \leq 0.05$ | 4 | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $L \leq 5.0$ | $0.05 < W \leq 0.10$ | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| --- | $W > 0.10$ | As round type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total | | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 07 | <p>Polarizer Bubble</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">$\Phi \leq 0.25$</td> <td colspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$0.25 < \Phi \leq 0.50$</td> <td style="text-align: center;">4</td> <td rowspan="2" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$0.50 < \Phi \leq 0.80$</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">$\Phi > 0.80$</td> <td style="text-align: center;">0</td> <td></td> </tr> <tr> <td style="text-align: center;">Total</td> <td style="text-align: center;">5</td> <td></td> </tr> </tbody> </table> | Dimension (diameter : Φ) | Acceptance (Q'ty) | | A area | B area | $\Phi \leq 0.25$ | Ignore | | $0.25 < \Phi \leq 0.50$ | 4 | Ignore | $0.50 < \Phi \leq 0.80$ | 1 | $\Phi > 0.80$ | 0 | | Total | 5 | | Minor | | | | | | | | | | | | | | | | | | | | | | |
| Dimension (diameter : Φ) | Acceptance (Q'ty) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | A area | B area | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi \leq 0.25$ | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.25 < \Phi \leq 0.50$ | 4 | Ignore | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.50 < \Phi \leq 0.80$ | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi > 0.80$ | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



◆Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)
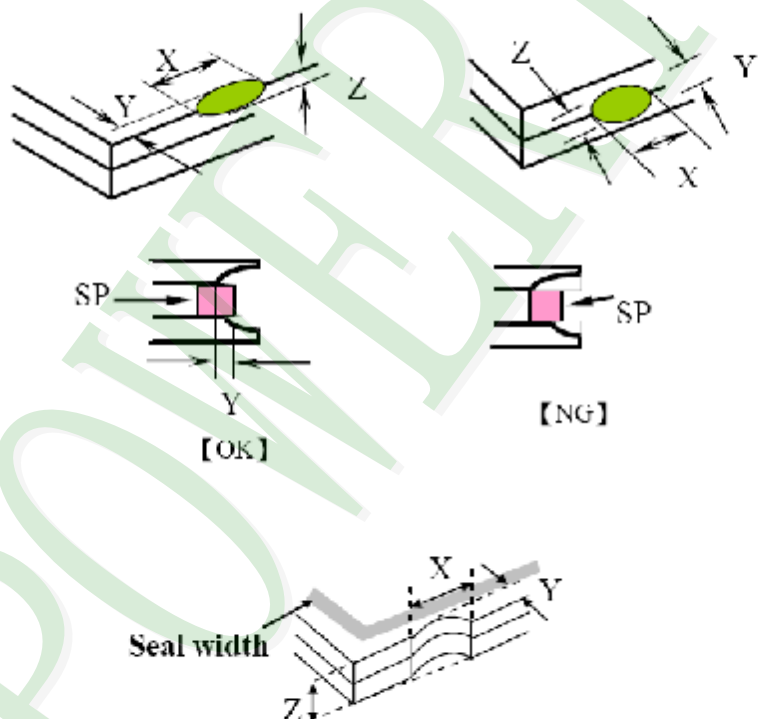
| NO | Item | Criterion | Level | | | | | | |
|----------|--|--|-------|---|---|---|----------|--------------------------------|--------------|
| 08 | The crack of glass | <p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p> | Minor | | | | | | |
| | | <p>8.1 General glass chip :</p> <p>8.1.1 Chip on panel surface and crack between panels:</p>  <table border="1" data-bbox="542 1568 1340 1859"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq a$</td> <td>Crack can't enter viewing area</td> <td>$\leq 1/2 t$</td> </tr> <tr> <td>$\leq a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table> | | X | Y | Z | $\leq a$ | Crack can't enter viewing area | $\leq 1/2 t$ |
| X | Y | Z | | | | | | | |
| $\leq a$ | Crack can't enter viewing area | $\leq 1/2 t$ | | | | | | | |
| $\leq a$ | Crack can't exceed the half of SP width. | $1/2 t < Z \leq 2 t$ | | | | | | | |



◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)
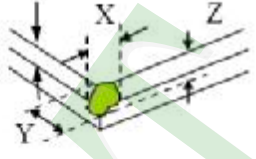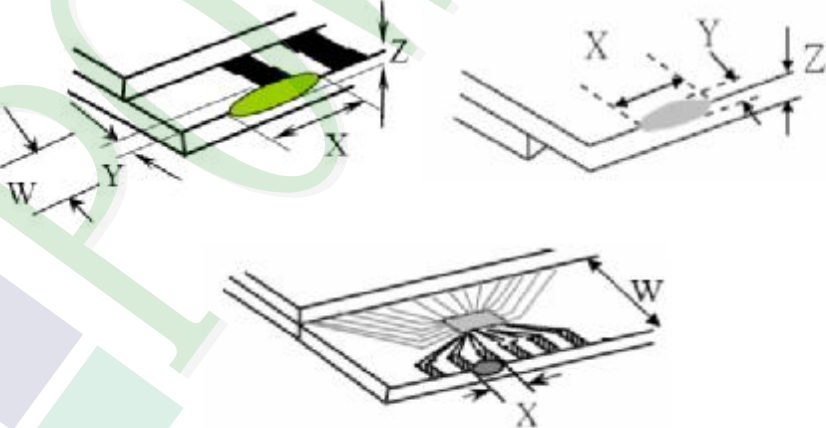
| NO | Item | Criterion | Level | | | | | | | | | | |
|---|--|---|--------------|---|-------|--------------|--------------------------------|----------------|--------------|--|----------------------|--------------|-------|
| 08 | The crack of glass | <p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p> <hr/> <p>8.1.2 Corner crack :</p>  <table border="1" data-bbox="523 772 1332 1064"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't enter viewing area</td> <td>$Z \leq 1/2 t$</td> </tr> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table> | X | Y | Z | $\leq 1/5 a$ | Crack can't enter viewing area | $Z \leq 1/2 t$ | $\leq 1/5 a$ | Crack can't exceed the half of SP width. | $1/2 t < Z \leq 2 t$ | | |
| | | X | Y | Z | | | | | | | | | |
| $\leq 1/5 a$ | Crack can't enter viewing area | $Z \leq 1/2 t$ | | | | | | | | | | | |
| $\leq 1/5 a$ | Crack can't exceed the half of SP width. | $1/2 t < Z \leq 2 t$ | | | | | | | | | | | |
| <p>8.2 Protrusion over terminal :</p> <p>8.2.1 Chip on electrode pad :</p>  <table border="1" data-bbox="561 1691 1343 1863"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Front</td> <td>$\leq a$</td> <td>$\leq 1/2 W$</td> <td>$\leq t$</td> </tr> <tr> <td>Back</td> <td>$\leq a$</td> <td>$\leq W$</td> <td>$\leq 1/2 t$</td> </tr> </tbody> </table> | | X | Y | Z | Front | $\leq a$ | $\leq 1/2 W$ | $\leq t$ | Back | $\leq a$ | $\leq W$ | $\leq 1/2 t$ | Minor |
| | X | Y | Z | | | | | | | | | | |
| Front | $\leq a$ | $\leq 1/2 W$ | $\leq t$ | | | | | | | | | | |
| Back | $\leq a$ | $\leq W$ | $\leq 1/2 t$ | | | | | | | | | | |

◆ Specification For TFT-LCD Module 3.5" -10" :

(Ver.B01)
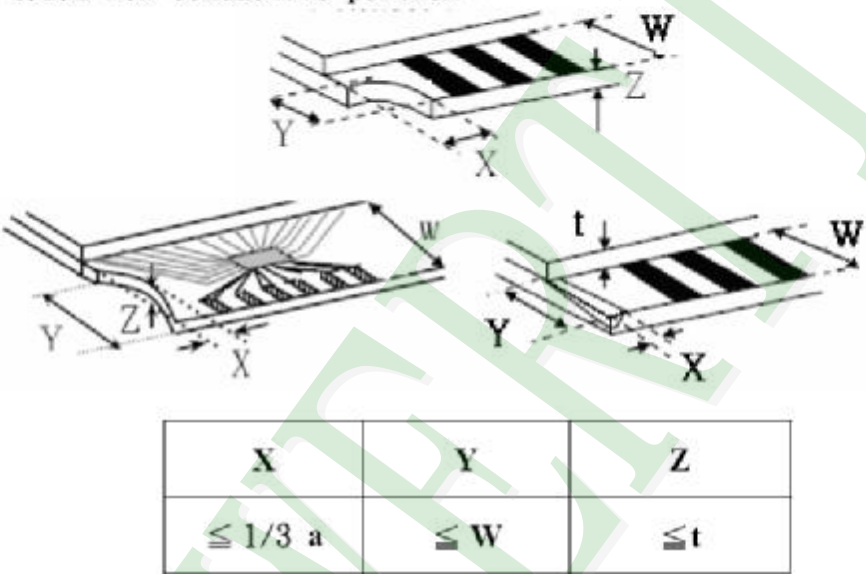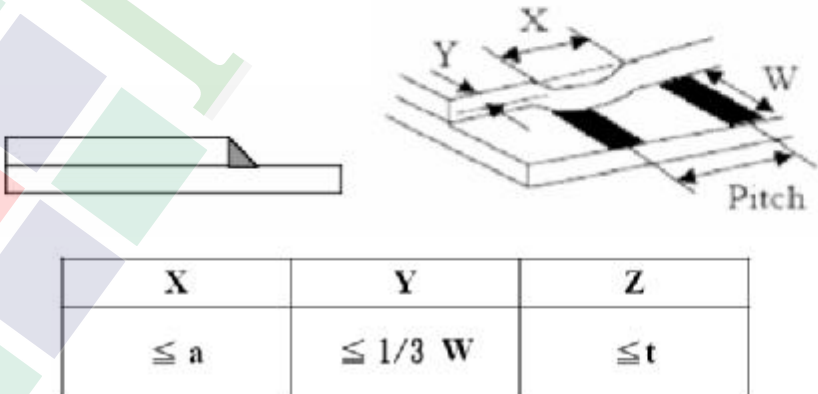
| NO | Item | Criterion | Level |
|----|--------------------|--|-------|
| 08 | The crack of glass | <p>Symbols :</p> <p>X : The length of crack Y : The width of crack. Z : The thickness of crack W : terminal length t : The thickness of glass a : LCD side length</p> | Minor |
| | | <p>8.2.2 Non-conductive portion :</p>  <p>⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>8.2.3 Glass remain :</p>  | |

◆Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

| NO | Item | Criterion | Level |
|----|--------------------|---|-------|
| 09 | Backlight elements | 9. 1 Backlight can't work normally. | Major |
| | | 9. 2 Backlight doesn't light or color is wrong. | Major |
| | | 9. 3 Illumination source flickers when lit. | Major |
| 10 | General appearance | 10. 1 Pin type 、 quantity 、 dimension must match type in structure diagram. | Major |
| | | 10. 2 No short circuits in components on PCB or FPC . | Major |
| | | 10. 3 Parts on PCB or FPC must be the same as on the production characteristic chart .There should be no wrong parts , missing parts or excess parts. | Major |
| | | 10. 4 Product packaging must the same as specified on packaging specification sheet. | Minor |
| | | 10. 5 The folding and pceled off in polarizer are not acceptable. | Minor |
| | | 10. 6 The PCB or FPC between B/L assembled distance(PCB or FPC) is ≤ 1.5 mm. | Minor |

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully, do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM

5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.


5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.


1. 包裝材料規格表 (Packaging Material) : (per carton)

| No. | Item | Model | Dimensions (mm) | 1Pcs Weight | Quantity | Total Weight |
|-----|----------------------|------------------|--------------------|-------------|----------|--------------|
| 1 | 成品 (LCM) | PH480272T009-IBA | 105.5 X 67.2 X 3.6 | 0.059 | 120 | 7.08 |
| 2 | 多層薄膜(1)POF | OTFILM0BA03ABA | 19"X350X0.015 | — | 6 | — |
| 3 | TRAY 盤 (2)Tray | TYPH48027201BA | 352 X 260 X 12.8 | 0.1 | 36 | 3.6 |
| 4 | 內盒(3)Product Box | BX36627063ABBA | 383 X 270 X 66 | 0.182 | 6 | 1.092 |
| 5 | 保利龍板(4)Pollyon board | OTPLB00PL08ABA | 550 X 393 X 20 | 0.0284 | 2 | 0.0568 |
| 6 | 外紙箱(5)Carton | BX57041027CCBA | 570 X 410 X 265 | 1.0 | 1 | 1.0 |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |

2. 一整箱總重量 (Total LCD Weight in carton) : 12.83 Kg±10%
 3. 單箱數量規格表 (Packaging Specifications and Quantity) :
 (1) LCM quantity per box : no per tray 4 x no of tray 5 = 20
 (2) Total LCM quantity in carton : quantity per box 20 x no of boxes 6 = 120

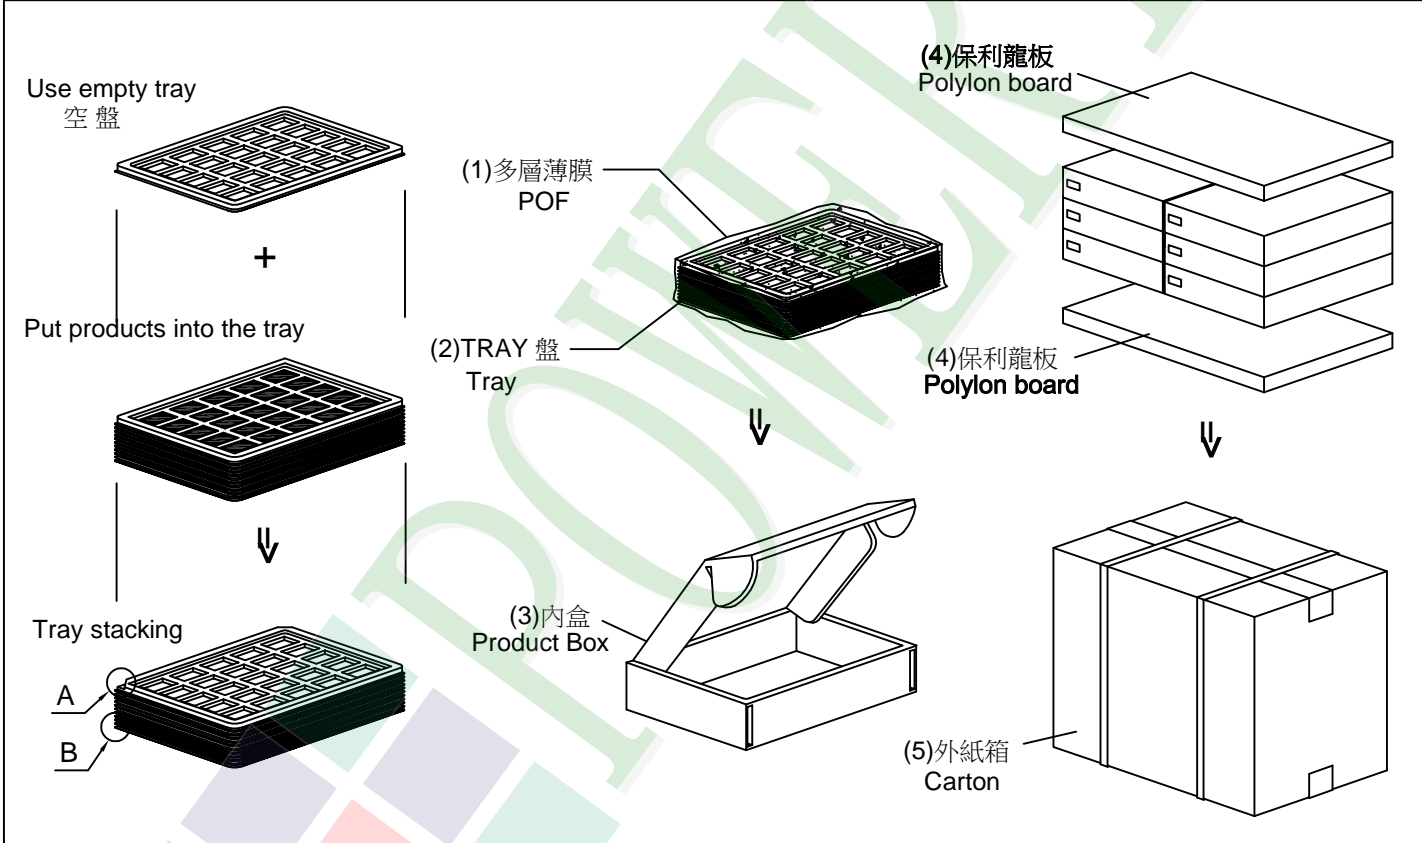

特 記 事 項 (REMARK)

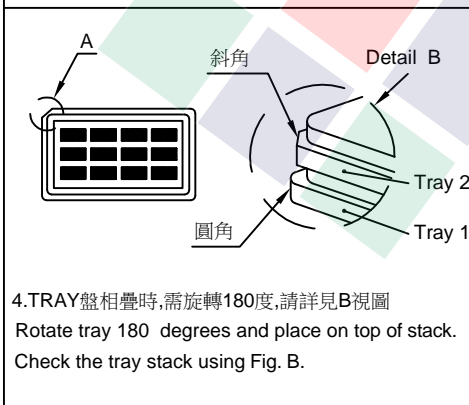

4. TRAY盤相疊時,需旋轉180度,請詳見B視圖
 Rotate tray 180 degrees and place on top of stack.
 Check the tray stack using Fig. B.