



ProLED-2W-CC180

Professional Led Modules; **5-15cm** 3D double-sided lightboxes



■ Features:

- luminous efficacy 170 lm/W
- for indoor and outdoor use
- 20 pcs in chain



UK
CA

CE

TECHNICAL DETAILS

12V
DC

0.72W

175°

IP
67

122 lm

7
YEARS
WARRANTY

50000h

PWM

MODEL	ProLED-2W-CC180
Supply voltage	12V DC
Power consumption per module	0.72W
Chain power consumption	14.4W
Current consumption per module	60mA
LED diodes	LumiLEDs - 2835
Quantity of LEDs	2
Light color	White (~7000K)
Luminous flux	122lm (W)
Luminous flux density	170lm (W)
Color rendering index - CRI	≥80
Beam angle	175°
Current stabilization	No
Dimming	Yes
Module dimensions (L x W x H)	50 x 16 x 11mm
Cable length	130mm
Number of modules in 1m	5.5
Box weight	17kg
Packing	Chain – 20pcs / Bag – 100pcs / Box – 1600pcs
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 50000h
Working temperature	-25°C ÷ 60°C
IP protection	IP67
Warranty	7 years




ProLED-2W-CC180

Professional Led Modules; **5-15cm** 3D double-sided lightboxes



Dimensions

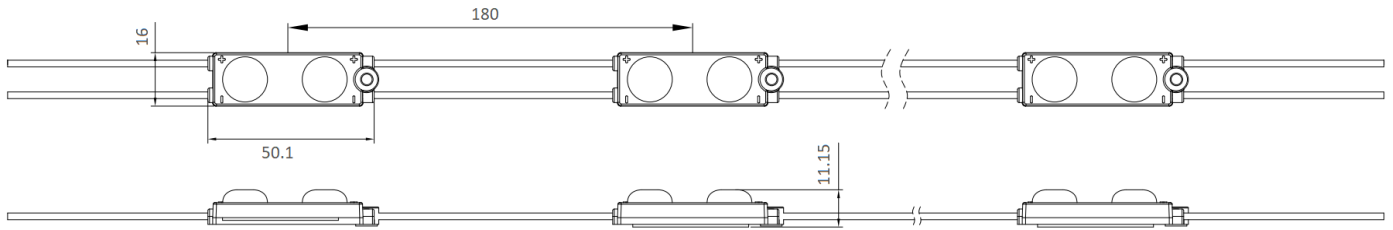

Connection diagram

One-side power input:



Maximum number of modules 20 pcs

Two-side power input:




Maximum number of modules 40 pcs


It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power

Light color / CCT

Light color

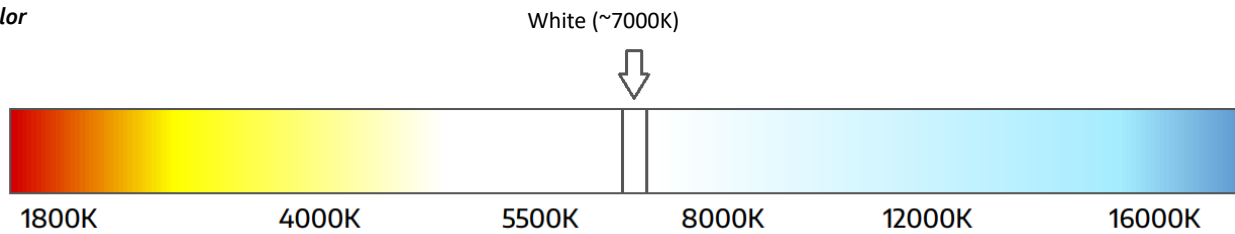


Packing



Chain
20 pcs



Bag
100 pcs



Box
2800 pcs




ProLED-2W-CC180




Professional Led Modules; 5-15cm 3D double-sided lightboxes

Application

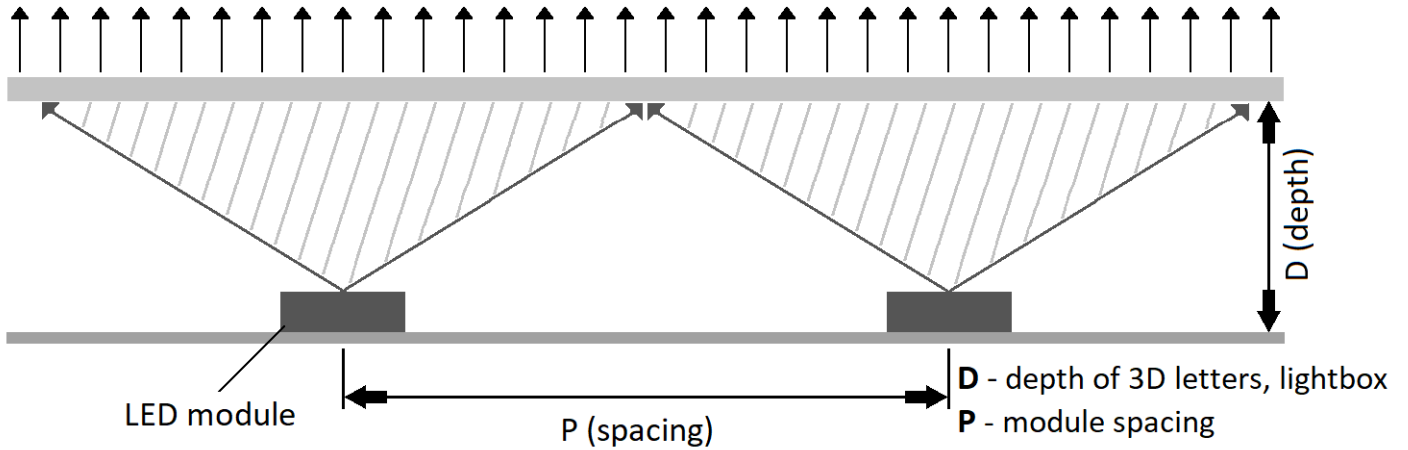

$$\text{optical performance proportion} = \frac{D}{P} = 1 : 1.3$$

Overall micro lens design can improve the lens uniformity performance.

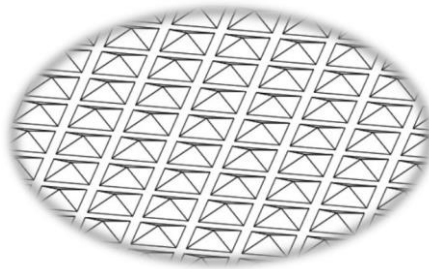

Energy label / Beam Angle

ENERGY

MW LIGHTING

ProLED-2W-CC180 v.2

A
B
C
D
E
F
G

1
kWh/1000h

2019/2015

