

## 12V dual signal Addressable RGB LED Strip 30LEDs/m



### ◆ Product Description:

Addressable 12V LED Strip with 30pcs SMD5050 RGB WS2815/GS8208 LEDs

Dual signal line transmission and Break point resume  
The strip will keep working if any LED becomes damaged or physically removed

30Pixels/m, cut-able every 33.3mm

DC12V voltage, the voltage drop will be less

White & Black PCB, PCB wide is 10mm

5 Meters per reel, Customized sizes are also available


4Pin JST SM connector, IP Rate: IP20,IP64,IP65



### ◆ Product Datasheet

Product Number	S010030CB3SB7	Luminance/M	R: 18lm G: 56lm B: 18lm
Operating Voltage	DC12V	Ra	/
Power/M	4.5W	Beam Angle	120°
SMD Type	SMD 5050	Size (mm)	5000 * 10mm
LED Qty/M	30	IP Rate	IP20/IP64/IP65
Color	RGB	Operation Temperature	- 25 ~ 60 °C
Pixel/M	30	Material	FPC
Control	SPI - WS2815/SPI - GS8208	Cutting Length	33.3mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	0.13KG


### ◆ Outline Dimension (unit: mm)

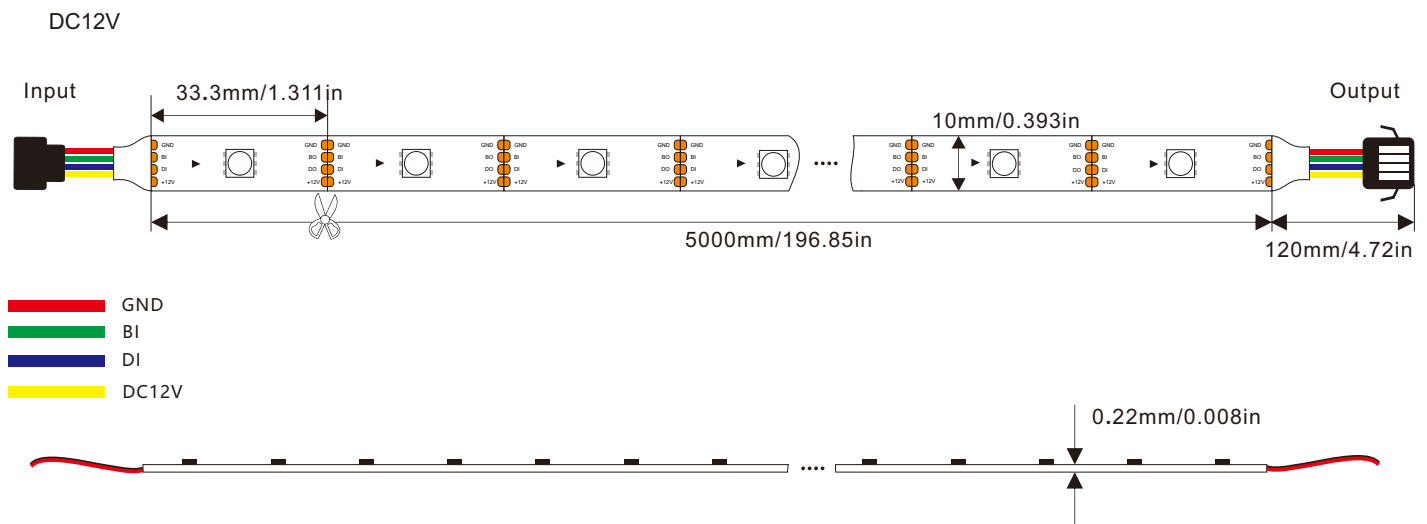


## ◆ Order number

DC12V	RGB	White PCB	IP20	S010030CB3SB7/C1
DC12V	RGB	White PCB	IP65	S010030CB3SB7/C2

## ◆ Wiring diagram

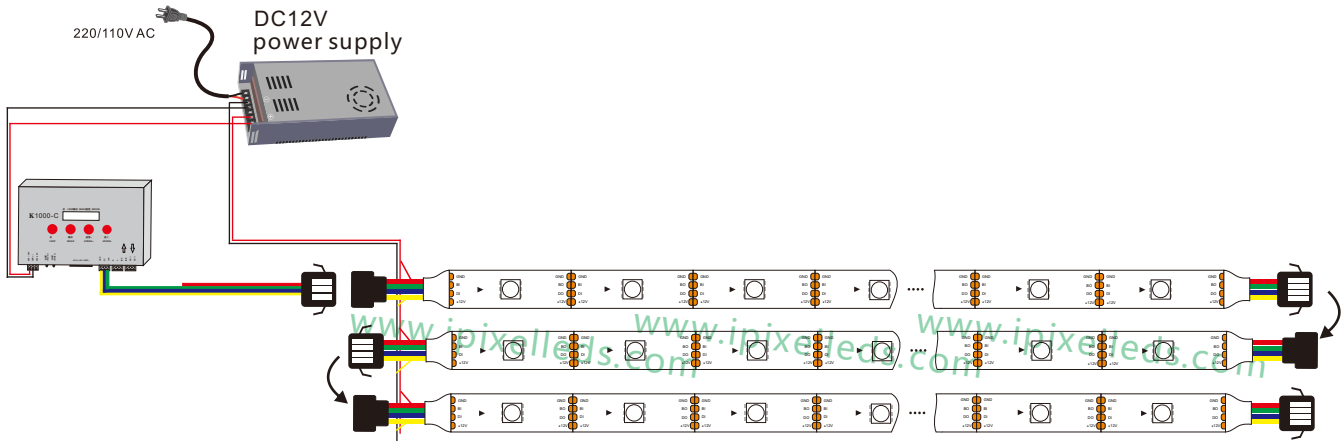

## ◆ Strip IP Rate

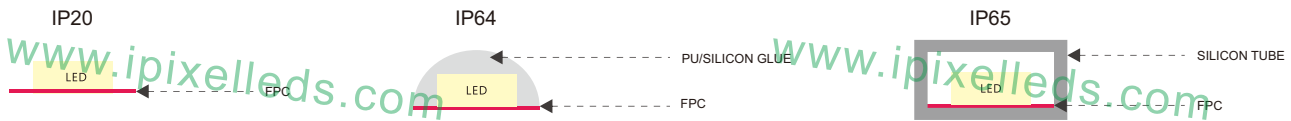

## ◆ Accessories



Screw




Silicone clip



End cap

## ◆ Schematic diagram of maximum bending prevention

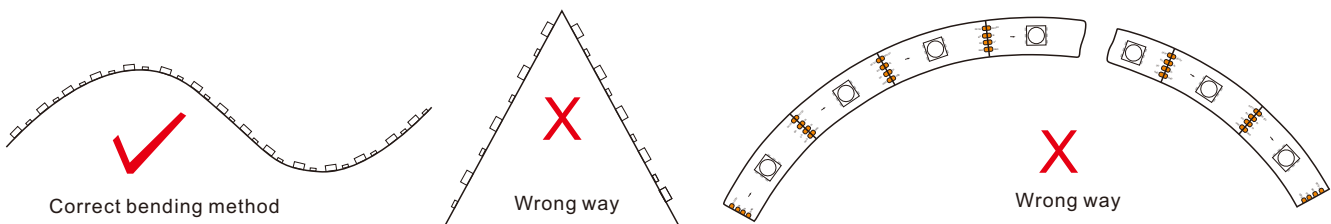

Note: The parameters are subject to change without notice!