


Dual Color COB LED strip 640LEDs/m



◆ Product Description

- High density, the light is even and soft
- High efficiency, remarkable energy saving effect
- Double layer PCB, balancing voltage drop, heat dissipation and flexibility.
- Chip longitudinal distribution, high reliability;
- Dual white design, color changing from 2700K to 6500K.
- SDCM is less than 5 steps
- Standard 5M/roll, length can be customized

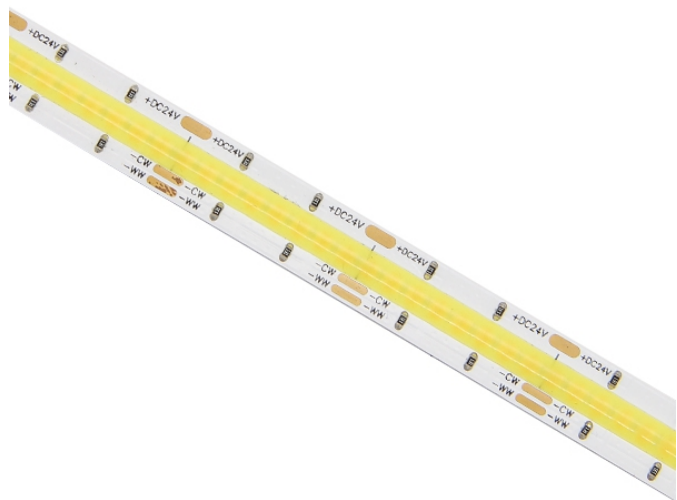


◆ Product Datasheet

Product Number	S010640ZC2PZ
Operating Voltage	DC24V
Power/m	16W
SMD Type	COB
LED Qty/m	640
Cutting Length	50mm
Color	2700K+6500K
Luminance/m	CW: 1029 WW:722lm
Control	PWM
Beam Angle	180°
Size (mm)	5000x10mm
IP Rate	IP20/IP65
Operation Temperature	- 25 ~ 60°C
Net Weight/Roll	0.13Kg


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, ±15% tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit: mm)

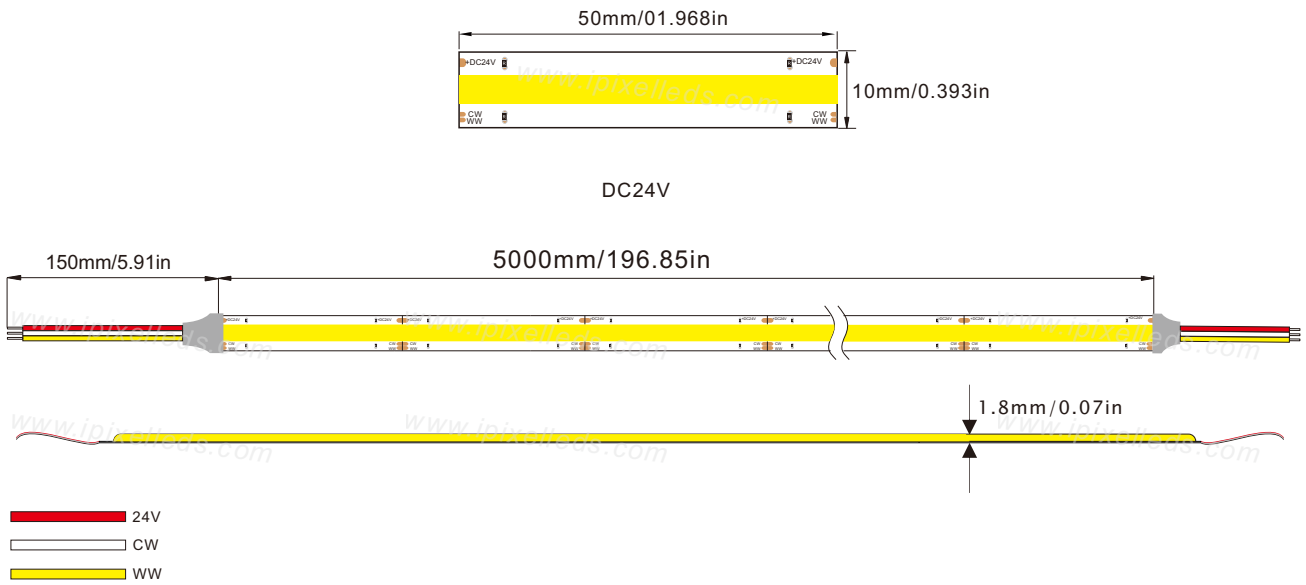

Wiring diagram

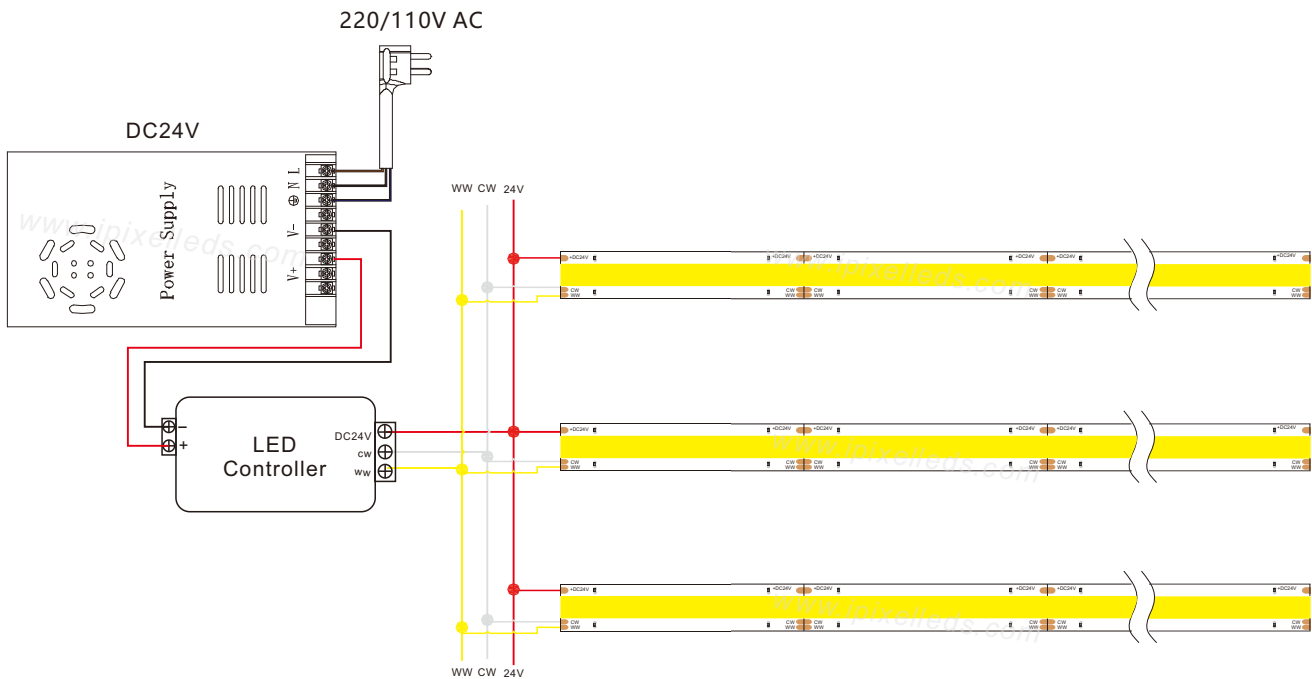

IP Rate



◆ Order number

DC24V	2700K+6500K	White PCB	IP20	S010640ZC2PZ/C1
DC24V	2700K+6500K	White PCB	IP65	S010640ZC2PZ/C2

◆ Related products



Power supply




Alum profile




RF dimmer


◆ Schematic diagram of maximum bending prevention



Bending diameter $\geq 20\text{mm}$

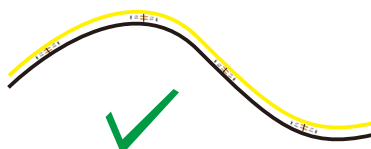

Correct bending method

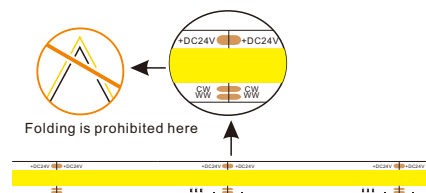

Wrong method

◆ Product packaging



Reel



Antistatic bag

