




DIN 7991

~ISO 10642

Standard withdrawn

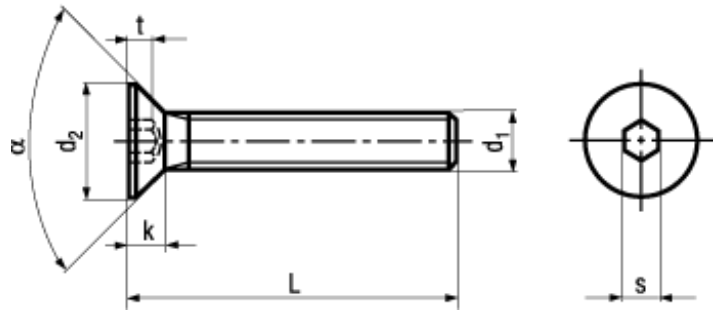

BN 4719

Hex socket flat countersunk head screws

fully threaded

Stainless steel A4

- ~UNI 5933



The general change-over from DIN 7991 to ISO 10642 in the practice requires a verification of the application.

M2; M2,5: not included in DIN 7991

Article#	d ₁	d ₂ max.	k max.	s	t	α	L
1013920	M2	4	1,2	1,3	0,75	90°	(3)
1014498							(4)
1014501							(5)
1014838							(6)
1099868							8
1014846							10
1099876							12
1099884							16
1099906	M2,5	5	1,5	1,5	0,8	90°	(4)
1099914							(5)
1099922							(6)
1099930							8
1099949							10
1099957							12
1016474							16
1019082							20
1019147	M3	6	1,7	2	1,2	90°	(6)
1019163							8
1019171							10
1019198							12
1712969							(14)
1109715							16
1100092							20
1100114							25
1100130							30
1100157	M4	8	2,3	2,5	1,8	90°	(6)

M2; M2,5: not included in DIN 7991

Article#	d ₁	d ₂ max.	k max.	s	t	α	L
1100173	M4	8	2,3	2,5	1,8	90°	8
1100203							10
1100238							12
1713310							(14)
1100254							16
1713337							(18)
1100270							20
1019295							25
1019309							30
1019317							35
1019325							40
3257075							50
1019333	M5	10	2,8	3	2,3	90°	8
1019341							10
1032437							12
1713566							(14)
1032666							16
1713736							(18)
1037811							20
1037838							25
1100319							30
1100351							35
1100378							40
1100394							(45)
1100432							50
1037846							60
1100459	M6	12	3,3	4	2,5	90°	8
1100580							10
1100599							12
1713833							(14)
1038060							16
1713876							(18)
1096176							20
3202142							(22)
1096192							25
1096206							30
1096516							35
1097067							40
1097075							(45)
1097083							50
1097202							60

M2; M2,5: not included in DIN 7991

Article#	d ₁	d ₂ max.	k max.	s	t	α	L
1097210	M6	12	3,3	4	2,5	90°	70
1097229	M8	16	4,4	5	3,5	90°	12
1097237							16
1100602							20
1100610							25
1100629							30
1100637							35
1100645							40
1100653							(45)
1100661							50
1100688							60
1100998							70
1101005							80
8281335							90