


**MONITORING**



## FEATURES

- ✓ Reversible (left and right hand).
- ✓ With monitoring.
- ✓ Maximum load of the microswitch AC (125V)-3A/DC (30V)-2A.
- ✓ Height 78.5 mm, width 21.5 mm.
- ✓ For narrow profiles.
- ✓ Fail – secure (NC) and fail-safe (NO) models.
- ✓ Assembling screws distance – 52 mm.
- ✓ Latch adjustment 4 mm.
- ✓ Power supply: 6, 12, 24, 48 V AC / DC.
- ✓ Low or very low power consumption.
- ✓ Durability: grade C - 200,000 cycles.
- ✓ Category of use - grade 3 - suitable for public buildings
- ✓ Certificate of Conformity acc. to EN 14846.

## TECHNICAL DATA

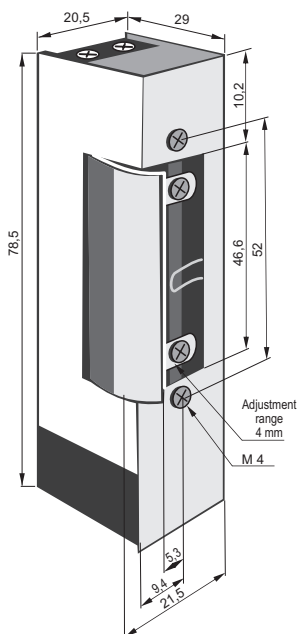

Model		
Standard	Low consump.	NO
1760	1768	1761

Power supply (V)	6-12V AC/DC Standard	12-24V AC/DC Standard	12-24V AC/DC Low consump. 12V	24-48V AC/DC Low consump. 24V	12V DC NO	24V DC NO
Tolerance (%)	± 5 %					
Continuous work	< 1 min.	< 1 min.	100 % 12V DC <1 min. 12V AC <1 min. 24V AC/DC	100 % 24V DC <1 min. 24V AC <1 min. 48V AC/DC	100 %	100 %
Resistance (Ω)	8,5	20	40	150	60	150
Power consumption DC (mA)	6V / 700 12V / 1400	12V / 600 24V / 1100	12V / 300 24V / 600	24V / 170 48V / 340	12V / 200 -	24V / 160 -
Power consumption (mA)	6V / 600 12V / 1200	12V / 500 24V / 1000	12V / 250 24V / 510	24V / 150 48V / 300	-	-
max preload DC (N)	10	10	10	10	10	10
Max preload AC (N)	90	90	90	90	-	-

Recommended front plates: 900; 901; 902; 903; 913