


Cu Earthing Strap

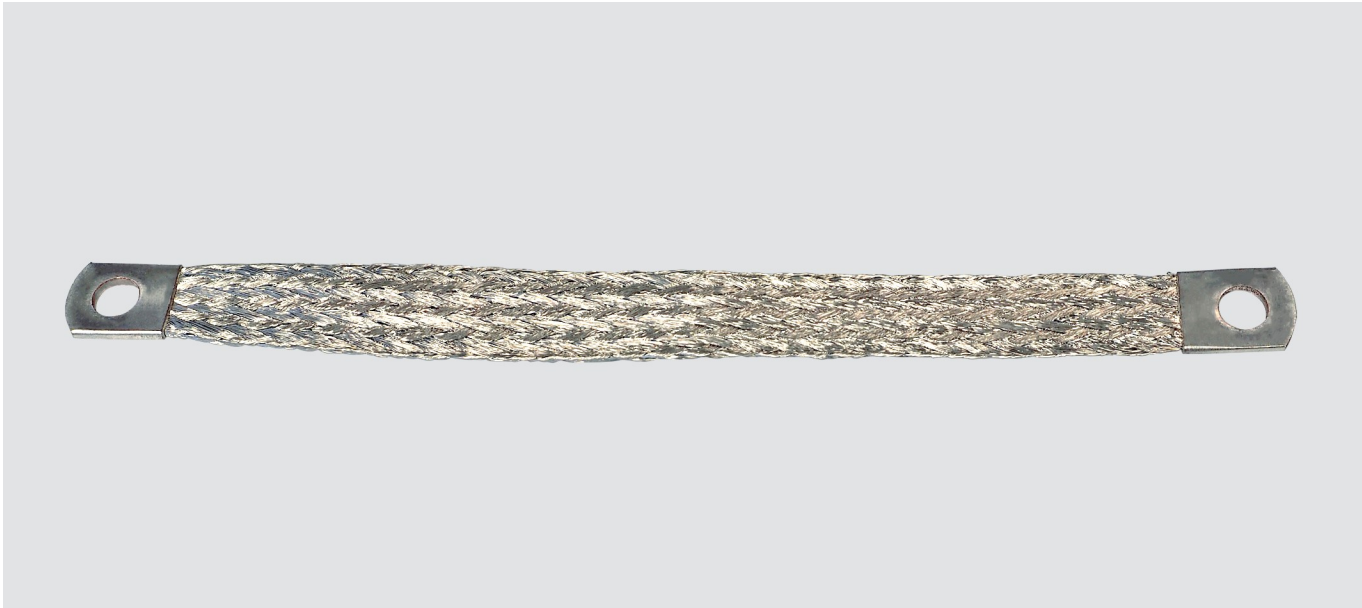

Cu Earthing Strap

- for EMC applications (interference elimination)
- rounded contacts

Application

- automobile industry
- robots
- control panel construction

Material

tinned copper

Note


- other lengths and inner diameters available on request

Technical data

Temperature range: -20°C up to +125°C

individual strand size: 0.2 mm

contact areas made of seamless, pressed ferrules

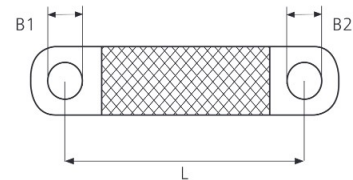

Part no.	Type	Cross-section mm ²	Length Drill hole in mm	Boring B1 in mm	Boring B2 in mm	Unit
11008412	HELU-MB-CUV-6-150-0507-R	6	150	4,5	6,5	50
11008411	HELU-MB-CUV-6-500-0707-R	6	500	6,5	6,5	50
11008421	HELU-MB-CUV-10-200-0707-R	10	200	6,5	6,5	50
11008422	HELU-MB-CUV-10-200-0909-R	10	200	8,5	8,5	50
11008423	HELU-MB-CUV-10-300-0707-R	10	300	6,5	6,5	50
11008424	HELU-MB-CUV-10-300-0909-R	10	300	8,5	8,5	50
11008425	HELU-MB-CUV-10-400-0909-R	10	400	8,5	8,5	50
11008442	HELU-MB-CUV-16-100-0909-R	16	100	8,5	8,5	50
11008443	HELU-MB-CUV-16-200-0707-R	16	200	6,5	6,5	50
11008445	HELU-MB-CUV-16-200-0709-R	16	200	6,5	8,5	50
11008378	HELU-MB-CUV-16-200-0909-R	16	200	8,5	8,5	50
11008446	HELU-MB-CUV-16-250-0709-R	16	250	6,5	8,5	50
11008444	HELU-MB-CUV-16-300-0707-R	16	300	6,5	6,5	50
11008447	HELU-MB-CUV-16-300-0709-R	16	300	6,5	8,5	50
11008379	HELU-MB-CUV-16-300-0909-R	16	300	8,5	8,5	50
11008441	HELU-MB-CUV-16-400-0909-R	16	400	8,5	8,5	50
11008448	HELU-MB-CUV-16-500-0909-R	16	500	8,5	8,5	50
11008449	HELU-MB-CUV-16-600-0909-R	16	600	8,5	8,5	50
11008450	HELU-MB-CUV-16-1200-0909-R	16	1200	8,5	8,5	50
11008461	HELU-MB-CUV-25-200-0909-R	25	200	8,5	8,5	50
11008462	HELU-MB-CUV-25-300-0909-R	25	300	8,5	8,5	50
11009170	HELU-MB-CUV-35-500-0909-R	35	500	8,5	8,5	50

Dimensions and specifications may be changed without prior notice.