


FEATURES

- ✓ Reversible electromagnetic door bolt NO (opened while energizing).
- ✓ It is possible to instal the bolt vertically or horizontally (bolt down).
- ✓ Signaling of closing and opening the door.
- ✓ Interlock against activation when the door is in the wrong position.
- ✓ Over voltage protection.
- ✓ Reverse polarity protection.

TECHNICAL DATA

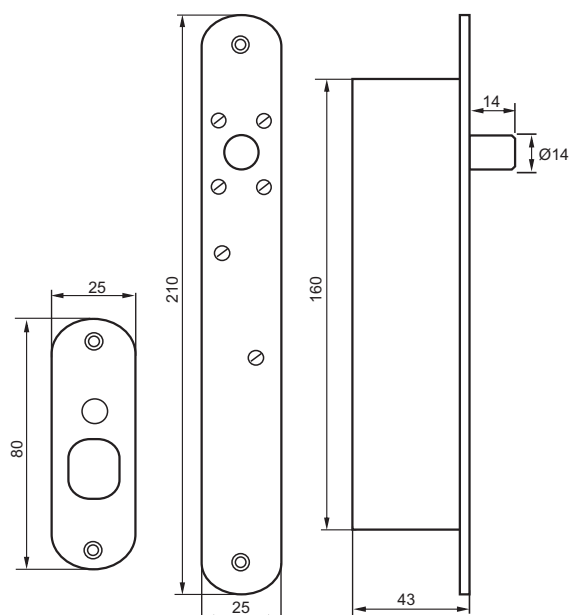

Power supply	12/24 V DC
Power consumption - START	850 mA dla 12V DC 600 mA dla 24V DC
Power consumption - WORK	200 mA dla 12V DC 100 mA dla 24V DC
Adjustable closing delay	0, 3, 6, 9 sek.