

2J6302MP

2.4/5.0 GHz ISM Adhesive/Magnetic Mount

Also available Adhesive (P) only or Magnetic (M) only

Key Features

2.4/5.0 GHz ISM

- 2410-2490 MHz
- 4920-5925 MHz

Adhesive/Magnetic Mount

Ground Plane Dependent

Customizable Cable and Connector

Dimensions Ø 52.5 x 14.3 mm

Certificates: IP67



1. Antenna and electrical specifications

Parameters	2.4/5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~-14.2	~-15.7
VSWR	~1.6:1	~1.5:1
Efficiency (%)	~42.7	~29.7
Peak Gain (dBi)	~1.7	~2.3
Average Gain (dB)	~-3.7	~-5.3
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	Most RF Connectors (SMA-Male Standard)	
Cable Length	Any Cable Length (300cm Standard)	
Cable Type	Other Cables Available (RG174 Standard)	



Antenna Measurement Conditions:



Mounted on 30 x 30 cm Ground Plane
 200 cm RG174 Cable
 Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J6302MP
Mounting Type	Adhesive/Magnetic Mount, Also available Adhesive (P) only or Magnetic (M) only
Dimensions (mm)	Ø 52.5 × 14.3
Radome	PC/ABS UV Stable
Radome color	Black
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67


3. Antenna parameters

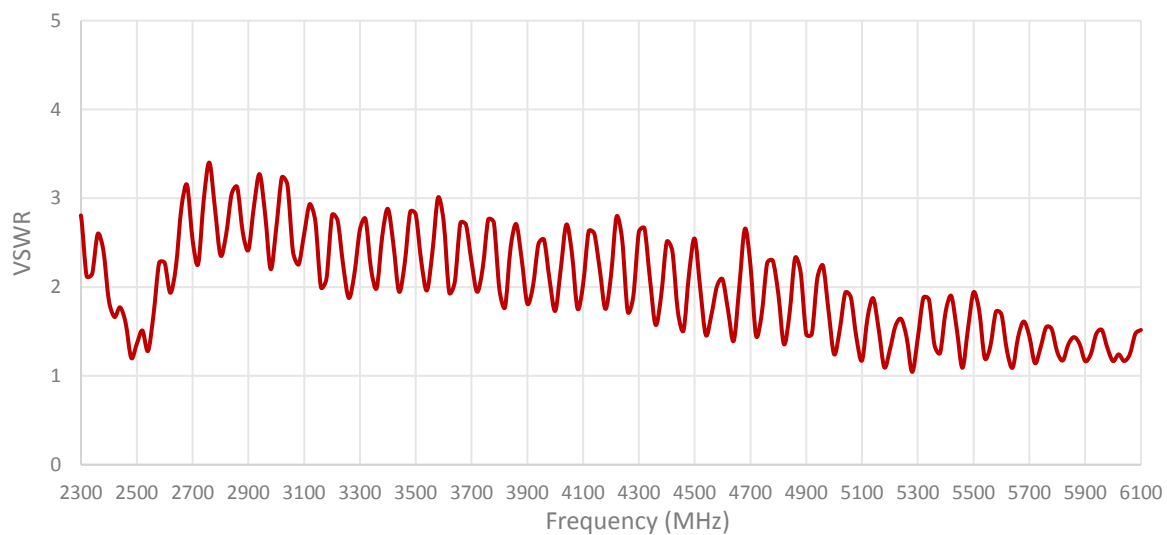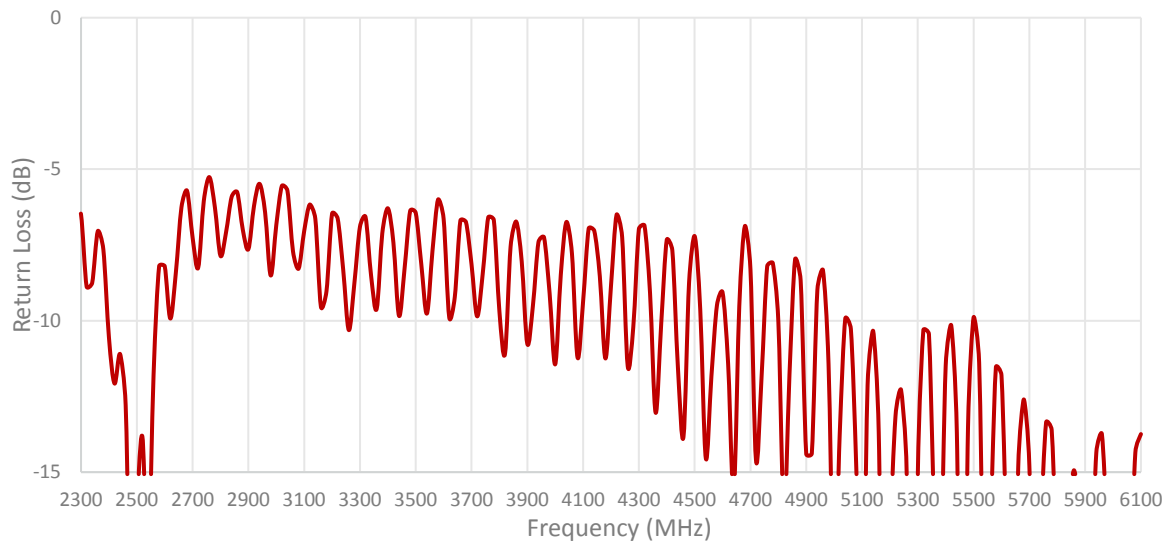

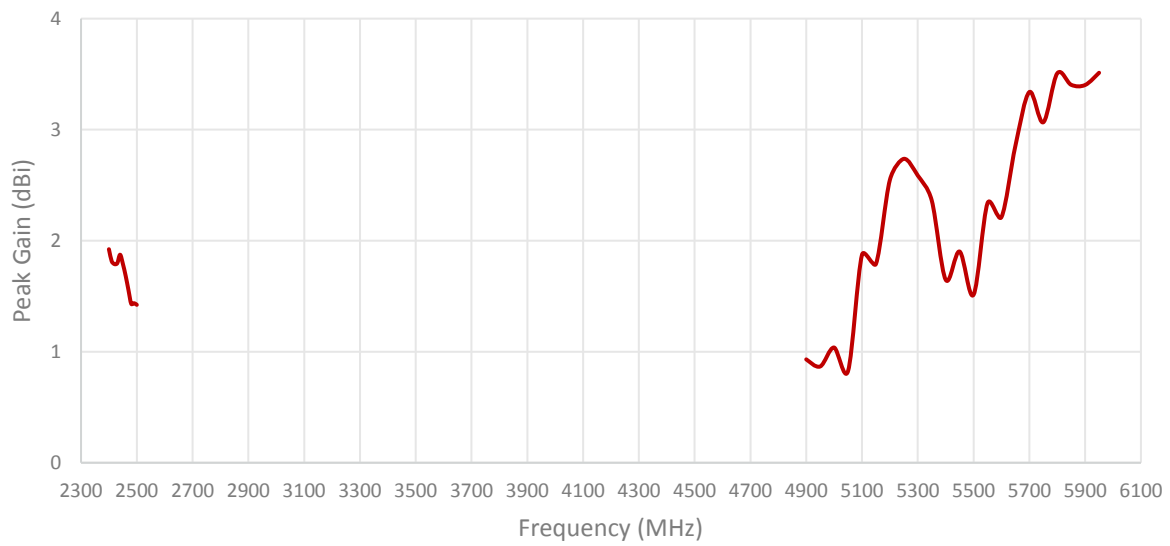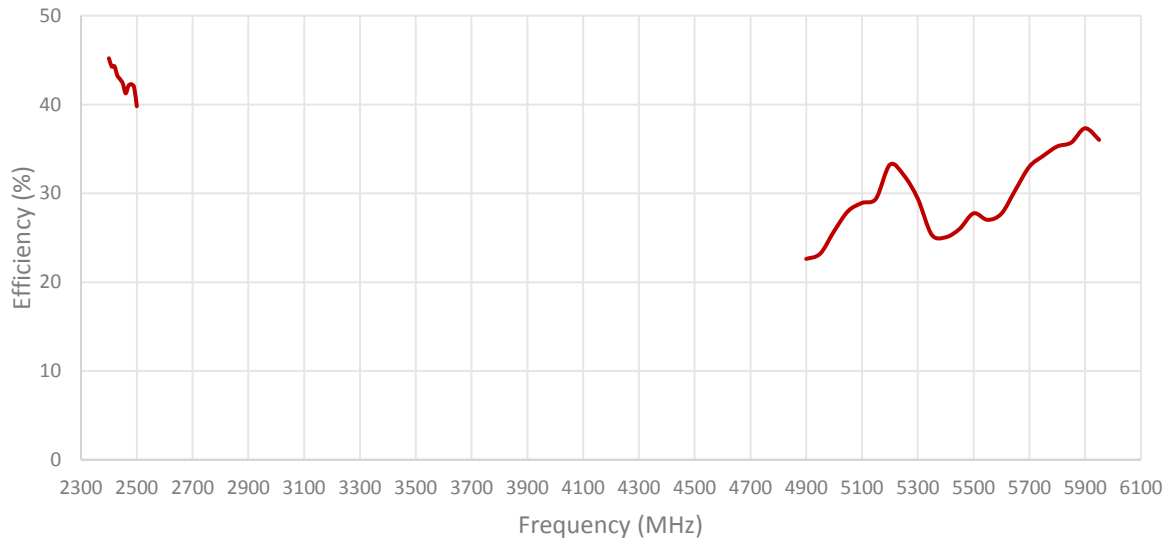

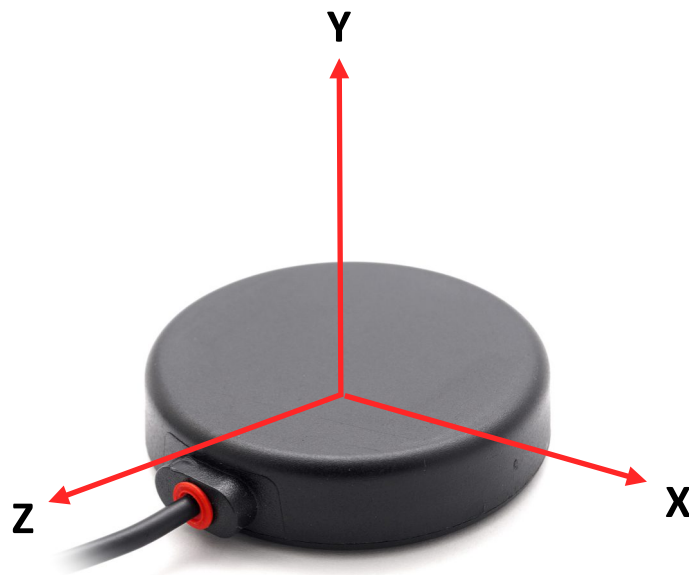
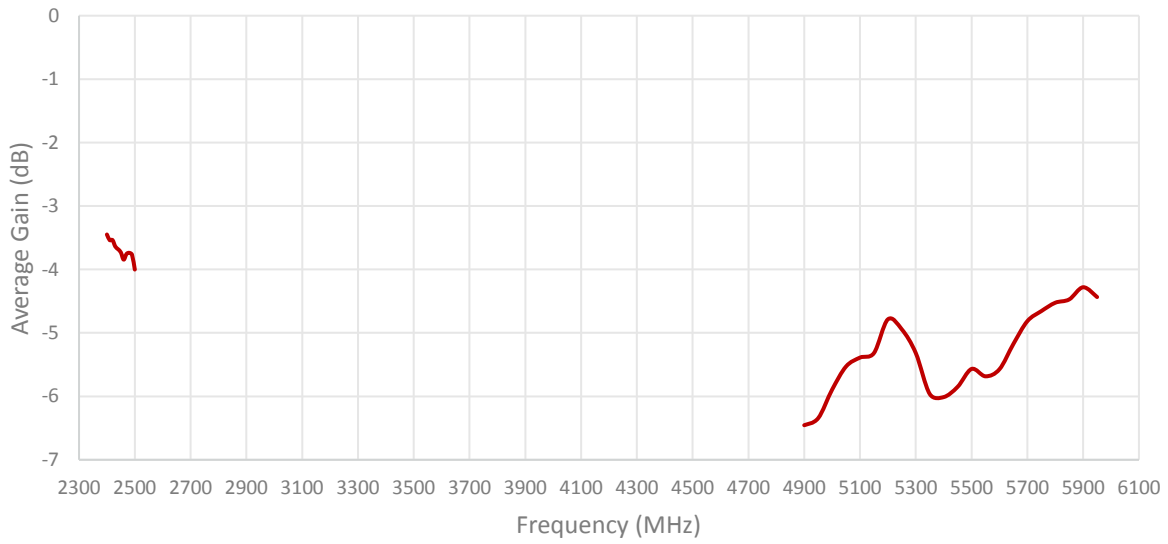


Radiation pattern reference

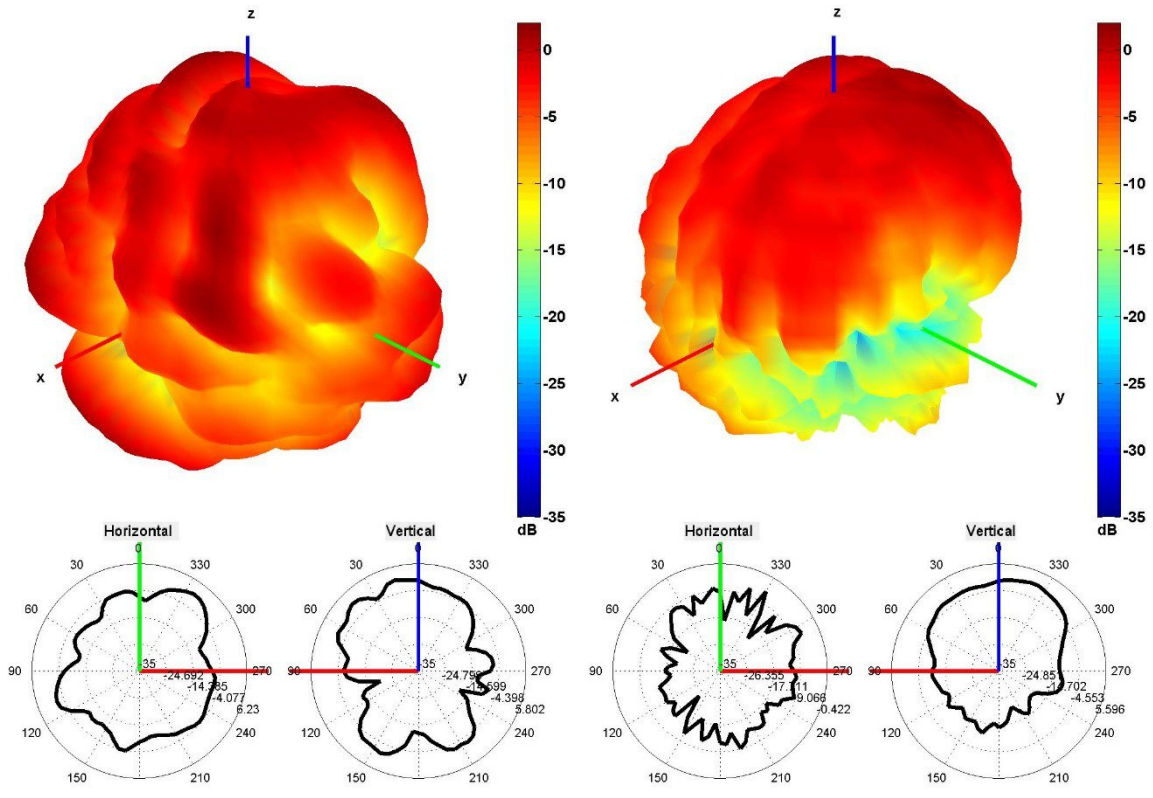

2450 and 5500 MHz Radiation pattern

4. Antenna drawings

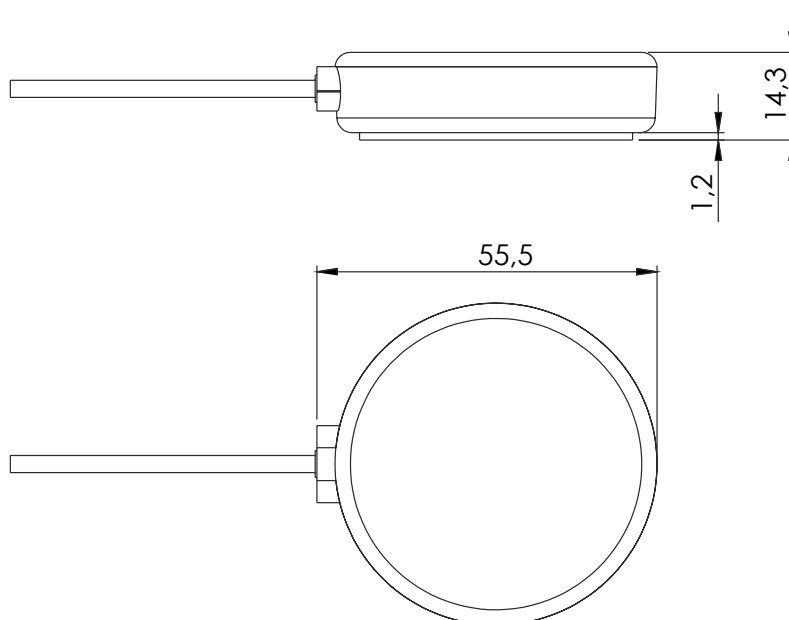

5. Antenna Images

