


<b>TECHNICAL DATA SHEET</b>	code	<b>9501</b>
	version	<b>4</b>
	date	<b>2005-11-03</b>
	page	<b>1/2</b>

**APPLICATION**

Instrumentation and computer cable for EIA RS-232 data transmission applications.

**CONSTRUCTION**

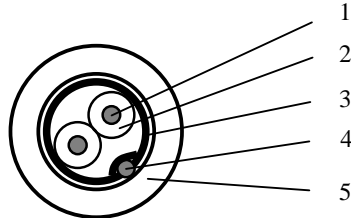


<b>1. Conductor</b>	AWG24 (7xAWG32) tinned Cu
<b>2. Insulation</b>	
Material	PVC
Diameter over insulation	1.12 ± 0.05 mm
Colour of insulation	Black and red
<b>3. Foil (Beldfoil®)</b>	
Material	Aluminium / Polyester
Thickness	9 / 12 µm
<b>4. Drainwire</b>	AWG20 (7xAWG28) tinned Cu
<b>5. Sheath</b>	
Material	PVC
Colour	Chrome 060
Minimum wall thickness	0.61 mm
Minimum average wall thickness	0.762 mm
Nominal diameter over sheath	3.96 mm

**REQUIREMENTS AND TEST METHODS**

**Electrical:**

Nominal resistance conductor	78.7 Ω/km
Nominal resistance shield	59.1 Ω/km
Nominal capacitance conductor to conductor	131.2 pF/m
Nominal capacitance conductor to shield + other cond.	242.8 pF/m
Nominal inductance between conductors	0.62 µH/m
Testvoltage conductor-conductor	2500 VDC, 3 seconds
Testvoltage conductor-screen	2500 VDC, 3 seconds
Voltage rating	300 V RMS
Maximum continuous current per conductor @ 25 °C	2.2 A

 SENDING ALL THE RIGHT SIGNALS	<b>TECHNICAL DATA SHEET</b>	code	<b>9501</b>
		version	<b>4</b>
		date	<b>2005-11-03</b>
	<b>9501</b>	page	<b>2/2</b>

**Mechanical and physical:**

Flame resistance	UL FT4, CSA FT1
Applicable specification	UL type CMG, AWM 2464, CEC C(UL) CMG, AWM I/A
Temperature range processing and operating	-15 to +80 °C
Temperature range storage	-30 to +80 °C
Minimum bending radius	10 x cable diameter
Maximum pulling tension	50 N

\*Nominal values are for information only.

**MARKING**

Colour code 2847: chrome sheath with text ‘BELDEN V 9501 CMG 1PR24 SHIELDED (UL) E108998 OR AWM 2464 OR C(UL) CMG FT4---LL7874 CSA AWM I A 80C 300V FT1’

**PACKAGING**

On non-returnable reels with a length of 31 m (± 0%) or on non-returnable reels with a length of 153 m (± 0%) or on non-returnable reels with a length of 305 m (± 0%) or unreel package with a length of 153 m (± 0%) or unreel package with a length of 305 m (± 0%).

Each reel is labelled with the following data:

Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.