Rating	Input:12V~24V DC 4 LED display. Reverse polarity protection Surge protection up to 400W/35V
Insulation Resistance	DC 500V 100MΩ Min.
Operating Temperature	-20℃~50℃

Mounting Hole



LED Disply	Voltage	12V	24V
40% ON	R	11.2V~11.9V	22.5V~23.7V
60% ON	A	11.7V~12.4V	23.5V~24.7V
80% ON	Y	12.2V~12.8V	24.5V~25.5V
100% ON	G	12.6V~15.9V	25.3V~32.1V

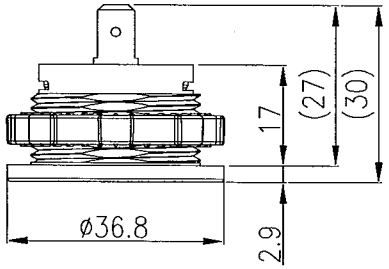



原稿
2016.7.25
研發部







Tolerances ±0.3 Unless Otherwise Specified
White text printing

Date	Name	Description	No.
			△
			△

Drawn	Checked	Approved	SCI BOM No.	1570008	Model Name	DC Voltmeter	
Rock Hsu			Customer No.		Model No.	A25-4-BB3	Rev.
07/22/"16			Unit	mm	© Shin Chin Industrial Co., Ltd.		0