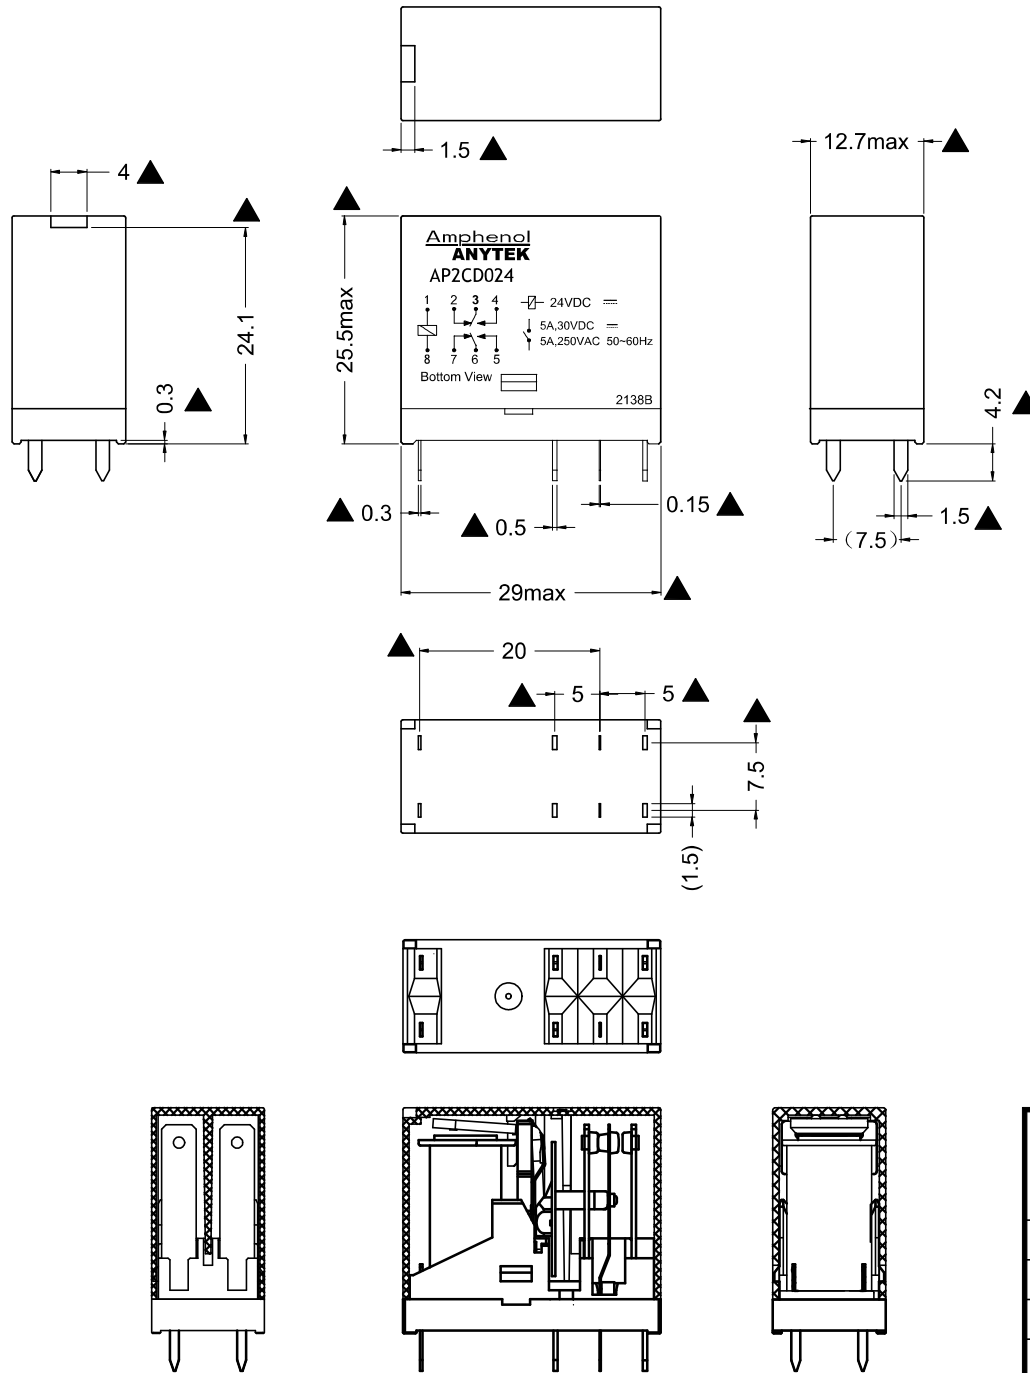






RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A0	—	01/09'22	The first release	PansLee

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



Amphenol <b>ANYTEK</b>				CUSTOMER COPY		
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE		AP-DPDT INDUSTRIAL RELAY				
PART NO.		AP2CXXXX00G		DWG NO.	8AP2C-0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		PansLee 2022.1.09	PansLee 2022.1.09			X ±0.50
						X.X ±0.10
						X.XX ±0.05
						X° ±1°
				SHEET: 01/02	REV.: A0	

RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A0	—	01/09'22	The first release	PansLee

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

线圈参数,在23 °C环境下 Coil parameters (At 23 °C)

线圈规格代码 Coil voltage code	线圈额定电压(V)Rated coil voltage	线圈电阻(Ω)Coil resistance ± 10%	线圈功率 Power Consumption	动作电压 Operate voltage	释放电压 Release voltage	线圈最大电压 Max. allowable voltage
D5	5VDC	47	0.53W	70% Maximum	15% Minimum	170% Maximum
D6	6VDC	68				
D12	12VDC	275				
D24	24VDC	1100				
D36	36VDC	24400				
D48	48VDC	4300				
D110	110VDC	22860				

注Annotation: 交流线圈电源频率50~60Hz. The frequency of AC Coil is 50 ~ 60 Hz.

触点参数

- 触点形式Contact Form: DPDT
- 接触电阻Contact Resistance: 50mΩ,在6VDC@100mA
- 触点材质Contact Material: AgNi
- 阻性负载Resistive load: 5A@30VDC/250VAC ,50~60Hz
- 感性负载: 3A,30VDC,L/R=7ms  
2A,250VAC,cosΦ=0.4
- 电气寿命Electrical Life: 10万次 100,000 operations at Rated Resistive Load.
- 机械寿命Mechanical Life: 3000万次 30,000,000 operations at No Load condition.

综合性能参数

- 绝缘电阻Insulation resistance:1000M Ω @500VDC
- 介电耐压(初始) Dielectric strength (initial) :同极触点间1000VAC,1Min;  
异极触点间3000VAC,1Min;  
线圈触点间5000VAC,1Min  
Between open contact 1000VAC,1Min;  
Between different pole 3000VAC,1Min;  
Between contact and coil 5000VAC,1Min
- 动作时间Operate time: 15ms Max.
- 释放时间Release time: 15ms Max.


使用环境Service environment

- 使用环境温度Ambient temperature: -45~+70度
- 湿度Ambient humidity: 5%-85%
- 抗冲击Shock resistance: 98m/s<sup>2</sup>, 储存980m/s<sup>2</sup>
- 耐振动Vibration resistance: 10-55Hz, 双振幅1.5mm

其它Other

- 底座材质The base material:PBT,黑色 black
- 防尘外壳Dust-proof cover: 透明PC Transparent PC
- 重量Weight: About 17g
- 重點尺寸Critical dimension: ▲

继电器规格号示例Part Number Description:  
AP 2C XXXX 00G



Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	AP-DPDT INDUSTRIAL RELAY						
PART NO.	AP2CXXXX00G			DWG NO.	8AP2C-0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		PansLee 2022.1.09	PansLee 2022.1.09		UNIT: mm	X	±0.50
					SCALE: NONE	X.X	±0.10
					SHEET: 02/02	X.XX	±0.05
				REV.: A0	X*	±1°	