


Cover G-22R

Ref. B17006S, B17006T, B17006C, B17006B

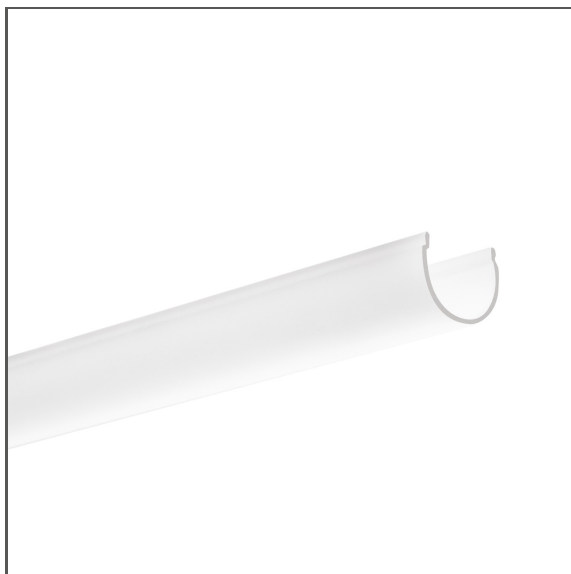

- Resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PMMA
Shape	round
Maximum length on request	6000 mm
Width	24.3 mm
Height	20.5 mm
UV resistance	yes

Finish	Light transmission	Length	High mechanical resistance	Ref
satin	71 %	1000 mm	no	B17006S_1
		2005 mm		B17006S_2
		3010 mm		B17006S_3
semi-transparent	89 %	1000 mm	yes	B17006T_1
		2005 mm		B17006T_2
		3010 mm		B17006T_3
clear	94 %	1000 mm	yes	B17006C_1
		2005 mm		B17006C_2
		3010 mm		B17006C_3
black	20 %	1000 mm	no	B17006B_1
		2005 mm		B17006B_2
		3010 mm		B17006B_3

Cover G-22R

Ref. B17006S, B17006T, B17006C, B17006B

RELATED PROFILES



LESTO
B5551

RELATED PROFILES > ARCHITECTURAL



GIZA
A05556



GIZA-LL
A00758




GIZA-LL-T
A02479



GIZA-LL-UST
A02724N



GLAZA-LL
A02627




KOZEL
A06454



KOZUS
A07823



KOZUS-CR
A00600




LARKO
A05552



LIPOD
A05554



LOC-30
A18015



LOKOM
A05553



OPAC-30
A06164