




DIN 7971 F

~ISO 1481

450 HV

Standard withdrawn

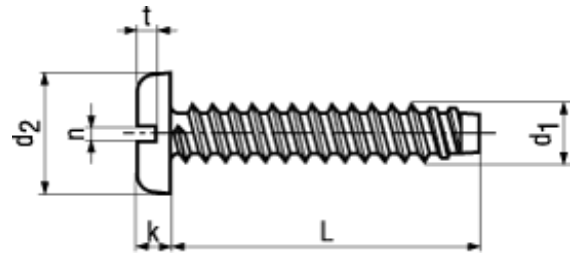

BN 992

Slotted pan head tapping screws

with flat end type F

Steel case-hardened 450 HV

zinc plated blue

- ~UNI 6951 B
- ~ČSN 021232



ISO 4042

Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!
Further notice to residual risks can be found in the introduction section.

Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1374435	ST 2,2	4,2	1,35	0,6	0,55	4,5
1374443						6,5
1374478						9,5
1374486						13
1669648						16
1374494	ST 2,9	5,6	1,75	0,8	0,75	4,5
1374508						6,5
1374516						9,5
1374524						13
1374532						16
1374540						19
1374583	ST 3,5	6,9	2,1	1	0,95	6,5
1374591						9,5
1374605						13
1374613						16
1374621						19
1374664						32
1374680	(ST 3,9)	7,5	2,25	1	1,05	6,5
1374702						9,5
1374710						13
1374729						16
1374796	ST 4,2	8,2	2,45	1,2	1,15	6,5
1374826						9,5
1374834						13
1374842						16
1374850						19

Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1374907	ST 4,8	9,5	2,8	1,2	1,35	6,5
1374915						9,5
1374923						13