


~DIN 7500 M

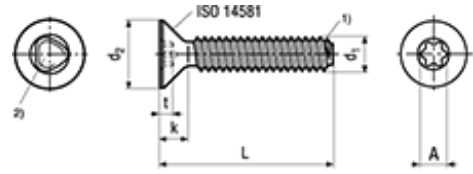


1) Tapered thread end max. 4P 2) Trilobular

BN 13278
Hexalobular (6 Lobe) socket flat countersunk head
~type M, thread forming screws
Stainless steel A2
<ul style="list-style-type: none"> Waxed

i Countersink must be designed according to the corresponding standard! A technical brochure is available on request.

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3061357	M2,5	4,7	1,5	X8	0,79	2,4	5
3061358							6
3061359							8
3061361							10
3061362							12
3061364	M3	5,5	1,65	X10	0,83	2,8	6
3061365							8
3061368							10
3061369							12
3061370							16
3271582							20
3271583							25
3061372	M4	8,4	2,7	X20	1,53	3,95	8
3061375							10
3061376							12
3061377							16
3061378							20
3271584							25
3271585							30
3061379	M5	9,3	2,7	X25	1,51	4,5	10
3061380							12
3061381							16
3061383							20
3271586							25

Article#	d ₁	d _{2 max.}	k max.		t max.	A~	L
3271588	M5	9,3	2,7	X25	1,51	4,5	30
3061385	M6	11,3	3,3	X30	1,78	5,6	10
3061388							12
3061389							16
3061390							20
3061391							25
3271589							30