



FEATURES

- For general AF application.
- Complementary PNP type available BC807.
- High collector current, high current gain.
- Low collector-emitter saturation voltage.



1. BASE
2. EMITTER
3. COLLECTOR



SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		

ORDERING INFORMATION

Type No.	Marking	Package Code
BC817-16	6A	SOT-23
BC817-25	6B•	SOT-23
BC817-40	6C	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	50	V
V _{CEO}	Collector-Emitter Voltage	45	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current -Continuous	500	mA
P _C	Collector Dissipation	300	mW
T _j , T _{stg}	Junction and Storage Temperature	-55 to +150	°C


ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =10μA I _E =0	50			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =10mA I _B =0	45			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =10μA I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =25V I _E =0			0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} =4V I _C =0			0.1	μA
DC current gain	h _{FE}	V _{CE} =1V I _C =100mA	100 160 250		250 400 600	
		V _{CE} =1V I _C =300mA	60 100 170			
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =500mA I _B =50mA			0.7	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =500mA I _B =50mA			1.2	V
Collector capacitance	C _{ob}	V _{CB} =10V, f=1MHz		6		pF
Transition frequency	f _T	V _{CE} =5V I _C =50mA f=100MHz		170		MHz

CLASSIFICATION OF H_{FE(1)}


Rank	BC817-16	BC817-25	BC817-40
Range	100-250	160-400	250-600
Marking	6A	6B•	6C

Total power dissipation $P_{tot} = f(T_S)$

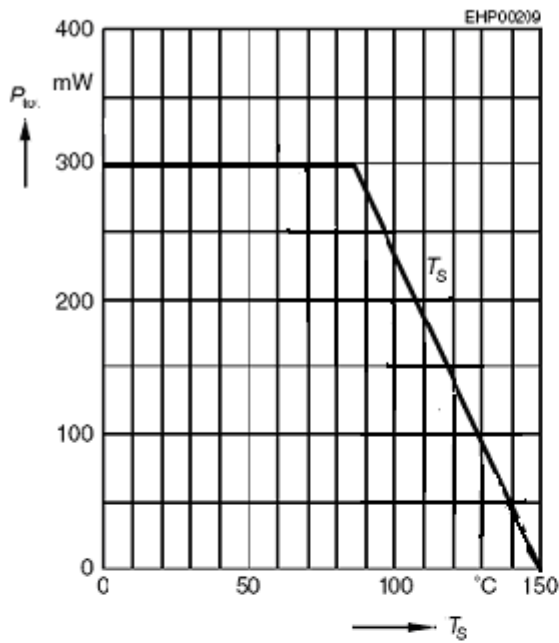


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

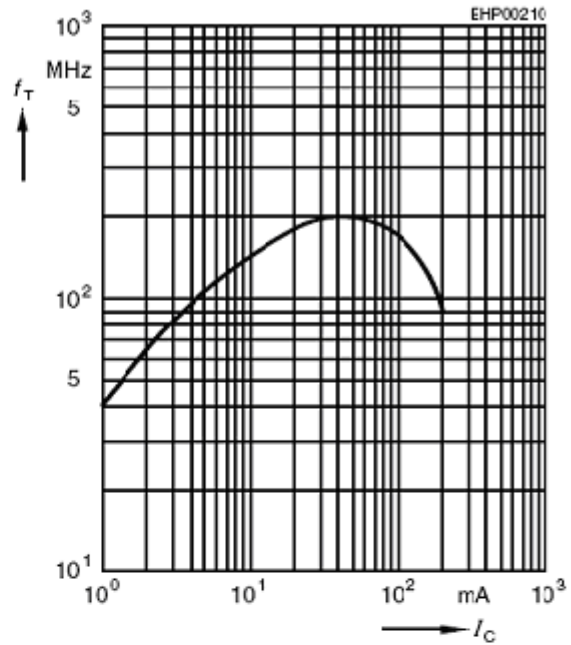


Permissible pulse load

$P_{totmax} / P_{totDC} = f(t_p)$

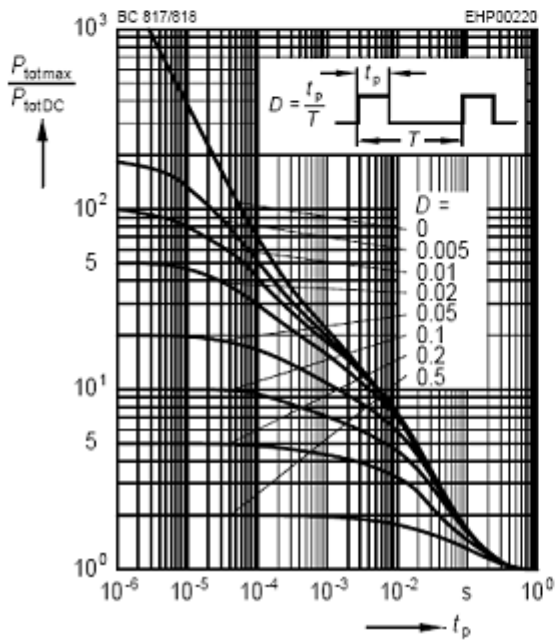


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CBO} = 25V$

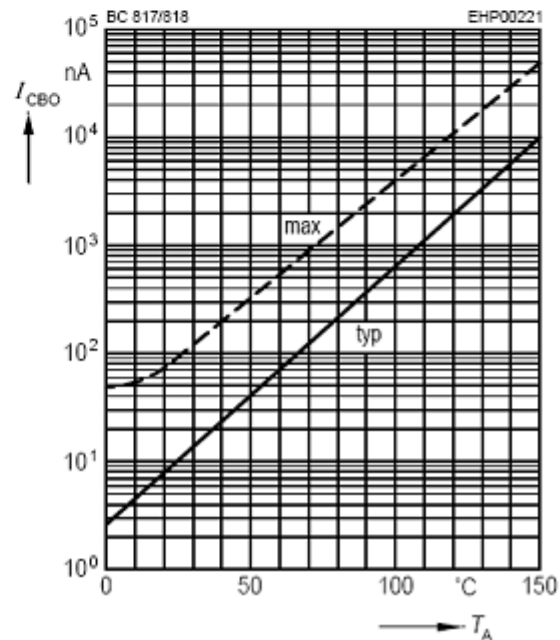


Base-emitter saturation voltage

$$I_C = f(V_{BEsat}), h_{FE} = 10$$

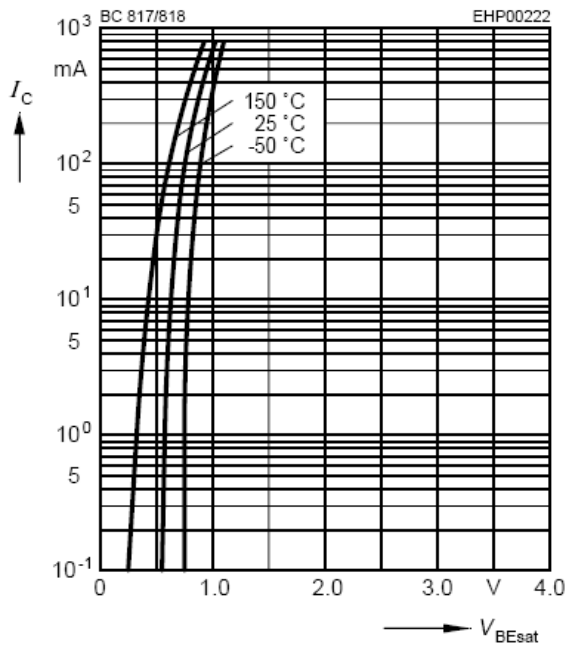


Collector-emitter saturation voltage

$$I_C = f(V_{CEsat}), h_{FE} = 10$$

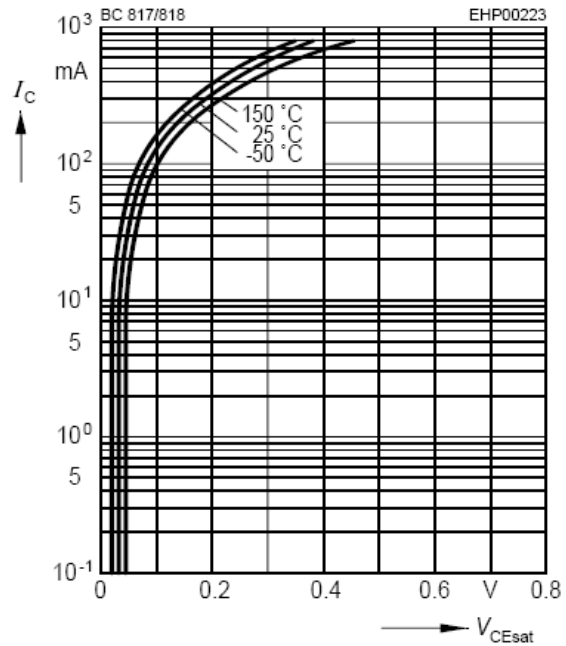

DC current gain $h_{FE} = f(I_C)$

$$V_{CE} = 1V$$

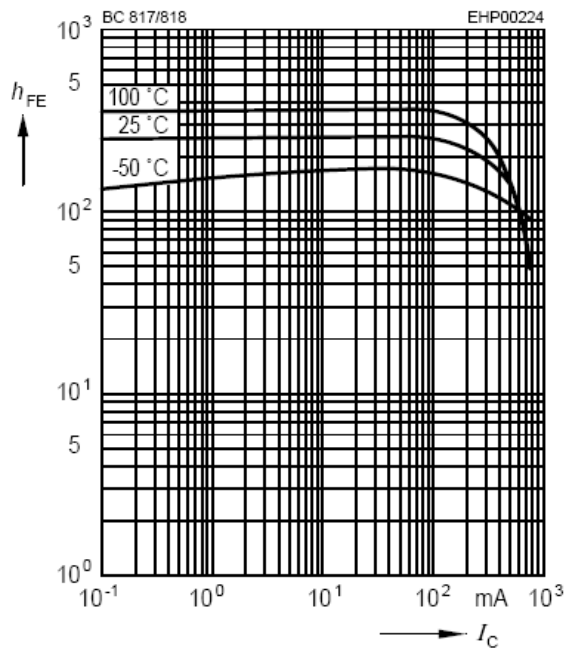

Device	Package	Shipping
BC817-16/-25/-40	SOT-23	3000/Tape&Reel