



| SYM | DESCRIPTION | APPROVED | DATE |
|-----|-------------|----------|------|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |

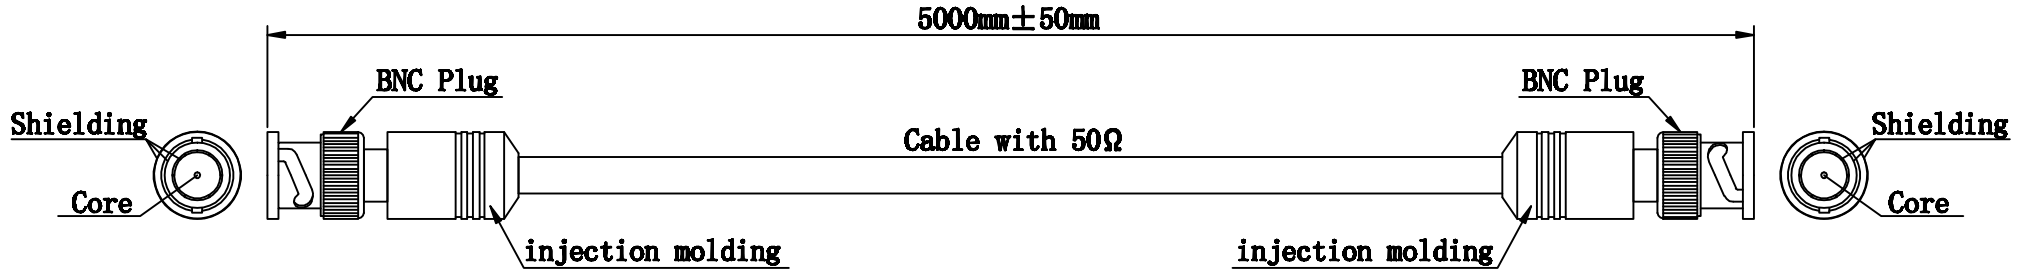

BNC connector cable (RG58), shielded
Connectors: 2x BNC male
Contacts: nickel-plated (gold-plated pins)
Conductor area: 0.636 mm²
AWG: 20
Composition of conductor: 1 x 0.90 mm
Conductor material: CCS
Insulation material: PE
Jacket material: PVC
Conductor resistance: 500 ± 10 Ω/km
Shielding: 35 % coverage
Capacitance: 54 ± 5 pF/m
Cable OD: 5.0 ± 0.2 mm
Weight: 30 ± 2 g/m

| 13 | | | |
|-----|------|-------------|---------|
| 12 | | | |
| 11 | | | |
| 10 | | | |
| 9 | | | |
| 8 | | | |
| 7 | | | |
| 6 | | | |
| 5 | | | |
| 4 | | | |
| 3 | | | |
| 2 | | | |
| 1 | | | |
| SYM | Name | Description | Remarks |

| Tolerance (mm) | | | |
|-------------------------|-------------|-----------------|-------------------|
| Wire harness size L(mm) | Trunk | Protection tube | Positioning space |
| L ≤ 200 | +20 -10 | | ±5 |
| 200 < L ≤ 500 | +25 -10 | | ±5 |
| 500 < L ≤ 1000 | +40 -20 | | ±10 |
| 1000 < L ≤ 2000 | +60 -30 | | ±20 |
| 2000 < L ≤ 3000 | +80 -40 | | ±30 |
| 3000 < L ≤ 5000 | +100 -50 | | ±30 |
| L > 5000 | +150 -80 | | ±40 |



| | | |
|----------|--------------|------------------------------------|
| APPROVED | Shen Juan | |
| CHECKED | Li Jie | |
| DRAWN | Zhang Yining | Customer : _____ Date : 2023-10-19 |
| UNIT | mm | DRAWING NO. BNC-050-5.0 SIZE: A4 |
| REV | 1 | CUSTOMER NO. _____ PAGE: 1/1 |