

6

5

4

3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/17	

D

D

C


C

B

B

A

A

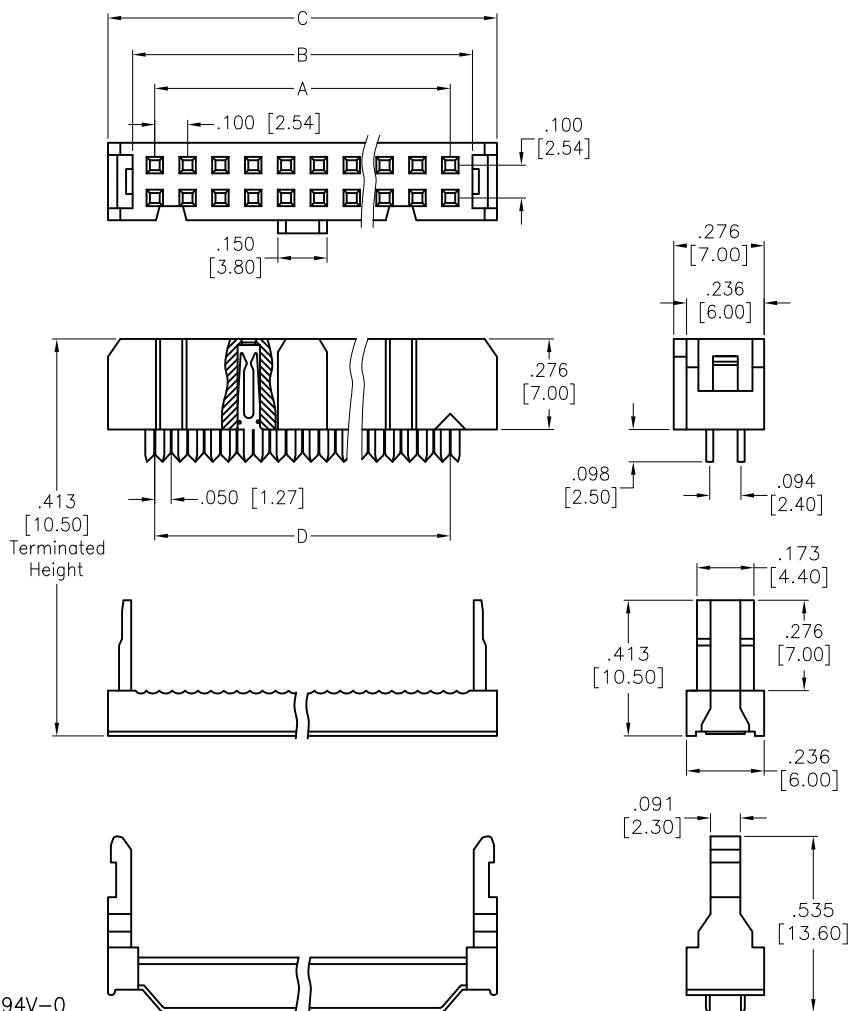

Positions: 06 thru 64  
 A= .100 [2.54] x No. of Spaces  
 B= .100 [2.54] x No. of Positions per Row + .035 [0.90]  
 C= .100 [2.54] x No. of Positions per Row + .185 [4.70]  
 D= .100 [2.54] x No. of Positions per Row - .050 [1.27]

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate on contact area,  
 Tin over Nickel underplate on IDC tails  
 Electrical:  
 Current rating: 3 Amp  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 500 VAC  
 Temperature Rating:  
 -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	∅X ± .10	TITLE .100 [2.54] FLAT CABLE IDC SOCKET DUAL WIPE CONTACTS, W/FSR	
.XX ± .020	∅XX ± .015		
.XXX ± .015	∅XXX ± .010	REV. -	
APPROVALS		DATE	REF: S00111C
DRAWN	HR	6/22/17	SCALE: NTS
CHECKED	MY	6/22/17	SHEET 1 OF 1
APPROVED			

6

5

4

3

2

1