

### **RONDA-REC-60-C**

~ $60 \hat{A}^\circ$  +  $60 \hat{A}^\circ$  rectangular beam with holder C compatible with LEDiL HEKLA

#### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 53.9 mm

Height 16.6 mm

Fastening socket

Colour clear

Box size

Box weight 0 kg

Quantity in Box 420 pcs


ROHS compliant yes 1




#### **MATERIAL SPECIFICATIONS:**

Component	Туре	Material	Colour
RONDA-REC-60	Single lens	PMMA	clear
RONDA-HLD-C	Holder	PC	clear



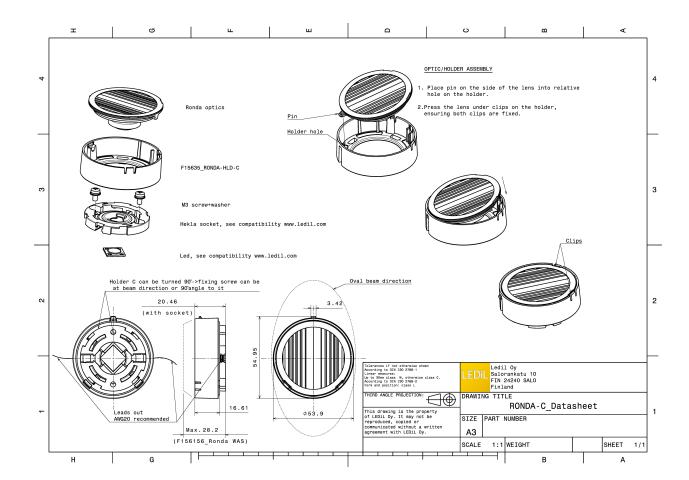

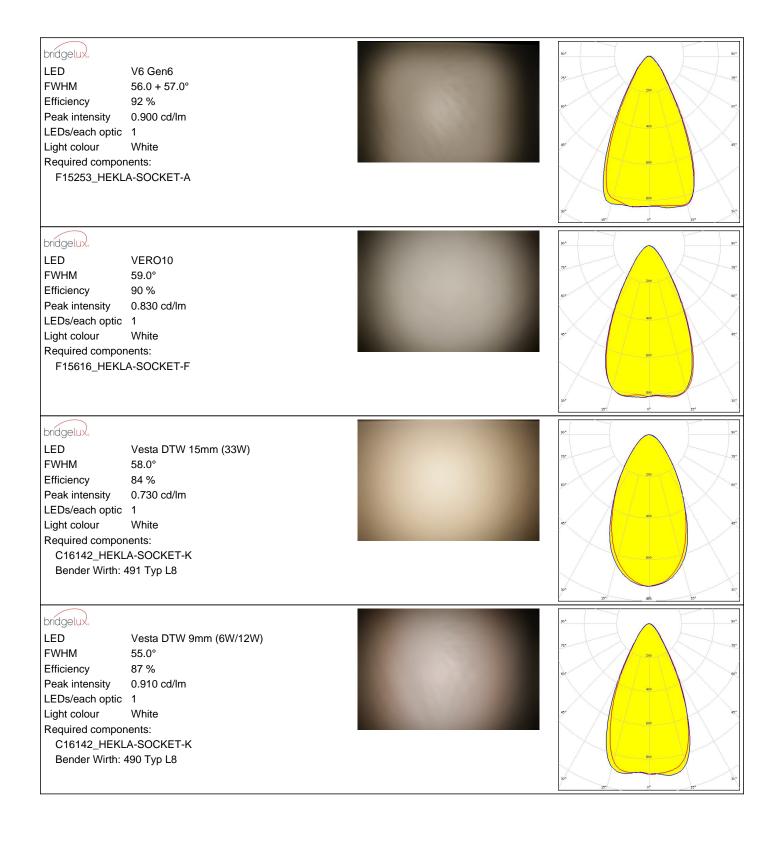

## PHOTOMETRIC DATA (MEASURED):




LED Vesta TW 13mm (25W)

**FWHM** 56.0° 85 % Efficiency Peak intensity 0.810 cd/lm LEDs/each optic 1 Light colour White

Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 492 Typ L8





#### bridgelux.


LED Vesta TW 9mm (12W)

**FWHM** 55.0° 87 % Efficiency Peak intensity 0.900 cd/lm

LEDs/each optic 1 Light colour White Required components:

C16142\_HEKLA-SOCKET-K






## **CITIZEN**

LED CLC020 Series (Dim-To-Warm)

**FWHM** 53.0° Efficiency 86 % Peak intensity 0.960 cd/lm

LEDs/each optic 1 Light colour White Required components: C16142\_HEKLA-SOCKET-K




## **CITIZEN**

LED CLL02x/CLU02x (LES10)

**FWHM** 58.0° Efficiency 89 % 0.850 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components: F15255\_HEKLA-SOCKET-C



## PHOTOMETRIC DATA (MEASURED):

## **CITIZEN**


LED CLU LES 4.2mm (HI-Ver.3)

**FWHM** 55.0° Efficiency 90 % Peak intensity 0.930 cd/lm LEDs/each optic 1

Light colour White Required components:

F15255\_HEKLA-SOCKET-C






## **CITIZEN**

LED CLU700/701 **FWHM**  $55.0 + 56.0^{\circ}$ 90 % Efficiency Peak intensity 0.910 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255\_HEKLA-SOCKET-C






## **CITIZEN**

LED LCN-C01B (Tunable White)

**FWHM** 54.0° Efficiency 86 % Peak intensity 0.900 cd/lm LEDs/each optic 1

Light colour White Required components: C16142\_HEKLA-SOCKET-K Bender Wirth: 481 Typ L8






## CREE &


LED CMA1516 **FWHM** 61.0° Efficiency 92 % 0.820 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components:


F15256\_HEKLA-SOCKET-D






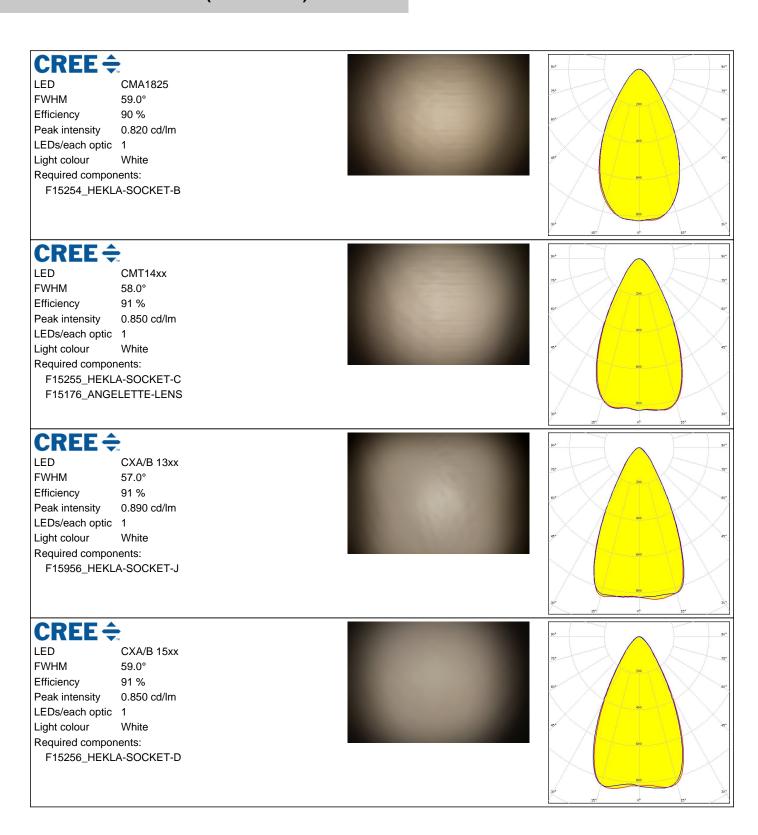



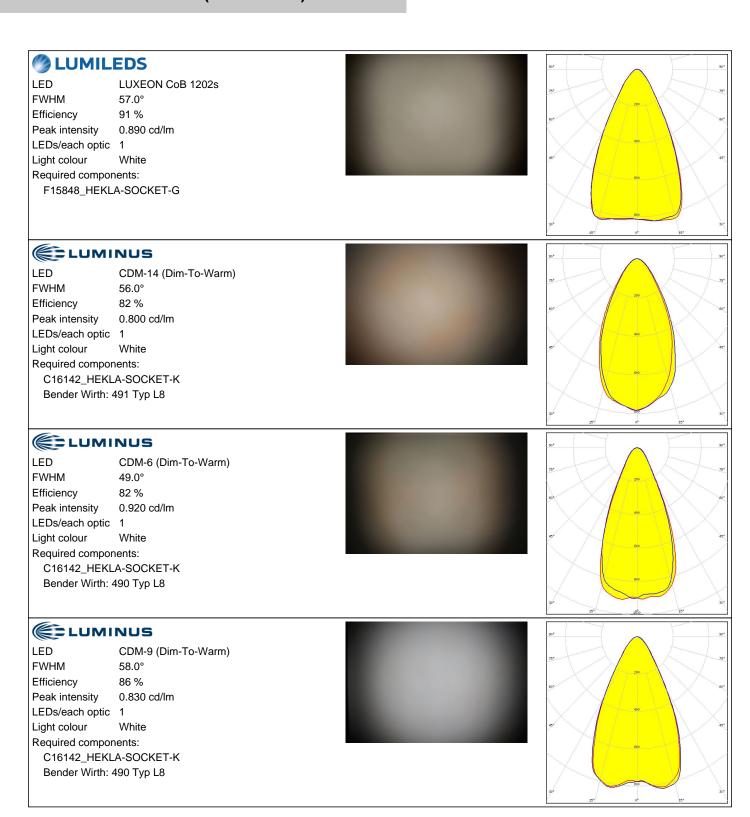

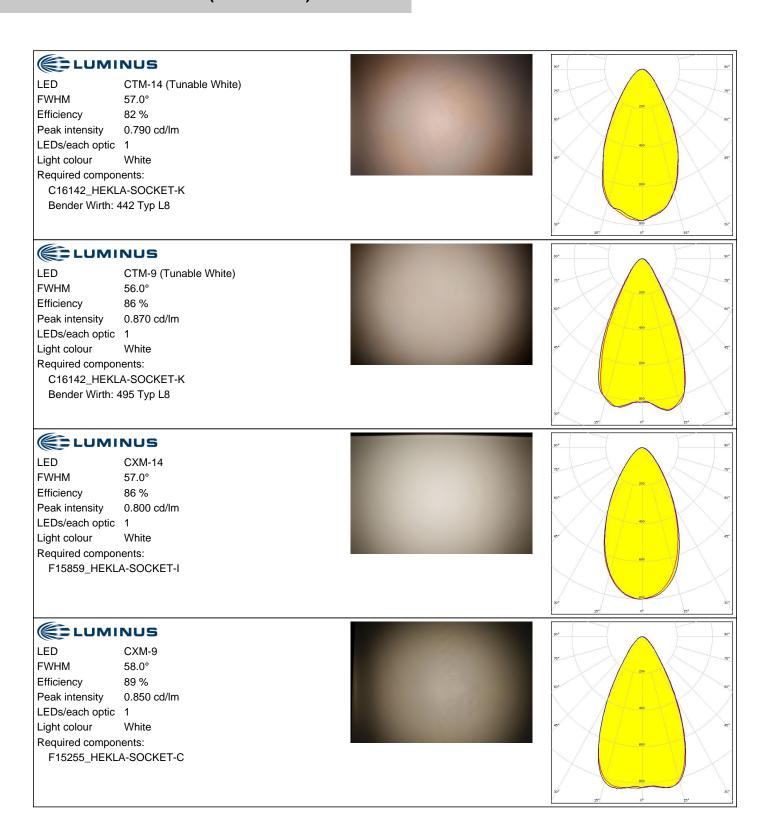

### PHOTOMETRIC DATA (MEASURED):


#### **WNICHIA**

LED NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM 56.0°
Efficiency 83 %
Peak intensity 0.850 cd/lm
LEDs/each optic 1

Light colour White
Required components:
C16142\_HEKLA-SOCKET-K
Bender Wirth: 497 Typ L8






#### **WNICHIA**

LED NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM 55.0°
Efficiency 86 %
Peak intensity 0.870 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142\_HEKLA-SOCKET-K Bender Wirth: 498 Typ L8






## **SAMSUNG**

LED COB D Series LES 14.5 mm

FWHM  $59.0 + 58.0^{\circ}$  Efficiency 86 % Peak intensity 0.760 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859\_HEKLA-SOCKET-I






## **SAMSUNG**

LED COB D Series LES 9.8 mm

FWHM 58.0°
Efficiency 90 %
Peak intensity 0.860 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15255\_HEKLA-SOCKET-C

•



#### PHOTOMETRIC DATA (MEASURED):

## **SAMSUNG**


LED LC010C FWHM 58.0° Efficiency 90 %

Peak intensity 0.860 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15848\_HEKLA-SOCKET-G





## **SAMSUNG**

 LED
 LC010C G2

 FWHM
 55.0°


 Efficiency
 89 %

 Peak intensity
 0.930 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255\_HEKLA-SOCKET-C






## SAMSUNG

LED LC020C FWHM 59.0° Efficiency 90 % Peak intensity 0.840 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15848\_HEKLA-SOCKET-G





## **TRIDONIC**


LED SLE G7 LES09

FWHM 58.0° Efficiency 90 % Peak intensity 0.920 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255\_HEKLA-SOCKET-C





#### PHOTOMETRIC DATA (MEASURED):


## **TRIDONIC**

LED SLE G7 LES13

FWHM 57.0°
Efficiency 87 %
Peak intensity 0.840 cd/lm
LEDs/each optic 1

Light colour White
Required components:
F15859\_HEKLA-SOCKET-I






## **TRIDONIC**

LED SLE G7 LES15

FWHM 58.0°
Efficiency 87 %
Peak intensity 0.800 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859\_HEKLA-SOCKET-I






## **XICATO**


LED XTM - 19mm LES

FWHM 62.0° Efficiency 86 % Peak intensity 0.670 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C16058\_XTM-ADAPTER-50-C








## PHOTOMETRIC DATA (SIMULATED):

#### **WNICHIA**

LED COB T-Type **FWHM** 54.0° Efficiency 86 % Peak intensity 0.950 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15848\_HEKLA-SOCKET-G




## **TRIDONIC**

LED SLE G6 LES10

**FWHM** 54.0° Efficiency 93 % Peak intensity 1.000 cd/lm

LEDs/each optic 1 White Light colour Required components:

F15255\_HEKLA-SOCKET-C





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy