



Revision:	Changes:	Date:
1.0	Initial Case	2019.04.16

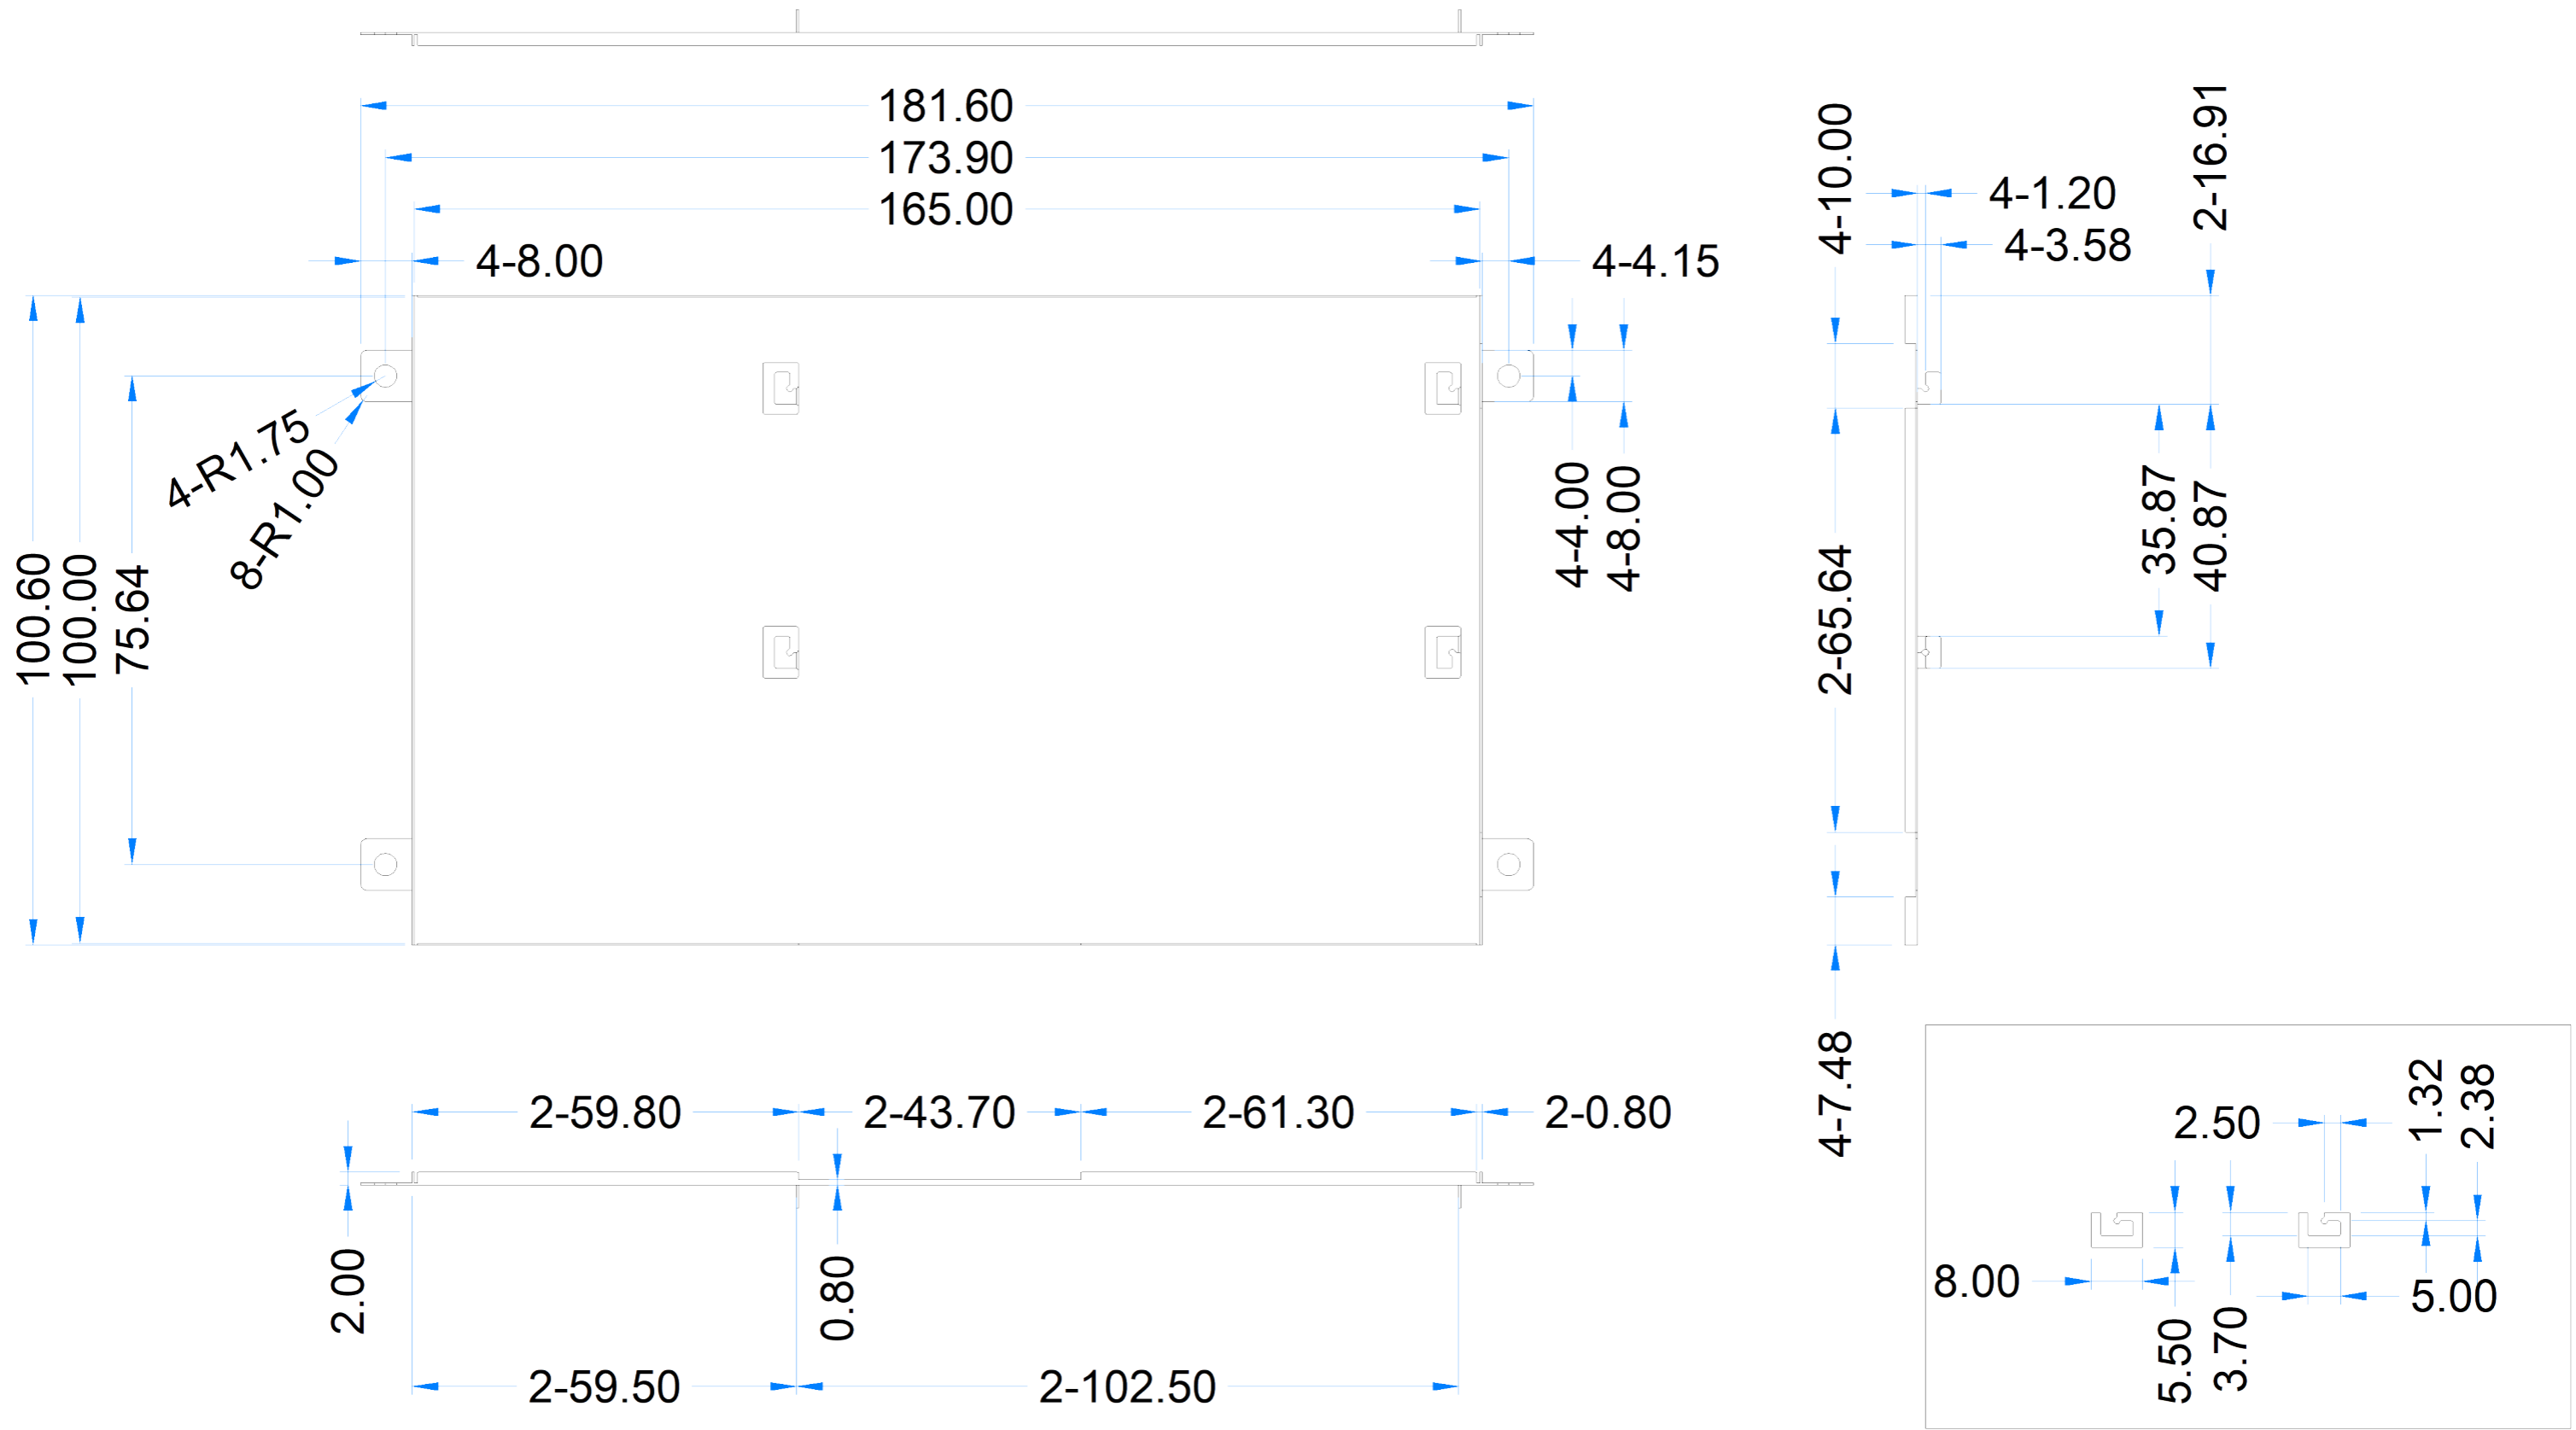

GENERAL NOTES:

1. By default the hooks are flat, if necessary customer can bend them,
2. Stainless steel thickness: 0.3mm,
3. General tolerance: $\pm 0.2\text{mm}$.
4. Please consider fact, that according to our needs, montage holes' locations and frame outline's dimensions must be permanent,
5. Mated to:

PN: FR7.0A00		
SN: ####		
DRAWN: PM	4/16/2019	1:2.00
CHECKED:		[mm]
APPR:		ISO A3
		P. 1 of 1