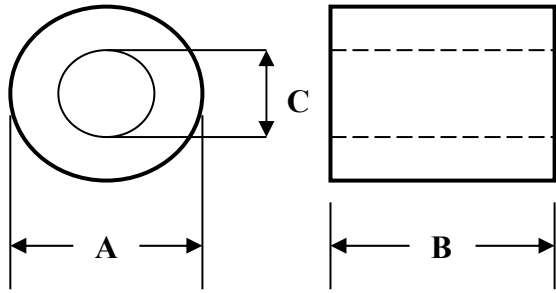


# SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : HTJ 50Z8Z20				FWG.NO :	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm)  				A	3.5 ± 0.15 m/m
				B	6.0 ± 0.30 m/m
				C	0.8 ± 0.15 m/m
				D	m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
				(2)ELECTRICAL REQUIREMENTS	
Z	MIN 50 OHM	TEST FREQ	25 MHz		
Z	MIN 80 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
TEST INSTRUMENTS					
HP-4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏	
CORE	FRH3.5X6X0.8				
WIRE	φ 0.65×63mm			CHECKED BY 張明德	
WINDING	1 TS			DRAWN BY Vicky	

# TEST DATA

CUSTOMER :					DATE :				
PART NO : FRH3.5X6X0.8					DWG.NO : CT2221612K5A				
CUSTOMER PART NO :					CUST.DWG.NO :				
IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25 MHz	100 MHz			A	B	C		
SPEC	MIN 50 OHM	MIN 80 OHM			3.5 ± 0.15	6.0 ± 0.30	0.8 ± 0.15		
1	64	97			3.53	6.06	0.87		
2	64	97			3.51	6.10	0.84		
3	65	97			3.50	6.09	0.85		
4	65	98			3.51	6.09	0.86		
5	65	98			3.52	6.08	0.85		
6	64	97			3.52	6.05	0.87		
7	64	97			3.51	6.07	0.87		
8	65	98			3.50	6.07	0.85		
9	65	98			3.51	6.08	0.86		
X 10	64	97			3.52	6.09	0.88		
----	65	97			3.51	6.08	0.86		
R	1	1			0.03	0.05	0.04		
REMARK: 產品不能有明顯缺陷、污損；產品缺口長、寬在 0.3mm 以下， 深在 0.3mm 以下。					APPROVED BY				
					吳載敏				
					CHECKED BY				
					張明德				
					DRAWN BY				
					Vicky				

# FRH3.5X6X0.8

