# Spring-loaded test probe

## GKS-113 204 180 A 1502 M

Item GKS-113-0022






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





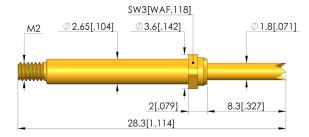



5 A

<30 mOhm

### **General** data

Product group: Sub-product group: Series: Grid: Contacting from: Magnetic:

Installation type: Quick-exchange system: Adjustable installation height: Non-rotating:

Screw-in torque: Compatible receptacle(s): Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-113 M screw-in 4 mm [157 mil] Pad, pin, posts Yes Screw-in

Yes No 10 - 20 cNm [.885 - 1.77 lbf·in]

KS-113 M - 40 °C [- 104 °F] + 80 °C [+ 176 °F] RoHS-3;6a;6c **Electrical data** 

Current load capacity / rated current: Typical resistance (Ri):

Mechanical data

Total length: 28.3 mm [1.11 in] Barrel diameter: 2.65 mm [.104 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.5 N [1.79 ozf] Collar height: 02 Spring force at working stroke: 1.5 N [5.39 ozf] Recommended working stroke: 4 mm [.157 in]

Tip style data

04 4-point crown Tip style: Tip diameter: 1.8 mm [.070 in] Tip style surface: A gold Tip style material: 2 steel


# **SCREW-IN TEST PROBE**

# Spring-loaded test probe GKS-113 204 180 A 1502 M

Item GKS-113-0022





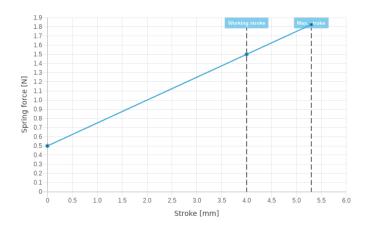

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

