

## IB090102

### INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, 40x8x8mm, Flush, Sn: 1.5, 10-30V DC, PNP NO, Cable 10m PVC, IP67, Brass Nickel-plated



#### MECHANICAL FEATURES

Active area material of sensor	PA 6.1 GF15
Ambient temperature	-25 °C ... 70 °C
Cable infeed	Axial
Cable length	10 m
Degree of protection (IP)	IP67
Design	Cuboid
Housing coating	Nickel-plated
Housing material	Brass
Material of cable sheath	PVC
Max. tightening torque	1 Nm
Mechanical mounting condition for sensor	Flush
Number of cores	3
Pressure-proof	-
Sensor height	40 mm
Sensor length	8 mm
Sensor width	8 mm

#### ELECTRICAL FEATURES

Cascadable	-
Hysteresis	5 %
No-load current	10 mA
Rated switching current	200 mA
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	1.5 mm
Switching frequency	1000 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC

## ELECTRICAL FEATURES

With LED display	+
With monitoring function of downstream devices	-


## Other

Packaging dimensions	76.0mm x 50mm x 121.0mm
Shipping weight	
Tariff code	85365019


## Classification

ipf product group	215
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

## Connection

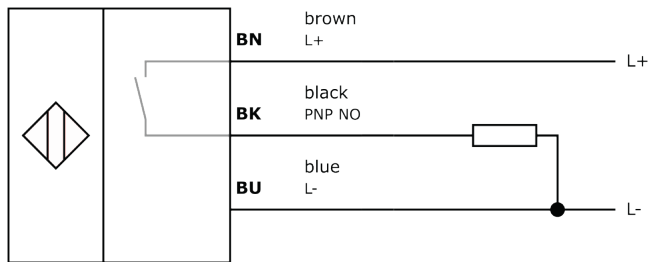

## Dimensional drawing

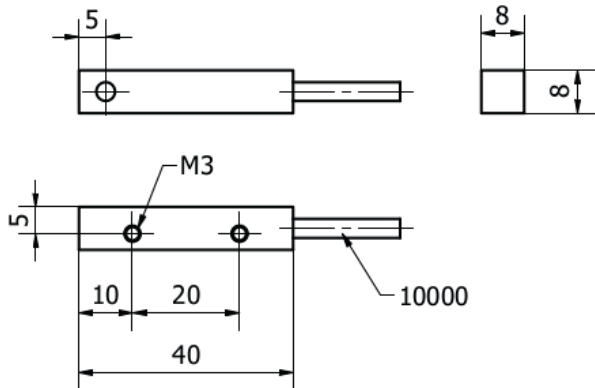

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

