


## IR Gesture 3 Click

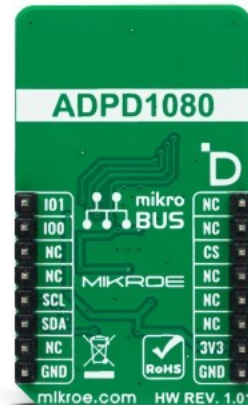

PID: MIKROE-5742

**IR Gesture 3 Click** is a compact add-on board that provides contactless gesture recognition. This board features the [ADPD1080](#), a photometric front-end from [Analog Devices](#). The IR Gesture 3 Click allows gesture recognition in two dimensions, with a built-in optical filter and a sharp visible light cutoff. It eliminates the need for external lenses and preserves the dynamic range of the sensor when placed under sunlight or indoor lighting. It does not require a precise alignment because its sensor maintains a linear response within the  $\pm 35^\circ$  angular field of view. This Click board™ makes the perfect solution for the development of various gesture sensing applications, from hand swipe gestures (left, right, up, down, wave), air click, and flicks to multizone proximity detection.

IR Gesture 3 Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## Specifications

| Type             | Motion  |
|------------------|---|
| Applications     | Can be used for the development of various gesture-sensing applications, from hand swipe gestures (left, right, up, down, wave), air click, and flicks to multizone proximity detection             |
| On-board modules | ADPD1080, - a photometric front end from Analog Devices ADPD2140 - an infrared light angle sensor from Analog Devices SFH4249 - a high-power infrared emitter from ams OSRAM                        |
| Key Features     | Flexible gesture-sensing solution, low power consumption, supports swiping, waving, and proximity, detects a gesture under direct sunlight, and even when exposed to bright ambient light, and more |
| Interface        | I2C   |
| ClickID          | Yes   |
| Compatibility    | mikroBUS  |
| Click board size | M (42.9 x 25.4 mm)  |
| Input Voltage    | 3.3V  |

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

## Downloads

[IR Gesture 3 click example on Libstock](#)

[ADPD1080 datasheet](#)

[ADPD2140 datasheet](#)

[SFH 4249 datasheet](#)

[BH18PB1WHFV datasheet](#)

[IR Gesture 3 click 2D and 3D files](#)

[IR Gesture 3 click schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).