


■ Dimensions

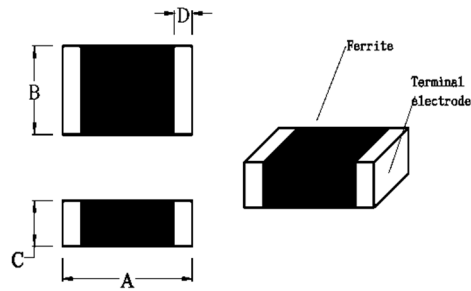


mm

No	Part No.	A	B	C	D
1	JCB 060303 (0201)	0.6 ± 0.03	0.3 ± 0.03	0.3 ± 0.03	0.1 ~ 0.2.
2	JCB 100505 (0402)	1.0 ± 0.1	0.5 ± 0.1	0.5 ± 0.1	0.1 Min.
3	JCB 160808 (0603)	1.6 ± 0.2	0.8 ± 0.2	0.8 ± 0.2	0.3 ± 0.2
4	JCB 201209 (0805)	2.0 ± 0.2	1.2 ± 0.2	0.9 ± 0.2	0.5 ± 0.3
5	JCB 321611 (1206)	3.2 ± 0.2	1.6 ± 0.2	1.1 ± 0.2	0.5 ± 0.3
6	JCB 322513 (1210)	3.2 ± 0.2	2.5 ± 0.2	1.3 ± 0.2	0.5 ± 0.3
7	JCB 451616 (1806)	4.5 ± 0.2	1.6 ± 0.2	1.6 ± 0.2	0.5 ± 0.3
8	JCB 453215 (1812)	4.5 ± 0.2	3.2 ± 0.2	1.5 ± 0.2	0.5 ± 0.3

■ Part Number System

JCB 100505 (□) - 300 (/ □)

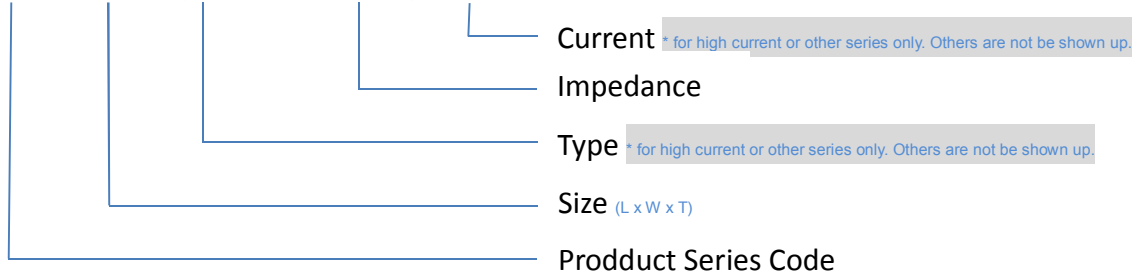

■ PACKAGE

Type	JCB 060303	JCB 100505	JCB 160808	JCB 201209
QTY/Reel	15,000	10,000	4,000	4,000
Type	JCB 321611	JCB 322513	JCB 451616	JCB 453215
QTY/Reel	3,000	2,000	2,000	1,000



Multilayer Chip Beads

JCB series

Standard JCB series

No.	Part No.	Impedance (Ω)	Test Frequency (MHz)	RDC (Ω)	IDC (mA)
1	JCB 060303-100	10 \pm 25%	100	0.10	500
2	JCB 060303-300	30 \pm 25%	100	0.30	300
3	JCB 060303-600	60 \pm 25%	100	0.35	300
4	JCB 060303-121	120 \pm 25%	100	0.45	200
5	JCB 060303-221	220 \pm 25%	100	0.75	200
6	JCB 060303-241	240 \pm 25%	100	0.80	200
7	JCB 060303-301	300 \pm 25%	100	0.90	150
8	JCB 060303-331	330 \pm 25%	100	0.90	150
9	JCB 060303-471	470 \pm 25%	100	1.50	100
10	JCB 060303-601	600 \pm 25%	100	1.50	100
11	JCB100505-300	30 \pm 25%	100	0.30	500
12	JCB100505-600	60 \pm 25%	100	0.40	200
13	JCB100505-121	120 \pm 25%	100	0.50	200
14	JCB100505-221	220 \pm 25%	100	0.70	100
15	JCB100505-301	300 \pm 25%	100	0.80	100
16	JCB100505-601	600 \pm 25%	100	1.10	50
17	JCB160808-090	9 \pm 25%	100	0.20	500
18	JCB160808-300	30 \pm 25%	100	0.20	400
19	JCB160808-600	60 \pm 25%	100	0.20	300
20	JCB160808-800	80 \pm 25%	100	0.20	300
21	JCB160808-121	120 \pm 25%	100	0.20	200
22	JCB160808-221	220 \pm 25%	100	0.20	200
23	JCB160808-301	300 \pm 25%	100	0.35	200
24	JCB160808-451	450 \pm 25%	100	0.40	200
25	JCB160808-601	600 \pm 25%	100	0.45	200
26	JCB160808-102	1000 \pm 25%	100	0.60	100
27	JCB201209-110	11 \pm 25%	100	0.15	600
28	JCB201209-300	30 \pm 25%	100	0.10	300
29	JCB201209-800	80 \pm 25%	100	0.15	300
30	JCB201209-121	120 \pm 25%	100	0.25	300
31	JCB201209-151	150 \pm 25%	100	0.25	300
32	JCB201209-221	220 \pm 25%	100	0.30	200
33	JCB201209-301	300 \pm 25%	100	0.30	200
34	JCB201209-601	600 \pm 25%	100	0.35	200
35	JCB201209-102	1000 \pm 25%	100	0.45	200
36	JCB321611-310	31 \pm 25%	100	0.20	500
37	JCB321611-600	60 \pm 25%	100	0.30	400
38	JCB321611-900	90 \pm 25%	100	0.30	300
39	JCB321611-151	150 \pm 25%	100	0.30	300
40	JCB321611-301	300 \pm 25%	100	0.30	300
41	JCB321611-601	600 \pm 25%	100	0.30	200
42	JCB321611-102	1000 \pm 25%	50	0.35	350
43	JCB321611-202	2000 \pm 25%	30	0.60	100
44	JCB322513-600	60 \pm 25%	100	0.30	400
45	JCB322513-900	90 \pm 25%	100	0.30	300
46	JCB451616-800	80 \pm 25%	100	0.30	400
47	JCB453215-131	130 \pm 25%	100	0.30	300

For other specification, please contact JANTEK.



High current JCB series

No.	Part No.	Impedance	Test Frequency	RDC	IDC
		(Ω)	(MHz)	(Ω)	(mA)
1	JCB 100505A-100/2	10 ± 25%	100	0.030	2000
2	JCB 100505A-300/3	30 ± 25%	100	0.030	3000
3	JCB 100505A-121/1.2	120 ± 25%	100	0.090	1200
4	JCB 100505A-121/2	120 ± 25%	100	0.055	2000
5	JCB160808A-600/3	60 ± 25%	100	0.040	3000
6	JCB160808A-121/2.5	120 ± 25%	100	0.100	2500
7	JCB160808A-301/2	300 ± 25%	100	0.150	2000
8	JCB160808A-601/1	600 ± 25%	100	0.300	1000
9	JCB201209A-300/3	30 ± 25%	100	0.030	3000
10	JCB201209A-600/3	60 ± 25%	100	0.040	3000
11	JCB201209A-800/3	80 ± 25%	100	0.040	3000
12	JCB201209A-121/3	120 ± 25%	100	0.060	3000
13	JCB201209A-221/2	220 ± 25%	100	0.100	2000
14	JCB201209A-301/2	300 ± 25%	100	0.100	2000
15	JCB201209A-601/2	600 ± 25%	100	0.150	2000
16	JCB321611A-310/6	31 ± 25%	100	0.010	6000
17	JCB321611A-500/3	50 ± 25%	100	0.030	3000
18	JCB321611A-800/3	80 ± 25%	100	0.050	3000
19	JCB321611A-121/3	120 ± 25%	100	0.080	3000
20	JCB321611A-301/2.5	300 ± 25%	100	0.080	2500
21	JCB321611A-601/2	600 ± 25%	100	0.100	2000
22	JCB322513A-300/3	30 ± 25%	100	0.050	3000
23	JCB322513A-600/3	60 ± 25%	100	0.050	3000
24	JCB451616A-600/6	60 ± 25%	100	0.010	6000
25	JCB451616A-750/3	75 ± 25%	100	0.025	3000
26	JCB451616A-800/3	80 ± 25%	100	0.050	3000
27	JCB453215A-700/6	70 ± 25%	100	0.030	6000

For other specification, please contact JANTEK.

