


LED strip K-0530-HD-24V

Ref. K-0530-HD-24V

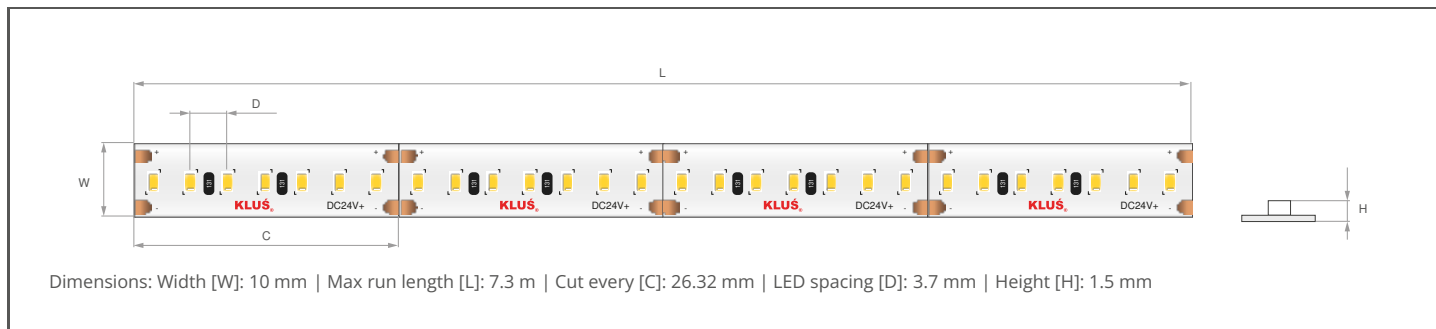

- UL Listed certification
- CRI 90+
- 2-Step MacAdam's ellipse, single binning

TECHNICAL SPECIFICATIONS

IP protection rating	20	Color temperature	Lumen output	Efficiency	Ref
CRI	90	■ 2700 K	357 lm/m	67 lm/W	K-27-0530-HD-24V
Only valid for white	yes	■ 3000 K	368 lm/m	69 lm/W	K-30-0530-HD-24V
Working temperature from	-20°C	■ 3500 K	399 lm/m	75 lm/W	K-35-0530-HD-24V
Working temperature up to	60°C	■ 4000 K	399 lm/m	75 lm/W	K-40-0530-HD-24V
Input voltage	24 V DC	■ 5000 K	420 lm/m	79 lm/W	K-50-0530-HD-24V
Power consumption	5.3 W/m				
Beam angle	120°				
MacAdam's ellipse	2 SDMC				
Number of LEDs per 1 m	266				
Number of LEDs per cut section	7 pcs				
Energy consumption	6 kWh/1000h				
Does not contain mercury and lead	yes				
Dimmable	yes				
No UV IR radiation	yes				