


# LED strip K3-2880-24

Ref. K3-2880-24



Dimensions: Width [W]: 22 mm | Max run length [L]: 5.5 m | Cut every [C]: 28.57 mm | LED spacing [D]: 7.14 mm | Height [H]: 1.8 mm

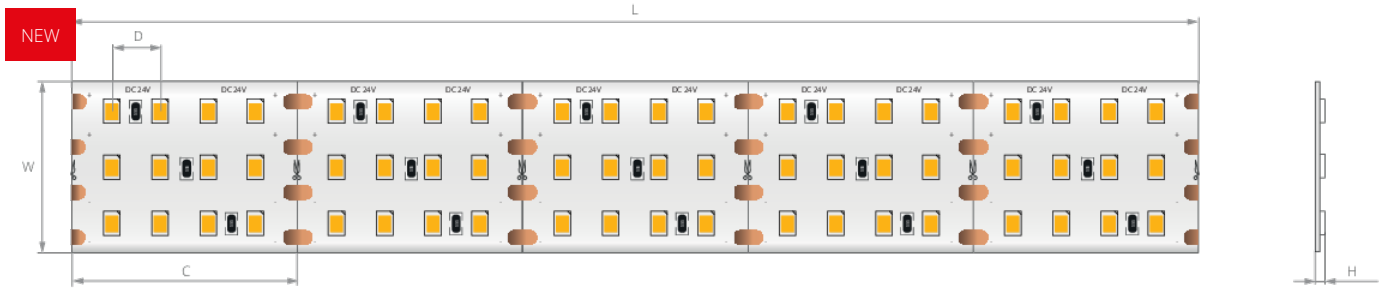

- Quick installation of the light source in the lighting fixture
- Cutting points at very short intervals and a large number of diodes
- High luminous flux 4600 lm/m with low power consumption
- High lighting efficacy
- Excellent color rendering CRI 90+ and full dimming control

## TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
LxBy	L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	28.8 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Length [L]	4000 mm
Number of LEDs per 1 m	420
Number of LEDs per cut section	11 pcs
Energy consumption	29 kWh/1000h
Warranty [months]	84

Color temperature	Lumen output	Efficiency	Ref
2700 K	4030 lm/m	139 lm/W	K3-27-2880-24
3000 K	4175 lm/m	144 lm/W	K3-30-2880-24
3500 K	4320 lm/m	150 lm/W	K3-35-2880-24
4000 K	4600 lm/m	159 lm/W	K3-40-2880-24
5000 K	4600 lm/m	159 lm/W	K3-50-2880-24