


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Contact Composition

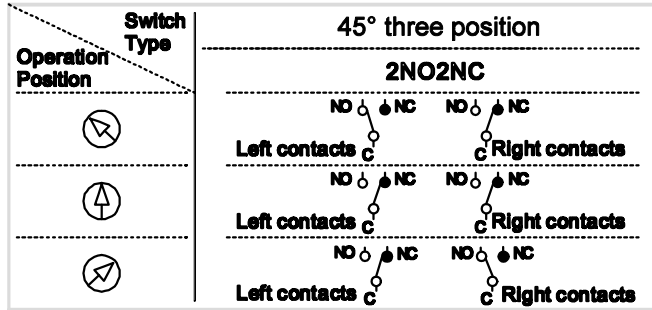

Part Number: LAS1-AF-□Y/◇◆●/◎

"□"	Contact structure
22	2NO 2NC

"◇"	Operation position
3	Three Position \downarrow L C R

"◆"	Operation type
1	Maintain \downarrow L C R
3	Return \downarrow L C R

"●"	Key-lock maintain position
A	\downarrow L C R
B	\downarrow L C R
C	\downarrow L C R
D	\downarrow L C R
E	\downarrow L C R
G	\downarrow L C R
H	\downarrow L C R

"◎"	IP class
No Letter	IP40
P	IP65

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: ≥200,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥100MΩ.
- 6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.IP Class: IP40,IP65(Maintain can made to order).
- 9.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Body: PC.
- 3.Base: PBT.

BRAND 品牌 ONPOW THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	USED 用途 APPD 审核 CH 2019/06/10
	FINISH 处理 CHKD 校对 NCH 2019/06/10
SCALE 比例 1.4 : 1 UNIT 单位 mm	DR. 制图 ZPD 2019/06/10
DIMENSIONS 0.00 TO 18.00mm ±0.43mm 18.01 TO 30.00mm ±0.52mm 30.01 TO 50.00mm ±0.62mm 50.01 TO 80.00mm ±0.74mm	TOLERANCE ±0.43mm ±0.52mm ±0.62mm ±0.74mm
TITLE 名称 LAS1-A Series Pushbutton Switches	
DWG NO. 图号 LAS1-AF-Y三位置	
FILE NAME 档案名称 LAS1-A-Y.DWG	
SHEET 张 1 / 1	REV. 更改 1