




| | | |
|-------------|--------------------|---------------|
| FOR 客户名称 | APPROVED 客户确认签字 | ATTN 销售负责人 |
| | | |

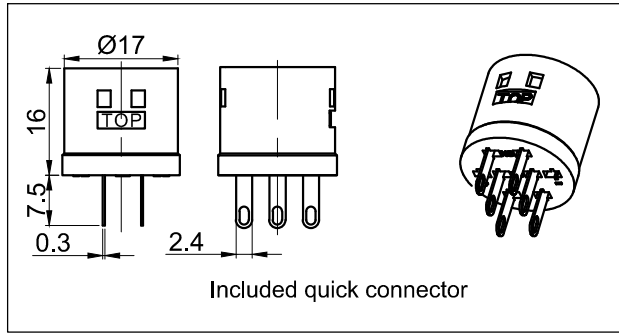

ring (red) → ring (Green)

Contact Composition

| Operation Position | Switch Type | 90° Two Position | |
|--------------------|-------------|-------------------|--------------------|
| | | 1NO1NC | 2NO2NC |
| ⊗ | ⊗ | NO ♂ NC ♀ Left | NO ♂ NC ♀ Right |
| ⊙ | ⊙ | NO ♂ NC ♀ Left | NO ♂ NC ♀ Right |

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: ≥200,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.Torque: About 0.8Nm max.applied to nut.
- 9.IP Class: IP40,IP65(Maintain can made to order).
- 10.Terminal Type: Pin Terminal(2.4 x 0.3mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Head: Stainless Steel.
- 3.Body: Stainless Steel.
- 4.Base: PBT、PA.

Part Number:LAS1-AGQ30-□Y/2●/RG/▲

| "□" | Contact structure | "●" | Operation type | "▲" | Lamp Voltage |
|------------------------------------|-------------------|-----|----------------|------|--------------|
| 11 | 1NO 1NC | 1 | Maintain | 6V | DC 6V |
| 22 | 2NO 2NC | 3 | Return | 12V | DC 12V |
| | | | | 24V | DC 24V |
| | | | | 110V | DC 110V |
| | | | | 220V | DC 220V |
| Other voltage can be made to order | | | | | |

| | | | | | |
|--------------------------|--|----------------|------------|-----------------------------------|---------------|
| BRAND 品牌 ONPOW | 红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. | | | | |
| | USED 用途 | | APPD 审核 | | CH 2020/04/30 |
| FINISH 处理 | | CHKD 校对 | | NCH 2020/04/30 | |
| SCALE 比例 | | 0.9 / 1 | UNIT 单位 | mm | |
| DR. 制图 | | ZPD 2020/04/30 | | | |
| DIMENSIONS | | TOLERANCE | | TITLE 名称 | |
| 0.00 TO 18.00mm | | ±0.43mm | | GQ Series Anti-vandal push button | |
| 18.01 TO 30.00mm | | ±0.52mm | | DWG NO. 图号 | |
| 30.01 TO 50.00mm | | ±0.62mm | | LAS1-AGQ30-Y二位置 | |
| 50.01 TO 80.00mm | | ±0.74mm | | SIZE 图纸 | |
| FILE NAME 档案名称 | | SHEET 张 | | REV. 更改 | |
| LAS1-AGQ30.DWG | | 1 / 1 | | 1 | |