


PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Contact Composition

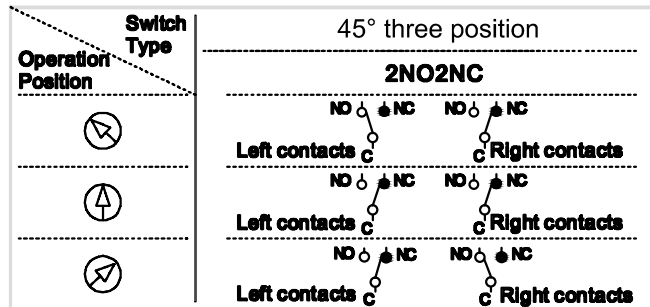

Part Number: LAS1-AJ-□X/◇◆/△/◎

□	Contact structure
22	2NO 2NC

◇	Operation position
3	Three Position $\begin{matrix} L \\ C \\ R \end{matrix}$

△	Cap Color
R	Red
G	Green
Y	Yellow

◎	IP class
No Letter	IP40
P	IP65

◆	Operation type
1	Maintain $\begin{matrix} L \\ C \\ R \end{matrix}$
3	Return $\begin{matrix} L \\ C \\ R \end{matrix}$

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: $\geq 200,000$ cycles.
- 3.Electrical Life: $\geq 50,000$ cycles.
- 4.Contact Resistance: $\leq 50m\Omega$.
- 5.Insulation Resistance: $\geq 100M\Omega$.
- 6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: $-25^{\circ}C \sim +55^{\circ}C$ (No Freezing).
- 8.IP Class: IP40,IP65(Maintain can made to order).
- 9.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Head: PC.
- 3.Body: PC.
- 4.Base: PBT.

BRAND 品牌 ONPOW		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核 CH 2019/06/10
		FINISH 处理	CHKD 校对 NCH 2019/06/10
		SCALE 比例 1.4 : 1	UNIT 单位 mm
		DR. 制图 ZPD 2019/06/10	
DIMENSIONS		TOLERANCE	
0.00 TO 18.00mm		$\pm 0.43mm$	
18.01 TO 30.00mm		$\pm 0.52mm$	
30.01 TO 50.00mm		$\pm 0.62mm$	
50.01 TO 80.00mm		$\pm 0.74mm$	
TITLE 名称		LAS1-A Series selector switch	
DWG NO. 图号		LAS1-AJ-X三位置	
FILE NAME 档案名称		LAS1-A-X.DWG	
SHEET 张		1 / 1	
REV. 更改		1	