


PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Contact Composition

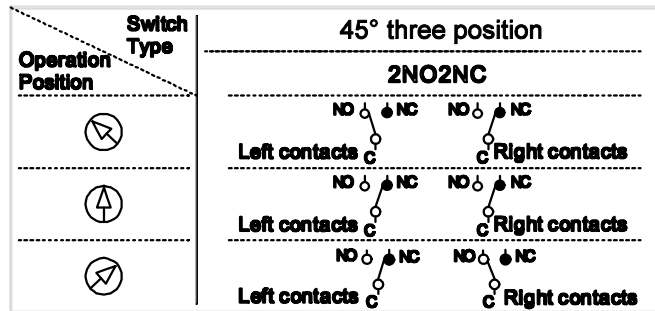

Part Number: LAS1-AY-□Y/◇◆●/◎

"□"	Contact structure
22	2NO 2NC

"◇"	Operation position
3	Three Position

"◆"	Operation type
1	Maintain
3	Return

"●"	Key-lock maintain position
A	
B	
C	
D	
E	
G	
H	

"◎"	IP class
No Letter	IP40
P	IP65

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: ≥200,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥100MΩ.
- 6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.IP Class: IP40,IP65(Maintain can made to order).
- 9.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Body: PC.
- 3.Base: PBT.

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
	USED 用途 FINISH 处理 SCALE 比例 1.4 : 1 UNIT 单位 mm	APPD 审核 CH 2019/06/10 CHKD 校对 NCH 2019/06/10 DR. 制图 ZPD 2019/06/10
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	TITLE 名称 LAS1-A Series Pushbutton Switches DWG NO. 图号 LAS1-AY-Y三位置 FILE NAME 档案名称 LAS1-A-Y.DWG	SIZE 图纸 A4 SHEET 张 1 / 1 REV. 更改 1