

LCU85E061Ap

LCU85xx SERIES LASER DIODE



■ Features

1. Peak wavelength at 25°C : 850 nm (typical)
2. Standard light output : 500mW (CW)
3. TO-18 (ϕ 5.6mm) Packaged, cap window with flat Pb-free lens, monitor PD inside.
4. Small perpendicular divergence angle

■ Applications

1. Motion sensor
2. 3D depth sensor
3. Illumination
4. Industry
5. Medical application

■ External dimensions(Unit : mm)

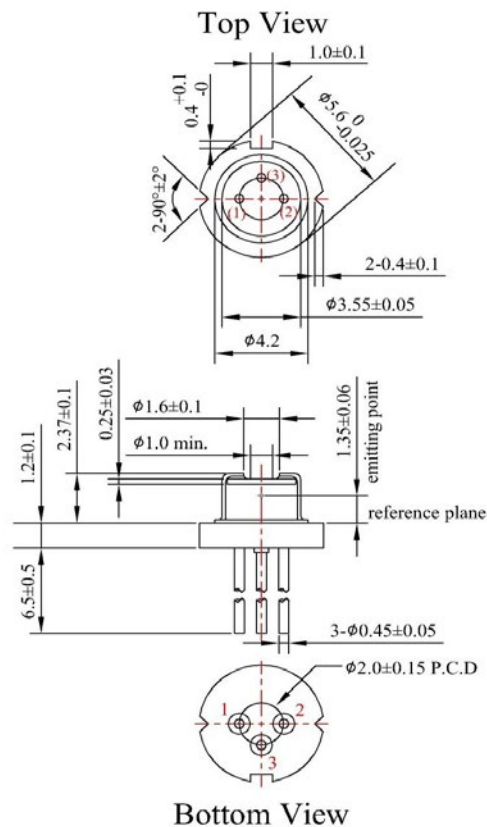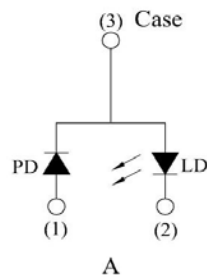

Ver.A

LCU85E061Ap

LCU85xx SERIES LASER DIODE

Absolute Maximum Ratings(Tc=25°C)

Parameter	Symbol	Rating	Unit
Optical Output	Po	500	mW
Reverse Voltage	Vr	2	V
Operating Temperature (Case)	Top	-10~+60	°C
Storage Temperature	Tstg	-40~+85	°C

Electrical and Optical Characteristics(Tc=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	
Threshold Current	I _{th}	Po=500mW	-	160	180	mA	
Operating Current	I _{op}	Po=500mW	-	680	720	mA	
Operating Voltage	V _{op}	Po=500mW	-	1.9	2.2	V	
Slope Efficiency	η	Po=125-375mW	-	0.95	-	mW/mA	
Monitor Current	I _m	Po=500mW	0.6	1.0	-	mA	
Beam Divergence (FWHM)	Parallel	θ_{\parallel}	Po=500mW	-	8	13	deg.
	Perpendicular	θ_{\perp}	Po=500mW	-	18	23	deg.
Lasing Wavelength	λ	Po=500mW	840	850	860	nm	


© θ_{\parallel} and θ_{\perp} are defined as the angle within which the intensity is 50% of the peak value.

Quality Notice

This device is still under product development.

Typical characteristic curves

Optical Output Power v.s. Forward Current

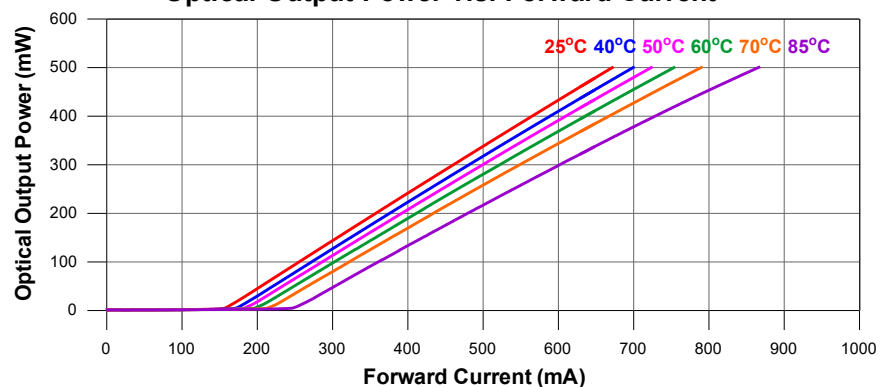


Ver.A


LCU85E061Ap

LCU85xx SERIES LASER DIODE


Forward Voltage v.s. Forward Current

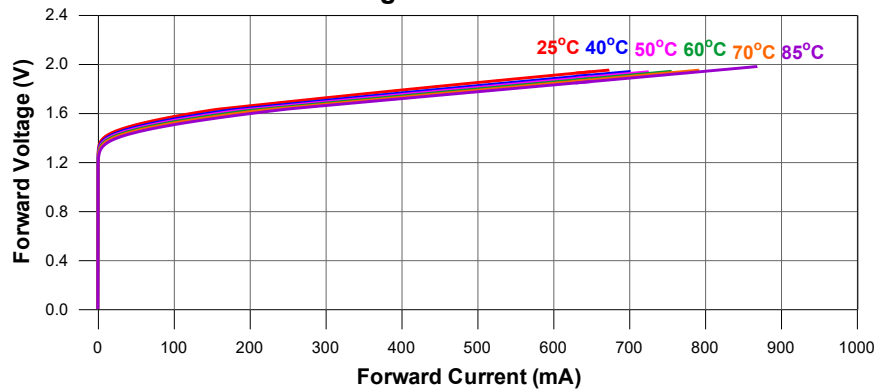

Peak Wavelength v.s. Case Temperature

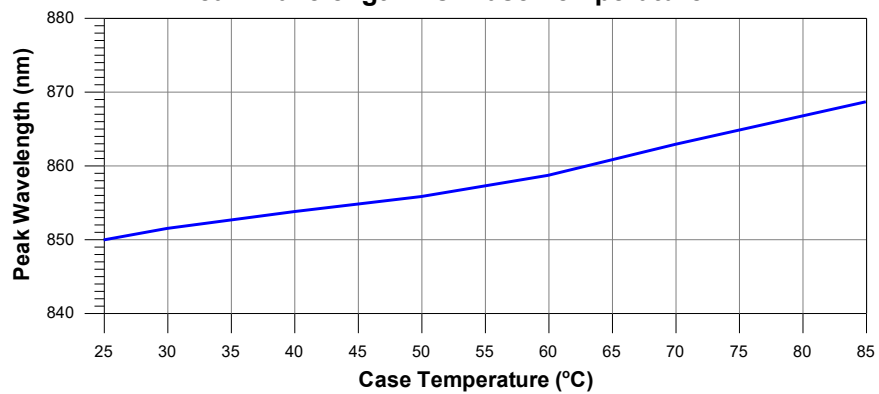

Far-Field Pattern

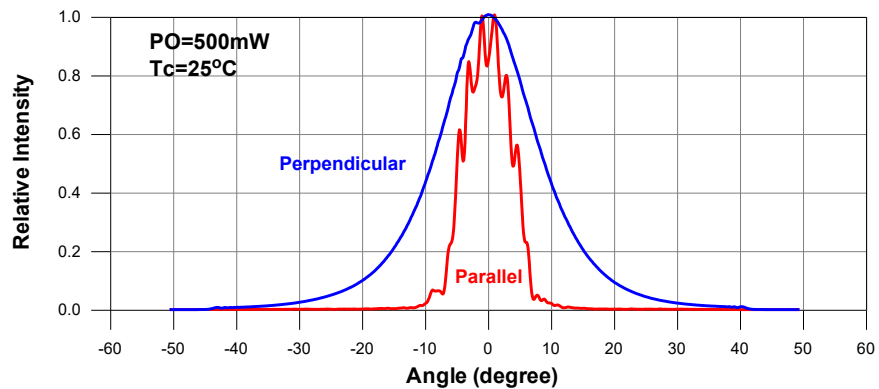


Ver.A


LCU85E061Ap

LCU85xx SERIES LASER DIODE


Monitor Current v.s. Optical Output Power

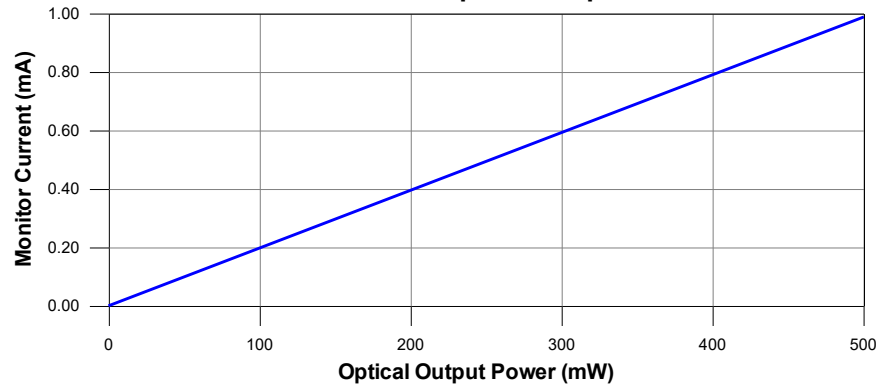

Slope Efficiency v.s. Case Temperature

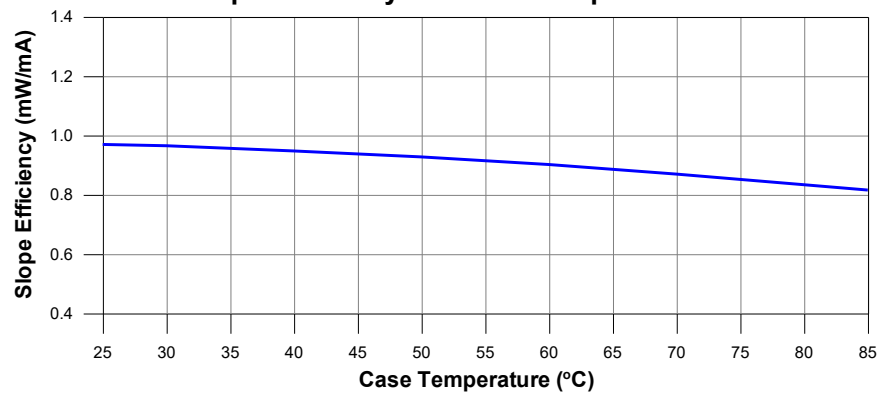

Threshold Current v.s. Case Temperature

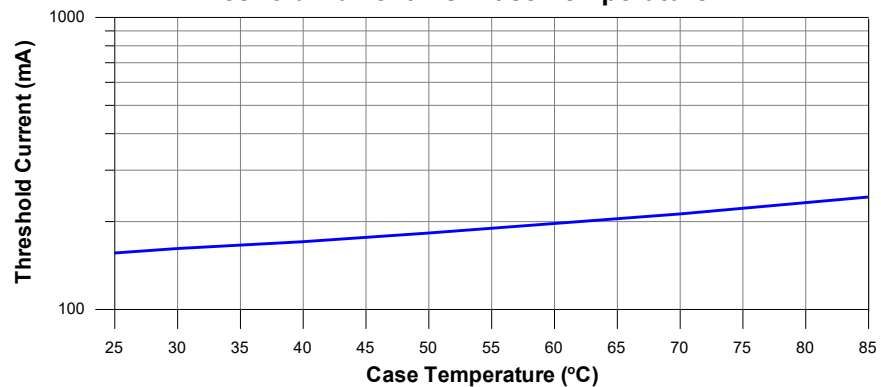

Ver.A

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.