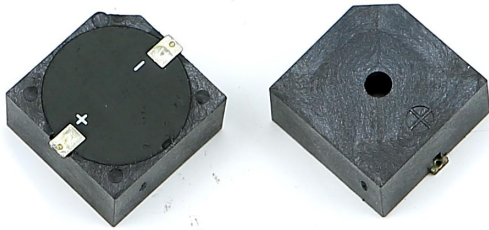


Product Code:

LPB1580DS-HS-05-4.0-R


Picture:

Specification:


Rated Voltage	(VDC)	5
Operating Voltage	(VDC)	3~16
*Rated Current	(mA)	≤5
*Sound Output at 10cm	(dB)	≥80
*Resonance Frequency	(KHz)	4.0±0.5
Tone		Continuous
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.7
Housing Material		PPS
RoHS		Yes
MSL(Moisture Sensitivity Level)		5a(≤30°C/60%RH 24H Floor life)

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

SPL & Current Consumption vs. Input Voltage:

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

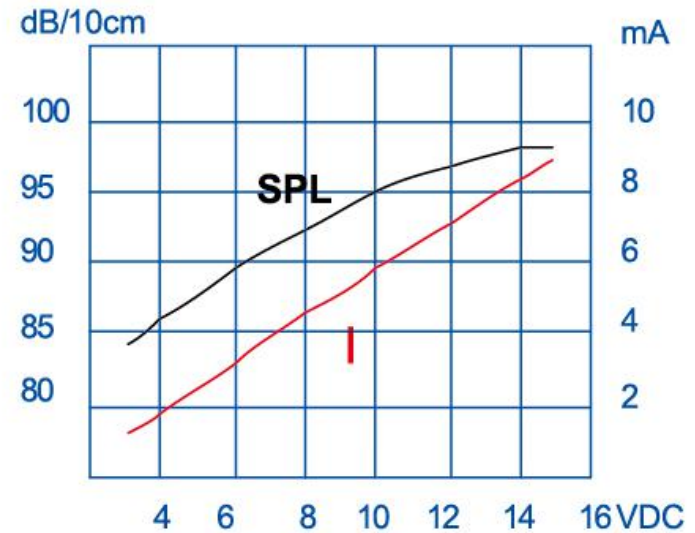
Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

