

## MCP3561/2/4

One-Two-Four-Channel, 153.6 ksps, Low-Noise 24-bit Delta-Sigma ADCs

### General Information

The MCP3561/2/4 are 1/2/4-channel, 24-bit, Delta-Sigma Analog-to-Digital Converters (ADCs) with programmable data rate of up to 153.6 ksps. They offer integrated features such as internal oscillator, temperature sensor and burnout sensor detection. The MCP3561/2/4 ADCs are fully configurable with Oversampling Ratio (OSR) from 32 to 98304 and gain from 1/3x to 64x. These devices include an internal sequencer (SCAN mode) with multiple monitor channels and a 24-bit timer to be able to automatically create conversion loop sequences without needing MCU communications. The MCP3561/2/4 devices are available in a leaded 20-lead TSSOP package, as well as in an ultra-small, 3 mm x 3 mm 20-lead UQFN package and are specified over an extended temperature range from -40°C to +125°C.



### Features

- 24-bit resolution
- Programmable data rate: up to 153.6 ksps
- Programmable gain: 0.33x to 64x
- 106.7 dB SINAD, -116 dBc THD, 120 dBc SFDR
- (Gain = 1x, 4800 SPS)
- Low-temperature drift:
  - Offset error drift: 4/Gain nV/°C (AZ\_MUX = 1)
  - Gain error drift: 0.5 ppm/°C (Gain = 1x)
- Low noise: 90 nVRMS (Gain = 16x, 12.5 SPS)
- RMS ENOB: up to 23.3 bits
- Wide input voltage range: 0V to AVDD
- Differential voltage reference inputs
- Internal oscillator or external clock selection

- Ultra-low full shutdown current consumption (< 5 µA)
- Internal temperature sensor
- Burnout current sources for sensor open/short detection
- 24-bit digital offset and gain error calibration registers


### Applications

- Precision sensor transducers and transmitters
- Factory automation and process controls
- Portable instrumentation
- Temperature measurements

### Benefits

- Several applications with higher resolution and faster programmable data rates
- Smaller footprint takes less space and reduces design cost
- Integrated features eliminate the need for external components

### Total System Solution (TSS) for a Ventilator

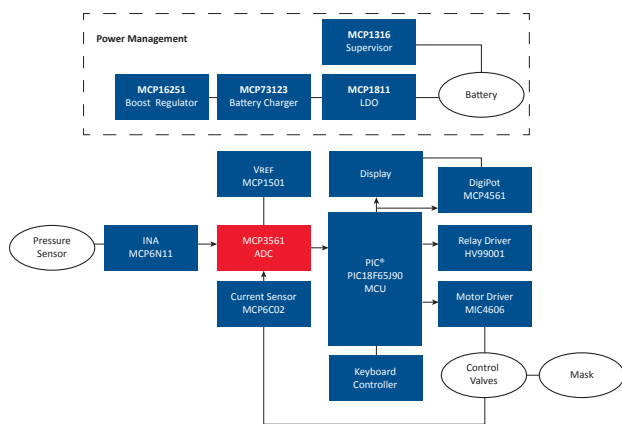

The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated. All Rights Reserved. 4/20

DS20006339A