

LED light bar OPBxx3014-21024WO - PRODUCT DATASHEET



Voltage	24 V DC
Power	18,0 W/m
Luminocity	1900 lm/m
Qty LED	210 LED/m
Distance between LED	4,76 mm
Can be cut into section	3,33 cm

Powered by



Basic information:


- PL LINE PRODUCT- PROFESSIONAL LINE, HIGHEST QUALITY, LUMINOSITY AND DURABILITY
- PROFESSIONAL PCB MOUNTING, ONLY BRAND-NAME LED DIODES (OSRAM)
- THICK DIODES SPACING ALLOWS TO CREATE CONSISTENT LIGHT LINE
- MODULES CAN BE JOINED INTO LONGER STRINGS (MAXIMUM LENGHT OF LED SECTION WITH ONE POWER-SUPPLY POINT: 5M), NEEDS COOLING

Typical application:

- UTILITY LIGHTING
- CEILING, WALL, NICHE, SHELF, PASSAGEWAYS BACKLIGHTING
- ADVERTISING (SIGNBOARDS): SHOP, MUSEUM, TARDE FAIRS EXPOSITIONS ETC.
- POWERFUL UTILITY LIGHTING


Explanation:

- "xx" - COLOR DESIGNATION E.G. WH, WN AND WW

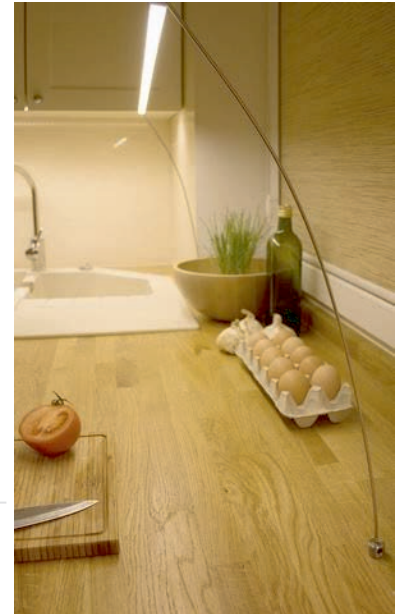
IP20

Additional Information

Color	Cool white WH	Neutral white WN	Warm white WW	Warm white WW
Voltage			24 V DC	
Power			18,0 W/m	
Power of single LED			0,10 W	
Current			0,75 A/m	
Luminocity	1900 lm/m	1900 lm/m	1840 lm/m	1660 lm/m
Qty LED			210 LED/m	
Distance between LED			4,76 mm	
Can be cut into section			3,33 cm	
Width			10 mm	
Height			3 mm	
Color temperature / Wavelength scope	5700 K	4000 K	3000 K	2700 K
Beam angle			120°	
Color rendering index (Ra)			80	
Operating temperature			-25 - +60°C	
Storage temperature			-40 - +80°C	
IP degree			IP20	

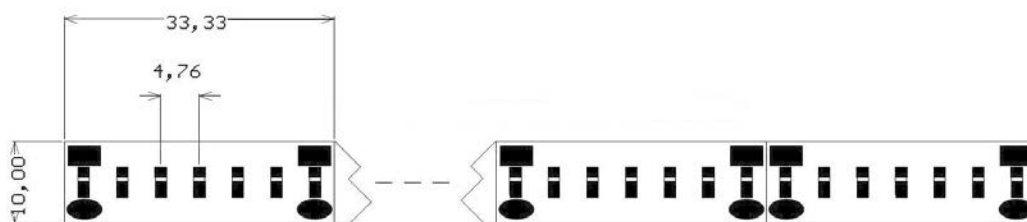

In spite of all our efforts, we do not guarantee, that technical data doesn't include any mistakes or defects, which can't be basis of any claiming. Figures and pictures are for illustration only and can be different from authentic appearance of product.