

**0.39 Inch Single Digit Display**
**OSL10396-IX (Common Anode type)**
**OSL10396-LX (Common Cathode type)**
**■ Features**

- 0.39 Inch Single Digit Display
- Long lifetime operation
- IC compatible
- Low power dissipation
- Black **surface** & white segment or dot
- Number of Pins:10

**■ Applications**

- Counting device
- Clock

**■ Absolute Maximum Rating** (Ta=25°C)

Item	Symbol	Value			Unit
		RA/R/YG/Y	W/B/G		
DC Forward Current	I <sub>F</sub>	20	20		mA
Pulse Forward Current#	I <sub>FP</sub>	100	100		mA
Reverse Voltage	V <sub>R</sub>	5	5		V
Power Dissipation	P <sub>t</sub>	44	66		mW
Operating Temperature	Topr	-30 ~ +70			°C
Storage Temperature	Tstg	-40~ +85			°C
Lead Soldering Temperature(1.6mm from seating plane)	Tsol	260°C/5sec			°C

#Pulse width Max.10ms Duty ratio max 1/10

**■ Electrical -Optical Characteristics** (Ta=25°C)

Part Number	Color	V <sub>F</sub> (V)			I <sub>R</sub> (μA)	Iv(mcd)			λD(nm)				
		Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
		I <sub>F</sub> =20mA			V <sub>R</sub> =5V	I <sub>F</sub> =20mA							
OSL10396-IW(LW)	White	W	-	3.3	3.6	20	-	65	-	CCT:5500-6500-8500K			
OSL10361-IB(LB)	Blue	B		-	3.3	3.6	20	-	50	-	460	470	475
OSL10396-IG(LG)	Pure Green	G		-	3.3	3.6	20	-	200	-	515	525	530
OSL10396-IYG(LYG)	Yellow Green	YG		-	2.2	2.6	20	-	12	-	565	571	575
OSL10396-IY(LY)	Yellow	Y		-	2.1	2.5	20	-	40	-	585	590	595
OSL10396-IO(LO)	Orange	O		-	2.1	2.5	20	-	30	-	600	605	610
OSL10396-IR(LR)	Red	R		-	2.1	2.5	20	-	20	-	625	635	650
OSL10396-IRA(LRA)	Red	R		-	2.1	2.5	20	-	100	-	620	625	630

\*1 Tolerance of measurements of chromaticity coordinate is ±10%

\*2 Tolerance of measurements of dominant wavelength is ±1nm

\*3 Tolerance of measurements of luminous intensity is ±15%

\*4 Tolerance of measurements of forward voltage is ±0.1V

**LED & Application Technologies**

**REACH**  
The new EU chemicals legislation




**OptoSupply**

*Light It Up*

**0.39 Inch Single Digit Display**

**OSL10396-IX (Common Anode type)**

**OSL10396-LX (Common Cathode type)**






### ■ Package Dimensions and Pin Function

#### OSL10396-IX (Common Anode type)

Note:

1, Unit : mm ( Tolerance: $\pm 0.25$ mm unless otherwise noted)

2, The slope angle of any PIN may be $\pm 5.0^{\circ}$ Max


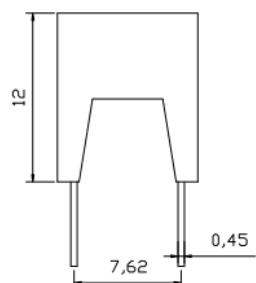
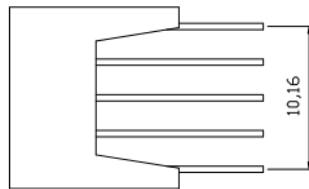
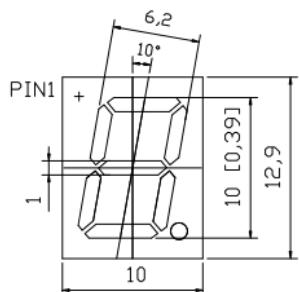
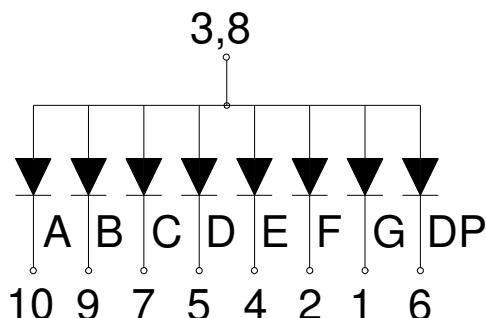


#### OSL10396-LX (Common Cathode type)

Note:

1, Unit : mm ( Tolerance: $\pm 0.25$ mm unless otherwise noted)

2, The slope angle of any PIN may be $\pm 5.0^{\circ}$ Max

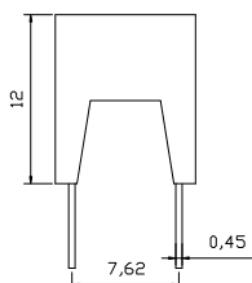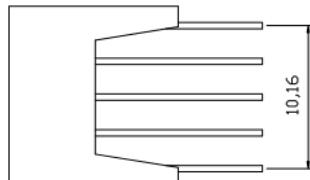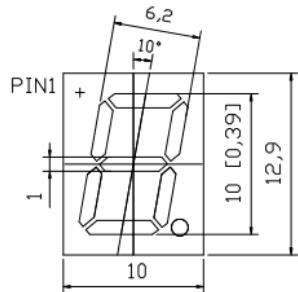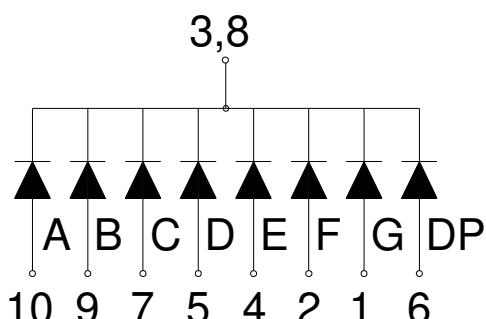

**LED & Application Technologies**



**REACH**  
The new EU chemicals legislation

