

CURRENT REGULATIVE LED


CRLED

- CRLED is LED which supplies constant current to keep LED Intensity Consistency even when power supply voltage fluctuations or load impedance fluctuations occur.
- CRLED is used with current stabilization and current limiting

■Features

- High Luminous LED
- 10mm Bullet Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

■Outline Dimension

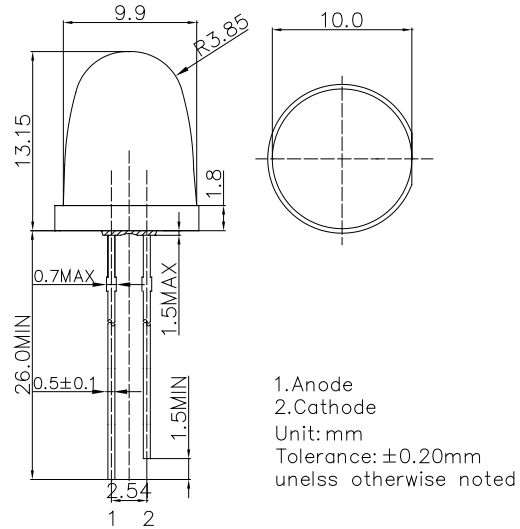


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Voltage	V _F	20	V
Power Dissipation	P _D	320	mW
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Lead Soldering Temperature	Tsol	260°C/5sec	-

■Directivity

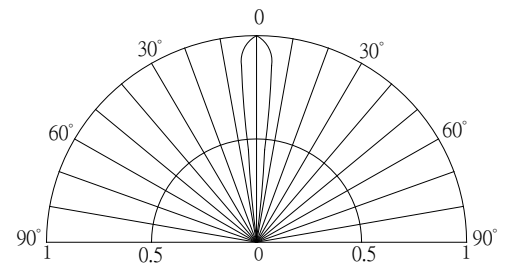

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color	V _F (V)*		I _F (mA)			I _R (μA)	I _v (mcd)*			λD(nm)*			2θ1/2(deg)
		Min.	Max.	Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
OSW5DKA201A-CRLED14	White	5.5	20		14	-	10	-	60000	-	X=0.27, Y=0.28(CCT:8500-18000)			8
OSM5DKA201A-CRLED14	Warm White	5.5	20		14	-	10	-	60000	-	X=0.44, Y=0.41(CCT:2700-3300)			8
OSB5SAA201A-CRLED14	Blue	5.5	20		14	-	10	-	10000	-	465	470	475	8
OSG5DAA201A-CRLED14	Pure Green	5.5	20		14	-	10	-	60000	-	520	525	530	8
OSY5PAA201A-CRLED14	Yellow	5	20		14	-	10	-	14400	-	585	590	595	8
OSO5PAA201A-CRLED14	Orange	5	20		14	-	10	-	14400	-	600	605	610	8
OSR5PAA201A-CRLED14	Red	5	20		14	-	10	-	14400	-	620	625	630	8

*1 Tolerance of measurements of chromaticity coordinate is ±10%


*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is±0.1V

■Applications

- Electronic Signs And Signals/ Small Area Illuminations
- Back Lighting/ Toys/ Other Lighting

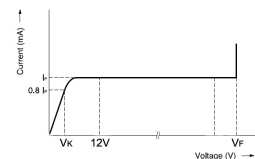


Explanation of terms
I_r Pinch-off current at 12v
V_k Voltage which produces 0.8Ip or greater current
V_r Breakdown voltage

Current Regulative LED
10mm Bullet LED
OSXXXXA201A-CRLED14

■ **Typical Applications**

1 : Single LED



2 : Multi- LEDs in series

