

PGK00145 LASER SENSORS • FORKED LIGHT BARRIER

sensor laser, fork, 150x24x160mm, fork width 100mm, 15-30V DC, 2x Push-pull NC/NO, 0-10 V, Plug-in connection 8pin, Glass, Red light



MECHANICAL FEATURES

| MECHANICAL FEATORES | |
|--|---|
| Design | Cuboid |
| Diameter detection | + |
| Fork depth | 100 mm |
| Fork light barrier design | Furcate |
| Fork width | 100 mm |
| Installation bracket | - |
| Material of optical surface | Glass |
| Sensor height | 150 mm |
| Sensor length | 24 mm |
| Sensor width | 160 mm |
| ELECTRICAL FEATURES | |
| Analog output 0 V 10 V | + |
| Analog output 4 mA 20 mA | - |
| Connection to amplifier | - |
| Dynamic switching output | - |
| Equipment protection class | Protection class 3 |
| Measurement of light beam coverage | + |
| Number of pins | 8 |
| Number of pins of the communication interface | 4 |
| Number of switching outputs | 2 |
| Operating voltage | 15 V 30 V |
| Scanning function | Light-/dark-on mode |
| Type of analog output | 0-10 V |
| Type of communication interface | Connector M5 |
| Type of electrical connection | Plug-in connection |
| Type of plug-in contact, communication interface | Female (socket) |
| Type of switching function | Normally closed contact/normally open contact |
| Type of switching output | Push-pull |
| Type of the forked light barrier | Standard |
| Voltage type | DC |
| With communication interface, analog | - |
| With communication interface, RS-232 | + |

IPF ELECTRONIC


ELECTRICAL FEATURES

| ELECTRICAL FEATURES | |
|--------------------------|------------------------|
| With other analog output | - |
| With time function | - |
| OPTICAL FEATURES | |
| | |
| Min. object size | 0.16 mm |
| Resolution | 16 µm |
| Laser class | Class 2 |
| Line field length | 16 |
| | |
| OTHER FEATURES | |
| Edge control | + |
| Feeding technology | + |
| | |
| Other | |
| Packaging dimensions | 230mm x 61.0mm x 290mm |
| Shipping weight | 0.59kg |
| Tariff code | 85365019 |
| | |

Classification

| ipf product group | 165 |
|-------------------|----------|
| eClass 8.0 | 27270909 |
| eClass 9.0 | 27270909 |
| eClass 9.1 | 27270909 |
| ETIM-5.0 | EC002720 |
| ETIM-6.0 | EC002720 |
| ETIM-7.0 | EC002720 |

Connection

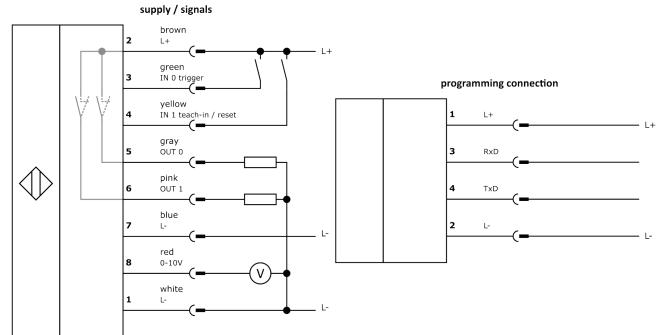



Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!





Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.